

**IPP 3D Printing Extensions 0.1  
(3D)**

Status: Initial

Abstract: This white paper defines an extension to the Internet Printing Protocol that supports printing of physical objects by Additive Manufacturing devices such as 3D printers.

This document is a White Paper. For a definition of a "White Paper", see:

<http://ftp.pwg.org/pub/pwg/general/pwg-process30.pdf>

This document is available electronically at:

<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150413.docx>

<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150413.pdf>

1 Copyright © 2015 The Printer Working Group All rights reserved.

2 Title: *IPP 3D Printing Extensions (3D)*

3 The material contained herein is not a license, either expressed or implied, to any IPR  
4 owned or controlled by any of the authors or developers of this material or the Printer  
5 Working Group. The material contained herein is provided on an “AS IS” basis and to the  
6 maximum extent permitted by applicable law, this material is provided AS IS AND WITH  
7 ALL FAULTS, and the authors and developers of this material and the Printer Working  
8 Group and its members hereby disclaim all warranties and conditions, either expressed,  
9 implied or statutory, including, but not limited to, any (if any) implied warranties that the use  
10 of the information herein will not infringe any rights or any implied warranties of  
11 merchantability or fitness for a particular purpose.

12

| <b>Table of Contents</b> |   |
|--------------------------|---|
| 13                       |   |
| 14                       | 1. Introduction .....6  |
| 15                       | 2. Terminology .....6   |
| 16                       | 2.1 Terms Used in This Document.....6                         |
| 17                       | 2.2 Acronyms and Organizations .....7                         |
| 18                       | 3. Rationale for IPP 3D Printing Extensions .....8            |
| 19                       | 3.1 Use Cases.....8   |
| 20                       | 3.1.1 Print a 3D Object .....8                                |
| 21                       | 3.1.2 Print a 3D Object Using Loaded Materials.....8          |
| 22                       | 3.1.3 Print a 3D Object with Multiple Materials .....8        |
| 23                       | 3.1.4 View a 3D Object During Printing .....9                 |
| 24                       | 3.2 Exceptions.....9  |
| 25                       | 3.2.1 Clogged Extruder.....9                                  |
| 26                       | 3.2.2 Extruder Temperature Out of Range .....9                |
| 27                       | 3.2.3 Extruder Head Movement Issues .....9                    |
| 28                       | 3.2.4 Filament Feed Jam.....9                                 |
| 29                       | 3.2.5 Filament Feed Skip.....9                                |
| 30                       | 3.2.6 Material Empty.....9                                    |
| 31                       | 3.2.7 Material Adhesion Issues.....10                         |
| 32                       | 3.2.8 Print Bed Temperature Out of Range.....10               |
| 33                       | 3.2.9 Print Bed Not Clear.....10                              |
| 34                       | 3.3 Out of Scope .....10                                      |
| 35                       | 3.4 Design Requirements.....10                                |
| 36                       | 4. Technical Solutions/Approaches.....11                      |
| 37                       | 4.1 High-Level Model .....11                                  |
| 38                       | 4.1.1 Build Platforms.....12                                  |
| 39                       | 4.1.2 Cameras .....12   |
| 40                       | 4.1.3 Cutters .....12   |
| 41                       | 4.1.4 Fans.....12   |
| 42                       | 4.1.5 Lamps .....12   |
| 43                       | 4.1.6 Lasers .....12  |
| 44                       | 4.1.7 Markers (or Extruders).....12                           |
| 45                       | 4.1.8 Motors.....12   |
| 46                       | 4.1.9 Reservoirs.....12                                       |
| 47                       | 4.2 Coordinate System.....13                                  |
| 48                       | 5. New Attributes.....13                                      |
| 49                       | 5.1 Job Template Attributes .....13                           |
| 50                       | 5.1.1 materials-col (1setOf collection) .....13               |
| 51                       | 5.1.2 print-fill-density (integer(0:100)).....15              |
| 52                       | 5.1.3 print-fill-thickness (integer(0:MAX)) .....15           |
| 53                       | 5.1.4 print-layer-thickness (integer(0:MAX)).....15           |
| 54                       | 5.1.5 print-rafts (type2 keyword) .....15                     |
| 55                       | 5.1.6 print-shell-thickness (integer(0:MAX)) .....16          |
| 56                       | 5.1.7 print-supports (type2 keyword) .....16                  |
| 57                       | 5.1.8 printer-bed-temperature (integer   no-value).....16     |
| 58                       | 5.1.9 printer-chamber-temperature (integer   no-value).....16 |

59 5.1.10 printer-fan-speed (integer(0:100))..... 16

60 5.2 Printer Description Attributes..... 16

61 5.2.1 materials-col-database (1setOf collection) ..... 16

62 5.2.2 materials-col-default (1setOf collection) ..... 17

63 5.2.3 materials-col-ready (1setOf collection) ..... 17

64 5.2.4 materials-col-supported (1setOf type2 keyword)..... 17

65 5.2.5 material-diameter-supported (1setOf (integer | rangeOfInteger))..... 17

66 5.2.6 material-feed-rate-supported (1setOf (integer | rangeOfInteger))..... 17

67 5.2.7 material-type-supported (1setOf type2 keyword)..... 17

68 5.2.8 print-fill-density-default (integer(0:100))..... 17

69 5.2.9 print-fill-thickness-default (integer(0:MAX)) ..... 17

70 5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX) |

71 rangeOfInteger(0:MAX)))..... 17

72 5.2.11 print-layer-order (type1 keyword)..... 18

73 5.2.12 print-layer-thickness-default (integer(0:MAX))..... 18

74 5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX) |

75 rangeOfInteger(0:MAX)))..... 18

76 5.2.14 print-rafts-default (type2 keyword)..... 18

77 5.2.15 print-rafts-supported (1setOf type2 keyword) ..... 18

78 5.2.16 print-shell-thickness-default (integer(0:MAX)) ..... 18

79 5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX) |

80 rangeOfInteger(0:MAX)))..... 18

81 5.2.18 print-supports-default (type2 keyword) ..... 18

82 5.2.19 print-supports-supported (1setOf type2 keyword) ..... 18

83 5.2.20 printer-bed-temperature-default (integer | no-value)..... 18

84 5.2.21 printer-bed-temperature-supported (1setOf (integer | rangeOfInteger))..... 19

85 5.2.22 printer-chamber-temperature-default (integer | no-value)..... 19

86 5.2.23 printer-chamber-temperature-supported (1setOf (integer | rangeOfInteger))... 19

87 5.2.24 printer-fan-speed-default (integer(0:MAX))..... 19

88 5.2.25 printer-fan-speed-supported (boolean) ..... 19

89 5.2.26 printer-head-temperature-supported (1setOf integer | rangeOfInteger) ..... 19

90 5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX) |

91 rangeOfInteger(0:MAX)))..... 19

92 5.2.28 filament-speed-supported (1setof (integer(0:MAX) | rangeOfInteger(0:MAX))) 19

93 5.2.29 print-speed-supported (1setOf integer(1:MAX) | rangeOfInteger(1:MAX))..... 19

94 5.2.30 printer-accuracy-supported (collection) ..... 20

95 5.2.31 printer-volume-supported (collection) ..... 20

96 5.3 Printer Status Attributes ..... 20

97 5.3.1 printer-bed-temperature-current (integer | no-value) ..... 20

98 5.3.2 printer-chamber-temperature-current (integer | no-value) ..... 20

99 5.3.3 printer-fan-speed-current (integer(0:100)) ..... 20

100 5.3.4 printer-head-temperature-current (1setOf (integer | no-value)) ..... 20

101 5.4 Other Potential Attributes ..... 20

102 6. New Values for Existing Attributes..... 21

103 6.1 ipp-features-supported (1setOf type2 keyword)..... 21

104 6.2 printer-state-reasons (1setOf type2 keyword)..... 21

105 7. Object Definition Languages (ODLs) .....22

106 7.1 Additive Manufacturing Format (AMF) .....22

107 7.2 Standard Tessellation Language (STL).....22

108 7.3 G-Code.....22

109 7.4 S3G/X3G File Format.....22

110 8. Internationalization Considerations.....23

111 9. Security Considerations .....24

112 10. References.....24

113 11. Author's Address.....26

114 12. Change History .....27

115 12.1 April 13, 2014 .....27

116 12.2 April 5, 2015 .....27

117 12.3 January 23, 2015.....27

**List of Figures**

120

121 Figure 1 - Typical Build Platform Coordinate System ..... 13

**List of Tables**

122

123

124

125 Table 1 - 3D Printer Subunits..... 11

126

127

## 128 **1. Introduction**

129 This white paper defines an extension to the Internet Printing Protocol (IPP) that supports  
130 printing of physical objects by Additive Manufacturing devices such as three-dimensional  
131 (3D) printers. The attributes and values defined in this document have been prototyped  
132 using the CUPS software [CUPS].

133 The primary focus of this document is on popular Fused Deposition Modeling (FDM)  
134 devices that melt and extrude ABS and PLA filaments in layers to produce a physical, 3D  
135 object. However, the same attributes can be used for other types of 3D printers that use  
136 different methods and materials such as Laser Sintering of powdered materials and curing  
137 of liquids using ultraviolet light.

138 This document also does not address the larger issue of choosing a common Object  
139 Definition Language (ODL) for interoperability, however there are suggested MIME media  
140 type names listed in section 7 for several formats in common use.

## 141 **2. Terminology**

### 142 **2.1 Terms Used in This Document**

143 *Additive Manufacturing*: A 3D printing process where material is progressively added to  
144 produce the final output.

145 *Binder Jetting*: A 3D printing process that uses a liquid binder that is jetted to fuse layers of  
146 powdered materials.

147 *Digital Light Processing*: A 3D printing process that uses light with a negative image to  
148 selectively cure layers of a liquid material.

149 *Fused Deposition Modeling*: A 3D printing process that extrudes a molten material to draw  
150 layers.

151 *Laser Sintering*: A 3D printing process that uses a laser to melt and fuse layers of  
152 powdered materials.

153 *Material Jetting*: A 3D printing process that jets the actual build materials in liquid or molten  
154 state to produce layers.

155 *Selective Deposition Lamination*: A 3D printing process that laminates cut sheets of  
156 material.

157 *Stereo Lithography*: A 3D printing process that uses a laser to cure and fuse layers of  
158 liquid materials.

159 *Subtractive Manufacturing*: A 3D printing process where material is progressively removed  
160 to produce the final output.

## 161 **2.2 Acronyms and Organizations**

162 *CNC*: Computer Numerical Control

163 *DLP*: Digital Light Processing

164 *FDM*: Fused Deposition Modeling

165 *IANA*: Internet Assigned Numbers Authority, <http://www.iana.org/>

166 *IETF*: Internet Engineering Task Force, <http://www.ietf.org/>

167 *ISO*: International Organization for Standardization, <http://www.iso.org/>

168 *PWG*: Printer Working Group, <http://www.pwg.org/>

169 *SD*: SD Card Association, <http://www.sdcard.org/>

170 *SDL*: Selective Deposition Lamination

171 *SL*: Stereo Lithography

172 *USB*: Universal Serial Bus, <http://www.usb.org/>

173

## 174 **3. Rationale for IPP 3D Printing Extensions**

175 Existing specifications define the following:

- 176 1. IPP/2.0 Second Edition [PWG5100.12] defines version 2.0, 2.1, and 2.2 of the  
177 Internet Printing Protocol which defines a standard operating and data model,  
178 interface protocol, and extension mechanism to support traditional Printers;
- 179 2. IPP Everywhere [PWG5100.14] defines a profile of existing IPP specifications,  
180 standard Job Template attributes, and standard document formats;
- 181 3. The Standard Specification for Additive Manufacturing File Format (AMF)  
182 Version 1.1 [ISO52915] defines an XML schema and file format for describing  
183 3D objects with one or more materials;
- 184 4. The SLC File Specification [STLFORMAT] defines a file format (commonly  
185 called "STL files") for describing 3D object with a single material;
- 186 5. The Interchangeable Variable Block Data Format for Positioning, Contouring,  
187 and Contouring/Positioning Numerically Controlled Machines [RS274D] defines  
188 the "G-code" format that is commonly used by 3D printers; and
- 189 6. The S3G protocol [S3G] defines a simple network protocol and file format for  
190 controlling 3D printers.

191 Therefore, this IPP 3D Printing Extensions (3D) document should define IPP attributes,  
192 values, and operations needed to support printing of 3D objects, status monitoring of 3D  
193 printers and print jobs, and configuration of 3D printer characteristics and capabilities.

### 194 **3.1 Use Cases**

#### 195 **3.1.1 Print a 3D Object**

196 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects  
197 a 3D printer on the network, specifies material and print settings, and submits the object  
198 for printing.

#### 199 **3.1.2 Print a 3D Object Using Loaded Materials**

200 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects  
201 a 3D printer on the network that has the material(s) she wishes to use, specifies additional  
202 print settings, and submits the object for printing.

#### 203 **3.1.3 Print a 3D Object with Multiple Materials**

204 Jane wants to print a multi-material object on a single-material Printer. Jane uses software  
205 on her Client device to create Document data that instructs the Printer to pause printing  
206 and provide status information at specific layers so that she can change materials at the  
207 Printer and resume printing with the new material.



### 208 **3.1.4 View a 3D Object During Printing**

209 Jane has submitted a 3D print Job that will take 4 hours to complete. She can visually  
210 monitor the progress of the Job through a web page provided by the Printer.

## 211 **3.2 Exceptions**

### 212 **3.2.1 Clogged Extruder**

213 While printing a 3D object, the extruder becomes clogged. The printer stops printing and  
214 sets the corresponding state reason to allow Jane's Client device to discover the issue and  
215 display an appropriate alert.

### 216 **3.2.2 Extruder Temperature Out of Range**

217 While printing a 3D object, the extruder temperature goes out of range for the material  
218 being printed. The printer pauses printing until the temperature stabilizes and sets the  
219 corresponding state reason to allow Jane's Client device to discover the issue and display  
220 an appropriate alert.

### 221 **3.2.3 Extruder Head Movement Issues**

222 While printing a 3D object, the extruder head movement becomes irregular. The Printer  
223 stops printing and sets the corresponding state reason to allow Jane's Client device to  
224 discover the issue and display an appropriate alert.

### 225 **3.2.4 Filament Feed Jam**

226 While printing a 3D object, the filament jams and cannot be fed into the extruder. The  
227 printer stops printing and sets the corresponding state reason to allow Jane's Client device  
228 to discover the issue and display an appropriate alert.

### 229 **3.2.5 Filament Feed Skip**

230 While printing a 3D object, the filament extrusion rate is insufficient to maintain proper  
231 printing. The printer stops printing and sets the corresponding state reason to allow Jane's  
232 Client device to discover the issue and display an appropriate alert.

### 233 **3.2.6 Material Empty**

234 While printing a 3D object, the printer runs out of the printing material. The printer pauses  
235 printing until more material is loaded and sets the corresponding state reason to allow  
236 Jane's Client device to discover the issue and display an appropriate alert.

### 237 **3.2.7 Material Adhesion Issues**

238 While printing a 3D object, the printed object releases from the build platform or the current  
239 layer is not adhering to the previous one. The printer stops printing and sets the  
240 corresponding state reason to allow Jane's Client device to discover the issue and display  
241 an appropriate alert.

### 242 **3.2.8 Print Bed Temperature Out of Range**

243 While printing a 3D object, the print bed temperature goes out of the requested range. The  
244 printer pauses printing until the temperature stabilizes and sets the corresponding state  
245 reason to allow Jane's Client device to discover the issue and display an appropriate alert.

### 246 **3.2.9 Print Bed Not Clear**

247 When starting to print a 3D object, the Printer detects that the build platform is not  
248 empty/clear. The Printer stops printing and sets the corresponding state reason to allow  
249 Jane's Client device to discover the issue and display an appropriate alert. The Printer  
250 starts printing once the build platform is cleared.

## 251 **3.3 Out of Scope**

252 The following are considered out of scope for this document:

- 253 1. Definition of new file formats; and
- 254 2. Support for Subtractive Manufacturing technologies such as CNC milling  
255 machines.

## 256 **3.4 Design Requirements**

257 The design requirements for this document are:

- 258 1. Define attributes and values to describe supported and loaded (ready) materials  
259 used for FDM; and
- 260 2. Define attributes and values to describe FDM printer capabilities and state

261 The design recommendations for this document are:

- 262 1. Support 3D printing technologies other than FDM

263

## 264 4. Technical Solutions/Approaches

265 Current 3D printers offer limited connectivity and status monitoring capabilities. Many  
266 printers simply print G-code files from SD memory cards, with all interaction and status  
267 monitoring happening at the printer's console.

268 Makerbot Industries uses a proprietary protocol [S3G] and file format that generalizes  
269 some aspects of the interface between a host device and 3D printer. However, this  
270 solution is highly specific to FDM printing and does not offer any spooling or security  
271 functionality.

272 Various other proprietary protocols and interfaces are also in use, typically based on the  
273 USB serial protocol class for direct connection to a host device. And there are a number of  
274 Cloud-based solutions emerging that utilize a proxy device that communicates with the  
275 Cloud and 3D printer.

276 Given that the 3D printing industry and technologies are still undergoing a great deal of  
277 change and development, certain aspects of 3D printing may be difficult or infeasible to  
278 standardize. However, a stable, reliable, and secure interface between host device (IPP  
279 Client) and 3D printer (IPP Printer) can be defined today in a way that allows for future  
280 changes to be incorporated without difficulty.

### 281 4.1 High-Level Model

282 IPP [RFC2911] and the IETF Printer MIB [RFC3805] already define a comprehensive  
283 model for the operation and data elements of a typical 2D printer. The IPP Job processing  
284 model matches how 3D printers process Jobs and Documents. However, more types of  
285 subunits are used in a 3D printer, requiring additions to the model and state values. Table  
286 1 lists the subunits of 3D printers for different technologies.

287 **Table 1 - 3D Printer Subunits**

| Subunit                | Technology               |
|------------------------|--------------------------|
| Build Platforms        | All                      |
| Cameras                | All                      |
| Cutters                | SDL                      |
| Doors                  | All                      |
| Fans                   | FDM                      |
| Input Trays            | SDL                      |
| Lamps                  | DLP                      |
| Lasers                 | Laser Sintering, SL      |
| Marker Supplies        | All                      |
| Markers (or Extruders) | Many                     |
| Media Path             | SDL                      |
| Motors                 | All                      |
| Reservoirs             | DLP, Laser Sintering, SL |

**288 4.1.1 Build Platforms**

289 Build Platforms hold the printed object. The platform typically moves up or down during  
290 printing as layers are applied, although in some cases it moves along all three axis.

**291 4.1.2 Cameras**

292 Cameras typically show the Build Platforms, offering a visual progress/status reporting for  
293 remote users.

**294 4.1.3 Cutters**

295 Cutters are used to trim support material on printed objects and/or remove regions of  
296 media that are not part of the final printed object.

**297 4.1.4 Fans**

298 Fans are used to cool printed material and maintain proper extruder and material  
299 temperatures.

**300 4.1.5 Lamps**

301 Lamps are used by DLP printers to provide an ultraviolet light source for curing the liquid  
302 material while printing a layer. Lamps are also used to illuminate the Build Platforms.

**303 4.1.6 Lasers**

304 Lasers are used by Laser Sintering and Stereo Lithography (SL) printers to fuse powdered  
305 material or cure liquid material while printing a layer.

**306 4.1.7 Markers (or Extruders)**

307 Markers can be traditional subunits where an image is printed on sheets of paper (SDL),  
308 extruders that place material onto the Build Platform or previous layer, or projectors that  
309 display an inverse image on the surface of a liquid material (DLP).

**310 4.1.8 Motors**


311 Motors are used to move the Build Platforms and (in some cases) move the Markers.

**312 4.1.9 Reservoirs**

313 Reservoirs hold liquid or powdered material used to create the printed object.

## 314 4.2 Coordinate System

315 3D printers operate in three dimensions and thus have three axis of movement. Figure 1  
316 shows the coordinate system where the X axis represents the width of the object, the Y  
317 axis represents the depth of the object, and the Z axis represents the height of the object.

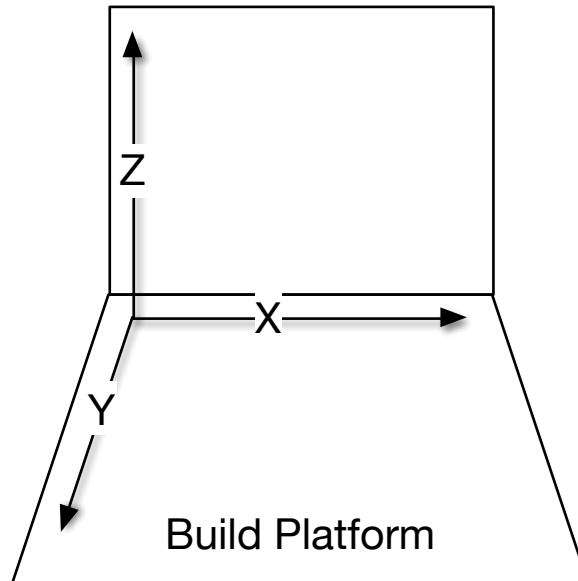

318

319 **Figure 1 - Typical Build Platform Coordinate System**

320 Filament usage by extrusion Printers is sometimes also modeled as an additional "E" axis,  
321 e.g., E1 for the first filament, E2 for the second filament, etc.

## 322 5. New Attributes

### 323 5.1 Job Template Attributes

#### 324 5.1.1 materials-col (1setOf collection)

325 This Job Template attribute defines the materials to be used for the Job. When specified,  
326 the Printer validates the requested materials both when the Job is created and when it  
327 enters the 'processing' state. If the requested materials are not loaded, the 'material-  
328 needed' keyword is added to the Printer's "printer-state-reasons" values and the Job is  
329 placed in the 'processing-stopped' state.

330 The Client typically supplies "materials-col" values matching those returned in the  
331 "material-cols-database" (section 5.2.1) or "materials-col-ready" (section 5.2.3) Printer  
332 Description attributes.

**333 5.1.1.1 material-color (type2 keyword)**

334 This member attribute provides a PWG media color value representing the color of the  
335 material.

**336 5.1.1.2 material-diameter (integer)**

337 This member attribute provides the diameter of the printed material in nanometers. This  
338 attribute is only applicable for Printers that extrude their material.

**339 5.1.1.3 material-feed-rate (integer)**

340 This member attribute provides the material feed rate in nanometers per second. This  
341 attribute is only applicable for Printers that extrude their material.

342 [Editor's note: Some feedback indicates that we might want to specify feed rate using  
343 volume...]

**344 5.1.1.4 material-key (keyword)**

345 This member attribute provides an unlocalized name of the material that can be localized  
346 using the strings file referenced by the "printer-strings-uri" Printer attribute.

**347 5.1.1.5 material-name (name(MAX))**

348 This member attribute provides a localized name of the material.

**349 5.1.1.6 material-type (type2 keyword)**

350 This member attribute specifies the type of material. Values include:

351 'abs\_filament': Acrylonitrile Butadiene Styrene (ABS) filament.

352 'chocolate\_powder': Chocolate powder.

353 'gold\_powder': Gold (metal) powder.

354 'photopolymer-resin\_liquid': Photopolymer (liquid) resin.

355 'pla\_filament': Polylactic Acid (PLA) filament.

356 'pla-conductive\_filament': Conductive PLA filament.

357 'pla-flexible\_filament': Flexible PLA filament.

358 'silver\_powder': Silver (metal) powder.

359 [Editor's note: This list needs to be expanded significantly...]

**360 5.1.1.7 filament-retraction-distance (integer(0:MAX))**

361 This member attribute specifies the filament retraction distance in nanometers. This  
362 attribute is only applicable to FDM Printers.

**363 5.1.1.8 filament-retraction-speed (integer(0:MAX))**

364 This member attribute specifies the filament retraction speed in nanometers per second.  
365 This attribute is only applicable to FDM Printers.

**366 5.1.1.9 extruder-temperature (integer | rangeOfInteger)**

367 This member attribute specifies the desired extruder temperature (or range of  
368 temperatures) in degrees Celsius. This attribute is only applicable to Printers that extrude  
369 their material.

**370 5.1.1.10 print-speed (integer(1:MAX))**

371 This member attribute specifies the print speed in nanometers per second.

**372 5.1.2 print-fill-density (integer(0:100))**

373 This Job Template attribute specifies the fill density of interior regions in percent.

**374 5.1.3 print-fill-thickness (integer(0:MAX))**

375 This Job Template attribute specifies the thickness of any fill walls in nanometers, with 0  
376 representing the thinnest possible walls.

377 [Editor's note: One comment requested speed/layer thickness attributes for infill regions.  
378 Right now print speed is a materials-col value - do we add a print-fill-material attribute to  
379 specify the fill material (which then gives us the speed), or do we move print-speed to a  
380 top-level attribute and then have print-fill-speed and print-shell-speed?]

**381 5.1.4 print-layer-thickness (integer(0:MAX))**

382 This Job Template attribute specifies the thickness of each layer in nanometers, with 0  
383 representing the thinnest possible layers.

**384 5.1.5 print-rafts (type2 keyword)**

385 This Job Template attribute specifies whether to print brims, rafts, or skirts under the  
386 object. Values include:

387 'none': Do not print brims, rafts, or skirts.

388 brim-N': Print brims using the Nth material, where N is an integer from 1 to the  
389 number of materials specified for the Job.

390 raft-N': Print rafts using the Nth material, where N is an integer from 1 to the number  
391 of materials specified for the Job.

392 skirt-N': Print skirts using the Nth material, where N is an integer from 1 to the  
393 number of materials specified for the Job.

394 'standard': Print brims, rafts, and/or skirts using implementation-defined default  
395 parameters.

#### 396 **5.1.6 print-shell-thickness (integer(0:MAX))**

397 This Job Template attribute specifies the thickness of exterior walls in nanometers, with 0  
398 representing the thinnest possible wall.

#### 399 **5.1.7 print-supports (type2 keyword)**

400 This Job Template attribute specifies whether to print supports under the object. Values  
401 include:

402 'none': Do not print supports.

403 'standard': Print supports using implementation-defined default parameters.

404 'material-N': Print supports using the Nth material, where N is an integer from 1 to  
405 the number of materials for the Job.

#### 406 **5.1.8 printer-bed-temperature (integer | no-value)**

407 This Job Template attribute specifies the desired Build Platform temperature in degrees  
408 Celsius. The 'no-value' value is used to disable temperature control on the Build Platform.

#### 409 **5.1.9 printer-chamber-temperature (integer | no-value)**

410 This Job Template attribute specifies the desired print chamber temperature in degrees  
411 Celsius. The 'no-value' value is used to disable temperature control in the print chamber.

#### 412 **5.1.10 printer-fan-speed (integer(0:100))**

413 This Job Template attribute specifies the desired fan speed in percent of maximum. A  
414 value of 0 turns the fans off during printing.

## 415 **5.2 Printer Description Attributes**

### 416 **5.2.1 materials-col-database (1setOf collection)**

417 This Printer Description attribute lists the pre-configured materials for the Printer. Each  
418 value contains the corresponding "materials-col" member attributes and will typically reflect  
419 vendor and site ("third party") materials that are supported by the Printer.



**420 5.2.2 materials-col-default (1setOf collection)**

421 This Printer Description attribute lists the default materials that will be used if the  
422 "materials-col" Job Template attribute is not specified.

**423 5.2.3 materials-col-ready (1setOf collection)**

424 This Printer Description attribute lists the materials that have been loaded into the Printer.  
425 Each value contains the corresponding "materials-col" member attributes.

**426 5.2.4 materials-col-supported (1setOf type2 keyword)**

427 This Printer Description attribute lists the "materials-col" member attributes that are  
428 supported by the Printer.

**429 5.2.5 material-diameter-supported (1setOf (integer | rangeOfInteger))**

430 This Printer Description attribute lists the supported diameters (or ranges of diameters) of  
431 extruded material in nanometers.

**432 5.2.6 material-feed-rate-supported (1setOf (integer | rangeOfInteger))**

433 This Printer Description attribute lists the supported feed rates (or ranges of feed rates) in  
434 nanometers per second.

435 [Editor's note: Some feedback indicates that we might want to specify feed rate using  
436 volume...]

**437 5.2.7 material-type-supported (1setOf type2 keyword)**

438 This Printer Description attribute lists the supported material types for the Printer.

**439 5.2.8 print-fill-density-default (integer(0:100))**

440 This Printer Description attribute specifies the default "print-fill-density" value in percent.

**441 5.2.9 print-fill-thickness-default (integer(0:MAX))**

442 This Printer Description attribute specifies the default "print-fill-thickness" value in  
443 nanometers.

**444 5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX) |  
445 rangeOfInteger(0:MAX)))**

446 This Printer Description attribute lists the supported "print-fill-thickness" values (or ranges  
447 of values) in nanometers.

**448 5.2.11 print-layer-order (type1 keyword)**

449 This Printer Description attribute specifies the order of layers when printing, either 'top-to-  
450 bottom' or 'bottom-to-top'.

**451 5.2.12 print-layer-thickness-default (integer(0:MAX))**

452 This Printer Description attribute specifies the default "print-layer-thickness" value in  
453 nanometers.

**454 5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX) |  
455 rangeOfInteger(0:MAX)))**

456 This Printer Description attribute lists the supported values (or ranges of values) for the  
457 "print-layer-thickness" Job Template attribute.

**458 5.2.14 print-rafts-default (type2 keyword)**

459 This Printer Description attribute specifies the default "print-rafts" value.

**460 5.2.15 print-rafts-supported (1setOf type2 keyword)**

461 This Printer Description attribute lists the supported "print-rafts" values.

**462 5.2.16 print-shell-thickness-default (integer(0:MAX))**

463 This Printer Description attribute specifies the default "print-shell-thickness" value in  
464 nanometers.

**465 5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX) |  
466 rangeOfInteger(0:MAX)))**

467 This Printer Description attribute lists the supported "print-shell-thickness" values (or  
468 ranges of values) in nanometers.

**469 5.2.18 print-supports-default (type2 keyword)**

470 This Printer Description attribute specifies the default "print-supports" value.

**471 5.2.19 print-supports-supported (1setOf type2 keyword)**

472 This Printer Description attribute lists the supported "print-supports" values.

**473 5.2.20 printer-bed-temperature-default (integer | no-value)**

474 This Printer Description attribute specifies the default "printer-bed-temperature" value in  
475 degrees Celsius.

476 **5.2.21 printer-bed-temperature-supported (1setOf (integer | rangeOfInteger))**

477 This Printer Description attribute lists the supported "printer-bed-temperature" values (or  
478 ranges of values) in degrees Celsius.

479 **5.2.22 printer-chamber-temperature-default (integer | no-value)**

480 This Printer Description attribute specifies the default "printer-chamber-temperature" value  
481 in degrees Celsius.

482 **5.2.23 printer-chamber-temperature-supported (1setOf (integer | rangeOfInteger))**

483 This Printer Description attribute lists the supported "printer-chamber-temperature" values  
484 (or ranges of values) in degrees Celsius.

485 **5.2.24 printer-fan-speed-default (integer(0:MAX))**

486 This Printer Description attribute specifies the default "printer-fan-speed" value in percent.

487 **5.2.25 printer-fan-speed-supported (boolean)**

488 This Printer Description attribute specifies whether the "printer-fan-speed" Job Template  
489 attribute is supported.

490 **5.2.26 printer-head-temperature-supported (1setOf integer | rangeOfInteger)**

491 This Printer Description attribute specifies the supported "printer-head-temperature" values  
492 (or ranges of values) in degrees Celsius.

493 **5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX) |  
494 rangeOfInteger(0:MAX)))**

495 This Printer Description attribute specifies the supported "filament-retraction-distance"  
496 values (or ranges of values) in nanometers.

497 **5.2.28 filament-speed-supported (1setof (integer(0:MAX) | rangeOfInteger(0:MAX)))**

498 This Printer Description attribute specifies the supported "filament-speed" values (or  
499 ranges of values) in nanometers per second.

500 **5.2.29 print-speed-supported (1setOf integer(1:MAX) | rangeOfInteger(1:MAX))**

501 This Printer Description attribute lists the supported "print-speed" values (or ranges of  
502 values) in nanometers per second.

### 503 **5.2.30 printer-accuracy-supported (collection)**

504 This Printer Description attribute specifies the absolute accuracy of the Printer. The "x-  
505 accuracy (integer(1:MAX))", "y-accuracy (integer(1:MAX))", and "z-accuracy  
506 (integer(1:MAX))" member attributes specify the accuracy in nanometers along each axis.

### 507 **5.2.31 printer-volume-supported (collection)**

508 This Printer Description attribute specifies the maximum build volume supported by the  
509 Printer. The "x-dimension (integer(1:MAX))", "y-dimension (integer(1:MAX))", and "z-  
510 dimension (integer(1:MAX))" member attributes specify the size in millimeters along each  
511 axis.

## 512 **5.3 Printer Status Attributes**

### 513 **5.3.1 printer-bed-temperature-current (integer | no-value)**

514 This Printer Status attribute provides the current Build Platform temperature in degrees  
515 Celsius. If the Build Platform is not temperature controlled, the 'no-value' value is returned.

### 516 **5.3.2 printer-chamber-temperature-current (integer | no-value)**

517 This Printer Status attribute provides the current print chamber temperature in degrees  
518 Celsius. If the print chamber is not temperature controlled, the 'no-value' value is returned.

### 519 **5.3.3 printer-fan-speed-current (integer(0:100))**

520 This Printer Status attribute provides the current fan speed in percent.

### 521 **5.3.4 printer-head-temperature-current (1setOf (integer | no-value))**

522 This Printer Status attribute provides the current extruder head temperatures in degrees  
523 Celsius. The 'no-value' value is returned when the extruder head is not temperature  
524 controlled.

## 525 **5.4 Other Potential Attributes**

526 Based on existing 3D printer software, the following parameters could also be candidates  
527 for standardization:

- 528 1. Initial layer thickness in nanometers
- 529 2. Initial layer line width in percent
- 530 3. Dual extrusion overlap in nanometers
- 531 4. Travel speed in nanometers per second
- 532 5. Bottom layer speed in nanometers per second
- 533 6. Infill speed in nanometers per second
- 534 7. Outer shell speed in nanometers per second

- 535 8. Inner shell speed in nanometers per second  
536 9. Minimum layer time in seconds or milliseconds

## 537 **6. New Values for Existing Attributes**

### 538 **6.1 ipp-features-supported (1setOf type2 keyword)**

539 This document suggests (but does not register) the new value 'ipp-3d'.

### 540 **6.2 printer-state-reasons (1setOf type2 keyword)**

541 This document suggests (but does not register) the following new values:

542 'camera-failure': A camera is no longer working.

543 'cutter-at-eol': A cutter has reached its end-of-life and will need to be replaced soon.

544 'cutter-failure': A cutter has failed.

545 'cutter-near-eol': A cutter is near its end-of-life and may need to be replaced soon.

546 'extruder-failure': An extruder has failed and requires maintenance or replacement.

547 'extruder-jam': An extruder is jammed or clogged.

548 'fan-failure': A fan has failed.

549 'lamp-at-eol': A lamp has reached its end-of-life and will need to be replaced soon.

550 'lamp-failure': A lamp has failed.

551 'lamp-near-eol': A lamp is near its end-of-life and may need to be replaced soon.

552 'laser-at-eol': A laser has reached its end-of-life and will need to be replaced soon.

553 'laser-failure': A laser has failed.

554 'laser-near-eol': A laser is near its end-of-life and may need to be replaced soon.

555 'material-empty': One or more build materials have been exhausted.

556 'material-low': One or more build materials may need replenishment soon.

557 'material-needed': One or more build materials need to be loaded for a processing  
558 Job.

559 'motor-failure': A motor has failed.

- 560 'reservoir-empty': One or more reservoirs are empty.
- 561 'reservoir-low': One or more reservoirs are almost empty.
- 562 'reservoir-needed': One or more reservoirs are empty but need to be filled for a  
563 processing Job.

## 564 **7. Object Definition Languages (ODLs)**

565 This section provides information on several commonly used ODLs with either existing  
566 (registered) or suggested MIME media types.

### 567 **7.1 Additive Manufacturing Format (AMF)**

568 AMF [ISO52915] is a relatively new format that was designed as a replacement for the  
569 Standard Tessellation Language (STL). Its use has been hampered by the lack of a freely-  
570 available specification, but has several advantages over STL including:

- 571 1. Shared vertices which eliminates holes and other breaks in the surface  
572 geometry of objects,
- 573 2. Specification of multiple materials in a single file,
- 574 3. Curved surfaces can be specified, and
- 575 4. Coordinates use explicit units for proper output dimensions.

576 The suggested (but not registered) MIME media type is model/amf'.

### 577 **7.2 Standard Tessellation Language (STL)**

578 STL [STLFORMAT] is widely supported by existing client software. The registered MIME  
579 media type is 'application/sla'.

### 580 **7.3 G-Code**

581 The G-code [RS274] format has long been a common low-level format used by 3D  
582 printers, with higher level formats being processed on the Client to produce G-code. The  
583 suggested (but not registered) MIME media type is 'application/g-code'.

### 584 **7.4 S3G/X3G File Format**

585 The S3G protocol [S3G] defines a simple protocol for communicating a binary encoding of  
586 G-code with a 3D printer. The encoding is also used as a low-level file format, typically  
587 using a "x3g" extension. The suggested (but not registered) MIME media type is  
588 'application/vnd.makerbot-s3g'.

589

## 590 8. Internationalization Considerations

591 For interoperability and basic support for multiple languages, conforming implementations  
592 MUST support:

- 593 5. The Universal Character Set (UCS) Transformation Format -- 8 bit (UTF-8)  
594 [STD63] encoding of Unicode [UNICODE] [ISO10646]; and
- 595 6. The Unicode Format for Network Interchange [RFC5198] which requires  
596 transmission of well-formed UTF-8 strings and recommends transmission of  
597 normalized UTF-8 strings in Normalization Form C (NFC) [UAX15].

598 Unicode NFC is defined as the result of performing Canonical Decomposition (into base  
599 characters and combining marks) followed by Canonical Composition (into canonical  
600 composed characters wherever Unicode has assigned them).

601 WARNING – Performing normalization on UTF-8 strings received from IPP Clients and  
602 subsequently storing the results (e.g., in IPP Job objects) could cause false negatives in  
603 IPP Client searches and failed access (e.g., to IPP Printers with percent-encoded UTF-8  
604 URIs now 'hidden').

605 Implementations of this document SHOULD conform to the following standards on  
606 processing of human-readable Unicode text strings, see:

607 Unicode Bidirectional Algorithm [UAX9] – left-to-right, right-to-left, and vertical

608 Unicode Line Breaking Algorithm [UAX14] – character classes and wrapping

609 Unicode Normalization Forms [UAX15] – especially NFC for [RFC5198]

610 Unicode Text Segmentation [UAX29] – grapheme clusters, words, sentences

611 Unicode Identifier and Pattern Syntax [UAX31] – identifier use and normalization

612 Unicode Character Encoding Model [UTR17] – multi-layer character model

613 Unicode in XML and other Markup Languages [UTR20] – XML usage

614 Unicode Character Property Model [UTR23] – character properties

615 Unicode Conformance Model [UTR33] – Unicode conformance basis+

616 Unicode Collation Algorithm [UTS10] – sorting

617 Unicode Locale Data Markup Language [UTS35] – locale databases

## 618 9. Security Considerations

619 In addition to the security considerations described in the IPP/1.1: Model and Semantics  
620 [RFC2911], the following sub-sections describe issues that are unique to 3D printing.

621 Implementations of this specification SHOULD conform to the following standards on  
622 processing of human-readable Unicode text strings, see:

623 Unicode Security Mechanisms [UTS39] – detecting and avoiding security attacks

624 Unicode Security FAQ [UNISECFAQ] – common Unicode security issues

625 [Editor's note: the rest is TBD but will include explosions, fires, and other physical risks that  
626 have been documented in the news and various documents and studies]

## 627 10. References

628 [ISO10646] "Information technology -- Universal Coded Character Set (UCS)",  
629 ISO/IEC 10646:2011

630 [ISO52915] "Standard Specification for Additive Manufacturing File Format (AMF)  
631 Version 1.1", ISO/ASTM 52915, 2013

632 [PWG5100.12] R. Bergman, H. Lewis, I. McDonald, M. Sweet, "IPP/2.0 Second  
633 Edition", PWG 5100.12-2011, February 2011,  
634 [http://www.pwg.org/pub/pwg/candidates/cs-ipp20-2011MMDD-  
635 5100.12.pdf](http://www.pwg.org/pub/pwg/candidates/cs-ipp20-2011MMDD-5100.12.pdf)

636 [PWG5100.14] M. Sweet, I. McDonald, A. Mitchell, J. Hutchings, "IPP Everywhere",  
637 PWG 5100.14, January 2013,  
638 <http://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128.pdf>

639 [RFC2911] T. Hastings, R. Herriot, R. deBry, S. Isaacson, P. Powell, "Internet  
640 Printing Protocol/1.1: Model and Semantics", RFC 2911, September  
641 2000, <http://www.ietf.org/rfc/rfc2911.txt>

642 [RFC3805] R. Bergman, H. Lewis, I. McDonald, "Printer MIB v2", RFC 3805, June  
643 2004, <http://www.ietf.org/rfc/rfc3805.txt>

644 [RFC5198] J. Klensin, M. Padlipsky, "Unicode Format for Network Interchange",  
645 RFC 5198, March 2008, <http://www.ietf.org/rfc/rfc5198.txt>

646 [RS274D] "Interchangeable Variable Block Data Format for Positioning,  
647 Contouring, and Contouring/Positioning Numerically Controlled  
648 Machines", EIA Standard RS-274-D, February 1979



- 649 [S3G] Makerbot Industries, "S3G protocol (formerly RepRap Generation 3  
650 Protocol Specification",  
651 <https://github.com/makerbot/s3g/blob/master/doc/s3gProtocol.md>
- 652 [STD63] F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC  
653 3629/STD 63, November 2003, <http://www.ietf.org/rfc/rfc3629.txt>
- 654 [STLFORMAT] 3D Systems, Inc., "SLC File Specification", 1994
- 655 [UAX9] Unicode Consortium, "Unicode Bidirectional Algorithm", UAX#9, June  
656 2014,  
657 <http://www.unicode.org/reports/tr9/tr9-31.html>
- 658 [UAX14] Unicode Consortium, "Unicode Line Breaking Algorithm", UAX#14,  
659 June 2014,  
660 <http://www.unicode.org/reports/tr14/tr14-33.html>
- 661 [UAX15] Unicode Consortium, "Normalization Forms", UAX#15, June 2014,  
662 <http://www.unicode.org/reports/tr15/tr15-41.html>
- 663 [UAX29] Unicode Consortium, "Unicode Text Segmentation", UAX#29, June  
664 2014,  
665 <http://www.unicode.org/reports/tr29/tr29-25.html>
- 666 [UAX31] Unicode Consortium, "Unicode Identifier and Pattern Syntax",  
667 UAX#31, June 2014,  
668 <http://www.unicode.org/reports/tr31/tr31-21.html>
- 669 [UNICODE] Unicode Consortium, "Unicode Standard", Version 7.0.0, June 2014,  
670 <http://www.unicode.org/versions/Unicode7.0.0/>
- 671 [UNISECFAQ] [Unicode Consortium "Unicode Security FAQ", November 2013,](http://www.unicode.org/faq/security.html)  
672 <http://www.unicode.org/faq/security.html>
- 673 [UTR17] [Unicode Consortium "Unicode Character Encoding Model", UTR#17,](http://www.unicode.org/reports/tr17/tr17-7.html)  
674 [November 2008,](http://www.unicode.org/reports/tr17/tr17-7.html)  
675 <http://www.unicode.org/reports/tr17/tr17-7.html>
- 676 [UTR20] [Unicode Consortium "Unicode in XML and other Markup Languages",](http://www.unicode.org/reports/tr20/tr20-9.html)  
677 [UTR#20, January 2013,](http://www.unicode.org/reports/tr20/tr20-9.html)  
678 <http://www.unicode.org/reports/tr20/tr20-9.html>
- 679 [UTR23] [Unicode Consortium "Unicode Character Property Model", UTR#23,](http://www.unicode.org/reports/tr23/tr23-9.html)  
680 [November 2008,](http://www.unicode.org/reports/tr23/tr23-9.html)  
681 <http://www.unicode.org/reports/tr23/tr23-9.html>

- 682 [\[UTR33\]](#) [Unicode Consortium “Unicode Conformance Model”, UTR#33,](#)  
683 [November 2008,](#)  
684 <http://www.unicode.org/reports/tr33/tr33-5.html>
- 685 [UTS10] Unicode Consortium, “Unicode Collation Algorithm”, UTS#10, June  
686 2014,  
687 <http://www.unicode.org/reports/tr10/tr10-30.html>,
- 688 [UTS35] Unicode Consortium, “Unicode Locale Data Markup Language”,  
689 UTS#35, September 2014,  
690 <http://www.unicode.org/reports/tr35/tr35-37/tr35.html>
- 691 [UTS39] Unicode Consortium, “Unicode Security Mechanisms”, UTS#39,  
692 September 2014,  
693 <http://www.unicode.org/reports/tr39/tr39-9.html>

## 694 **11. Author's Address**

695 Primary author:

696 Michael Sweet  
697 Apple Inc.  
698 1 Infinite Loop  
699 MS 111-HOMC  
700 Cupertino, CA 95014  
701 [msweet@apple.com](mailto:msweet@apple.com)

702 The authors would also like to thank the following individuals for their contributions to this  
703 standard:

704 Olliver Schinagl, Ultimaker B.V.

**705 12. Change History****706 12.1 April 13, 2014**

- 707 1. Updated front matter to incorporate new IEEE-ISTO boilerplate for a contributed  
708 white paper.

**709 12.2 April 5, 2015**

- 710 1. Updated front matter to remove IEEE-ISTO boilerplate.  
711 2. Fixed various typos  
712 3. Clarified that SLC files are commonly known as STL files.  
713 4. Clarified that S3G is a binary version of G-code with a standard packet format.  
714 5. Added use case for printing with loaded materials  
715 6. Added use case for multi-material printing on a single material printer.  
716 7. Added use case for monitoring print progress visually with a web cam.  
717 8. Added exception for "skipping" (insufficient material flow/feed)  
718 9. Added exception for adhesion issues  
719 10. Added exception for build plate being full.  
720 11. Added exception for head movement issues.  
721 12. Added figure showing the typical coordinate system.  
722 13. Expanded Job Template and Printer Description details, added comments for  
723 discussion.  
724 14. Added new Unicode considerations and references.

**725 12.3 January 23, 2015**

726 Initial revision.