



The Printer Working Group

February 22, 2022
Working Draft

IPP Driverless Printing Extensions v2.0 (NODRIVER)

Status: Prototype

Abstract: This specification defines new attributes, values, and operations to support features, capabilities, and status information traditionally associated with model-specific drivers.

This is a PWG Working Draft. For a definition of a "PWG Working Draft", see:

<https://ftp.pwg.org/pub/pwg/general/pwg-process30.pdf>

This specification is available electronically at:

<https://ftp.pwg.org/pub/pwg/ipp/wd/wd-ippnodriver20-20220222.docx>

<https://ftp.pwg.org/pub/pwg/ipp/wd/wd-ippnodriver20-20220222.pdf>

<https://ftp.pwg.org/pub/pwg/ipp/wd/wd-ippnodriver20-20220222-rev.docx>

<https://ftp.pwg.org/pub/pwg/ipp/wd/wd-ippnodriver20-20220222-rev.pdf>

Copyright © 2012-2022 The Printer Working Group. All rights reserved.

This document may be copied and furnished to others, and derivative works that comment on, or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice, this paragraph and the title of the Document as referenced below are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the IEEE-ISTO and the Printer Working Group, a program of the IEEE-ISTO.

Title: *IPP Driverless Printing Extensions v2.0 (NODRIVER)*

The IEEE-ISTO and the Printer Working Group DISCLAIM ANY AND ALL WARRANTIES, WHETHER EXPRESS OR IMPLIED INCLUDING (WITHOUT LIMITATION) ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

The Printer Working Group, a program of the IEEE-ISTO, reserves the right to make changes to the document without further notice. The document may be updated, replaced or made obsolete by other documents at any time.

The IEEE-ISTO takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights.

The IEEE-ISTO invites any interested party to bring to its attention any copyrights, patents, or patent applications, or other proprietary rights which may cover technology that may be required to implement the contents of this document. The IEEE-ISTO and its programs shall not be responsible for identifying patents for which a license may be required by a document and/or IEEE-ISTO Industry Group Standard or for conducting inquiries into the legal validity or scope of those patents that are brought to its attention. Inquiries may be submitted to the IEEE-ISTO by e-mail at: ieee-isto@ieee.org.

The Printer Working Group acknowledges that the IEEE-ISTO (acting itself or through its designees) is and shall at all times be the sole entity that may authorize the use of certification marks, trademarks, or other special designations to indicate compliance with these materials.

Use of this document is wholly voluntary. The existence of this document does not imply that there are no other ways to produce, test, measure, purchase, market, or provide other goods and services related to its scope.

About the IEEE-ISTO

The IEEE-ISTO is a not-for-profit corporation offering industry groups an innovative and flexible operational forum and support services. The IEEE-ISTO provides a forum not only to develop standards, but also to facilitate activities that support the implementation and acceptance of standards in the marketplace. The organization is affiliated with the IEEE (<https://www.ieee.org/>) and the IEEE Standards Association (<https://standards.ieee.org/>).

For additional information regarding the IEEE-ISTO and its industry programs visit:

<https://www.ieee-isto.org/>

About the IEEE-ISTO PWG

The Printer Working Group (or PWG) is a Program of the IEEE Industry Standards and Technology Organization (ISTO) with member organizations including printer manufacturers, print server developers, operating system providers, network operating system providers, network connectivity vendors, and print management application developers. The PWG is chartered to make printers and the applications and operating systems supporting them work together better. All references to the PWG in this document implicitly mean “The Printer Working Group, a Program of the IEEE ISTO.”

To meet this objective, the PWG documents the results of their work as open standards that define print related protocols, interfaces, procedures, and conventions. A PWG standard is a stable, well understood, and technically competent specification that is widely used with multiple independent and interoperable implementations. Printer manufacturers and vendors of printer related software benefit from the interoperability provided by voluntary conformance to these standards.

For additional information regarding the Printer Working Group visit:

<https://www.pwg.org>

Contact information:

The Printer Working Group
c/o The IEEE Industry Standards and Technology Organization
445 Hoes Lane
Piscataway, NJ 08854
USA

Table of Contents

90		
91	1. Introduction.....	10
92	2. Terminology.....	10
93	2.1 Conformance Terminology.....	10
94	2.2 Printing Terminology	10
95	2.3 Protocol Role Terminology.....	11
96	2.4 Other Terminology.....	12
97	2.5 Acronyms and Organizations.....	13
98	3. Requirements	13
99	3.1 Rationale.....	13
100	3.2 Use Cases	14
101	3.2.1 Select Printer Using Geo-Location.....	14
102	3.2.2 Select Printer with Confirmation.....	14
103	3.2.3 List a Printer Once When Discovered Over Multiple Interfaces.....	14
104	3.2.4 Filter Discovered Printers by Capability	14
105	3.2.5 Print Using Loaded Media	14
106	3.2.6 Print a Password-Protected Document.....	15
107	3.2.7 Print from a Roll.....	15
108	3.2.8 Preventing Two-Sided Printing on Transparency Media.....	15
109	3.2.9 Supplies Status.....	15
110	3.2.10 Job or Document Processing Failures.....	15
111	3.2.11 Borderless Printing	16
112	3.2.12 Correlation of Multiple Printers.....	16
113	3.2.13 Printer Resident Icons	16
114	3.2.14 Printer Resident Localization Resources.....	16
115	3.2.15 Manufacturer-Deployed Print Quality Mode.....	16
116	3.2.16 Administrator-Deployed Print Quality Mode.....	17
117	3.2.17 Manufacturer-Deployed Color Transformation Preferences	17
118	3.2.18 Administrator-Deployed Color Transformation Preference	17
119	3.2.19 Settings to Influence Printer Color Processing	18
120	3.2.20 Explicit Preset Selection.....	18
121	3.2.21 Implicit Preset Selection	18
122	3.2.22 Client Storing a Preset to Printer.....	19
123	3.2.23 Audit Print Usage Via Job Accounting	19
124	3.2.24 Audit Print Content Via Job Accounting.....	19
125	3.2.25 Billing Via Job Accounting	19
126	3.2.26 Diagnosing and Debugging Printing Issues Via Job Accounting	19
127	3.2.27 Supplying Optional Information Via Job Accounting	19
128	3.3 Exceptions	20
129	3.3.1 Job or Document Processing Failures.....	20
130	3.4 Out of Scope.....	20
131	3.5 Design Requirements.....	20
132	4. IPP Model	21
133	4.1 Limits.....	23
134	4.2 Filtering	23
135	4.3 Constraints.....	24

136	4.4 Printer Resources.....	24
137	4.5 ICC Color Management and Color Mode Previews	24
138	4.6 Localization.....	25
139	4.7 Unique Identifiers.....	25
140	4.8 Presets and Triggers	25
141	4.9 Print Quality	26
142	4.10 Client Metadata for Job Accounting.....	26
143	5. New Operations.....	26
144	5.1 Identify-Printer	26
145	5.1.1 Identify-Printer Request.....	26
146	5.1.2 Identify-Printer Response.....	27
147	5.2 Validate-Document.....	27
148	5.2.1 Validate-Document Request	28
149	5.2.2 Validate-Document Response	29
150	6. New Attributes	29
151	6.1 Operation Attributes	29
152	6.1.1 client-info (1setOf collection).....	30
153	6.1.2 document-metadata (1setOf octetString(MAX))	30
154	6.1.3 document-password (octetString(1023))	31
155	6.1.4 first-index (integer(1:MAX))	32
156	6.1.5 identify-actions (1setOf type2 keyword).....	32
157	6.1.6 preferred-attributes (collection)	32
158	6.1.7 requesting-user-uri (uri).....	32
159	6.2 Job and Document Template Attributes	33
160	6.2.1 job-error-action (type2 keyword)	33
161	6.2.2 media-overprint(collection)	33
162	6.2.3 print-color-mode (type2 keyword)	35
163	6.2.4 print-rendering-intent (type2 keyword).....	36
164	6.2.5 print-scaling (type2 keyword)	36
165	6.3 Document Status Attributes	39
166	6.3.1 document-metadata (1setOf octetString(MAX))	39
167	6.3.2 document-uuid (uri(45)).....	39
168	6.3.3 pages (integer(0:MAX))	39
169	6.3.4 pages-completed (integer(0:MAX)).....	39
170	6.4 Job Status Attributes	40
171	6.4.1 client-info (1setOf collection).....	40
172	6.4.2 document-metadata (1setOf octetString(MAX))	40
173	6.4.3 job-originating-user-uri (uri).....	40
174	6.4.4 job-pages (integer(0:MAX))	40
175	6.4.5 job-pages-completed (integer(0:MAX)).....	40
176	6.4.6 job-uuid (uri(45))	41
177	6.5 Printer Description Attributes	41
178	6.5.1 client-info-supported (1setOf type2 keyword).....	42
179	6.5.2 document-password-supported (integer(0:1023))	42
180	6.5.3 identify-actions-default (1setOf type2 keyword)	42
181	6.5.4 identify-actions-supported (1setOf type2 keyword).....	42

182	6.5.5 ipp-features-supported (1setOf type2 keyword)	43
183	6.5.6 job-constraints-supported (1setOf collection)	43
184	6.5.7 job-error-action-default (type2 keyword)	44
185	6.5.8 job-error-action-supported (1setOf type2 keyword).....	44
186	6.5.9 job-presets-supported (1setOf collection)	44
187	6.5.10 job-resolvers-supported (1setOf collection)	46
188	6.5.11 job-triggers-supported (1setOf collection).....	46
189	6.5.12 jpeg-features-supported (1setOf type2 keyword)	47
190	6.5.13 jpeg-k-octets-supported (rangeOfInteger(0:MAX))	48
191	6.5.14 jpeg-x-dimension-supported (rangeOfInteger(0:65535)).....	48
192	6.5.15 jpeg-y-dimension-supported (rangeOfInteger(1:65535)).....	48
193	6.5.16 media-overprint-distance-supported (1setOf integer(0:MAX))	48
194	6.5.17 media-overprint-method-supported (1setOf type2 keyword)	48
195	6.5.18 multiple-operation-time-out-action (type2 keyword)	49
196	6.5.19 pdf-k-octets-supported (rangeOfInteger(0:MAX)).....	49
197	6.5.20 pdf-versions-supported (1setOf type2 keyword).....	49
198	6.5.21 preferred-attributes-supported (boolean).....	51
199	6.5.22 print-color-mode-default (type2 keyword)	51
200	6.5.23 print-color-mode-supported (1setOf type2 keyword).....	51
201	6.5.24 print-color-mode-icc-profiles (1setOf collection)	52
202	6.5.25 print-processing-attributes-supported (1setOf keyword)	52
203	6.5.26 print-rendering-intent-default (type2 keyword).....	53
204	6.5.27 print-rendering-intent-supported (1setOf type2 keyword)	53
205	6.5.28 print-scaling-default (type2 keyword)	53
206	6.5.29 print-scaling-supported (1setOf type2 keyword).....	53
207	6.5.30 printer-dns-sd-name (name(63))	53
208	6.5.31 printer-geo-location (uri unknown)	53
209	6.5.32 printer-get-attributes-supported (1setOf keyword)	54
210	6.5.33 printer-icc-profiles (1setOf collection)	54
211	6.5.34 printer-icons (1setOf uri).....	54
212	6.5.35 printer-input-tray (1setOf octetString(MAX))	55
213	6.5.36 printer-kind (1setOf type2 keyword name(MAX))	58
214	6.5.37 printer-mandatory-job-attributes (1setOf keyword).....	58
215	6.5.38 printer-organization (text(MAX)).....	59
216	6.5.39 printer-organizational-unit (text(MAX)).....	59
217	6.5.40 printer-output-tray (1setOf octetString(MAX)).....	59
218	6.5.41 printer-strings-languages-supported (1setOf naturalLanguage)	62
219	6.5.42 printer-strings-uri (uri no-value)	62
220	6.5.43 requesting-user-uri-supported (boolean)	62
221	6.5.44 requesting-user-uri-schemes-supported (1setOf uriScheme).....	62
222	6.6 Printer Status Attributes	63
223	6.6.1 device-service-count (integer(1:MAX))	63
224	6.6.2 device-uuid (uri(45))	63
225	6.6.3 printer-config-change-date-time (dateTime 'unknown')	63
226	6.6.4 printer-config-change-time (integer(1:MAX))	64
227	6.6.5 printer-firmware-name (1setOf name(MAX))	64

228	6.6.6 printer-firmware-patches (1setOf text(MAX)).....	64
229	6.6.7 printer-firmware-string-version (1setOf text(MAX))	64
230	6.6.8 printer-firmware-version (1setOf octetString(MAX))	64
231	6.6.9 printer-supply (1setOf octetString(MAX)).....	65
232	6.6.10 printer-supply-description (1setOf textWithLanguage(MAX))	69
233	6.6.11 printer-supply-info-uri (uri)	69
234	6.6.12 printer-uuid (uri(45)).....	70
235	6.7 Subscription Status Attributes	70
236	6.7.1 notify-subscription-uuid (uri(45))	70
237	6.7.2 notify-subscriber-user-uri (uri)	70
238	7. Obsolete Attributes, Operations, and Values	71
239	7.1 Obsolete Attributes	71
240	7.2 Obsolete Values	71
241	8. Additional Semantics for Existing Operations	71
242	8.1 All Operations: "requesting-user-uri"	71
243	8.2 All Operations: "client-info"	72
244	8.3 Get-Printer-Attributes Operation: "first-index" and "limit"	72
245	8.4 Get-Subscriptions Operation: "first-index" and "limit"	72
246	8.5 Get-Jobs Operation: "first-index" and "limit"	72
247	8.6 Get-Documents Operation: "first-index" and "limit"	72
248	8.7 Print-Job, Print-URI, Send-Document, and Send-URI Operations: "document-	
249	metadata"	72
250	8.8 Print-Job, Print-URI, Send-Document, and Send-URI Operations: "document-	
251	password"	73
252	8.9 Validate-Job Operation: "document-password"	73
253	8.10 Validate-Job Operation: "preferred-attributes"	73
254	8.11 Validate-Job Operation: "profile-uri-actual"	74
255	9. Additional Values and Semantics for Existing Attributes	74
256	9.1 document-state-reasons (1setOf type2 keyword) and job-state-reasons (1setOf	
257	type2 keyword)	74
258	9.2 media-source (type2 keyword name(MAX))	75
259	9.3 orientation-requested (type2 enum).....	75
260	9.4 print-content-optimize (type2 keyword).....	75
261	9.5 printer-state-reasons (1setOf type2 keyword)	75
262	9.6 uri-authentication-supported (1setOf type2 keyword)	76
263	10. Status Codes.....	76
264	10.1 client-error-document-password-error (0x418).....	76
265	10.2 client-error-document-permission-error (0x419).....	76
266	10.3 client-error-document-security-error (0x41A)	76
267	10.4 client-error-document-unprintable-error (0x41B).....	76
268	11. Localization Resources.....	76
269	11.1 Message Catalog File Format.....	76
270	11.2 Message Catalog Help Resources	77
271	11.3 Message Catalog Example	78
272	11.4 Message Catalog ABNF.....	79
273	12. Implementation Guidance	80

274	12.1 Presets and Triggers	80
275	12.1.1 Storing Presets and Triggers	80
276	12.1.2 Presets User Experience Recommendations	80
277	12.1.3 Triggers User Experience Recommendations	81
278	12.2 Printer Resources	81
279	13. Conformance Requirements	82
280	13.1 Printer Conformance Requirements	82
281	13.2 Client Conformance Requirements	82
282	14. Internationalization Considerations	83
283	15. Security Considerations	84
284	16. IANA Considerations	84
285	16.1 MIME Media Type Registration	84
286	16.2 Attribute Registrations	85
287	16.3 Type2 keyword Registrations	88
288	16.4 Type2 enum Registrations	90
289	16.5 Operation Registrations	90
290	16.6 Status Code Registrations	91
291	17. Overview of Changes	91
292	17.1 IPP Driverless Printing Extensions v.2.0	91
293	18. References	92
294	18.1 Normative References	92
295	18.2 Informative References	96
296	19. Authors' Addresses	99
297	20. Change History	100
298	20.1 February 22, 2022	100
299	20.2 February 7, 2022	101
300	20.3 November 2, 2021	101
301	20.4 May 1, 2021	101
302	20.5 October 29, 2020	102
303	20.6 October 27, 2020	102
304	20.7 February 4, 2020	104
305	20.8 November 21, 2019	104
306	20.9 November 20, 2019	104
307	20.10 October 3, 2019	105
308	20.11 July 24, 2019	105
309	20.12 July 10, 2019	108

List of Figures

313	Figure 1 - ABNF for "document-metadata" Values	30
314	Figure 2 - Extending the marked area with "media-overprint"	35
315	Figure 3 - Extending the marked area with "media-overprint"	35
316	Figure 4 - "print-scaling" Values	39
317	Figure 5 - Verbose "job-constraints-supported" and "job-resolvers-supported" Example ..	43
318	Figure 6 - Concise "job-constraints-supported" and "job-resolvers-supported" Example...	44
319	Figure 7 - ABNF for "printer-input-tray" Values	55

320	Figure 8 - Example values for "printer-input-tray"	57
321	Figure 9 - ABNF for "printer-output-tray" Values	60
322	Figure 10 - Example values for "printer-output-tray"	61
323	Figure 11 - ABNF for "printer-supply" Values	65
324	Figure 12 - Example values for "printer-supply"	68
325	Figure 13 - Example values for "printer-supply-description"	69
326	Figure 14 - ABNF for the "text/strings" MIME Media Type	79

327

328

329

List of Tables

330	Table 1 - Design Requirements, Use Cases and Definitions Cross Reference	21
331	Table 2 - New Operation Attributes	29
332	Table 3 - "identify-actions" Keyword Values	32
333	Table 4 - New Job and Document Template Attributes	33
334	Table 5 - "job-error-action" Keyword Values	33
335	Table 6 - "media-overprint-type" Keyword Values	34
336	Table 7 - "print-color-mode" Keyword Values	35
337	Table 8 - "print-rendering-intent" Keyword Values	36
338	Table 9 - "print-scaling" Keyword Values	36
339	Table 10 - New Document Status Attributes	39
340	Table 11 - New Job Status Attributes	40
341	Table 12 - New Printer Description Attributes	41
342	Table 13 - "ipp-features-supported" Keyword Values	43
343	Table 14 - "preset-category" Keywords	45
344	Table 15 - "jpeg-features-supported" Keywords	47
345	Table 16 - "multiple-document-time-out-action" Keyword Values	49
346	Table 17 - "pdf-versions-supported" Keywords	49
347	Table 18 - "printer-input-tray" Keys	55
348	Table 19 - "printer-kind" Keyword Values	58
349	Table 20 - "printer-output-tray" Keys	59
350	Table 21 - New Printer Status Attributes	63
351	Table 22 - "printer-supply" Keys	65
352	Table 23 - "printer-supply" Standard Colorant Names	67
353	Table 24 - New Job Status Attributes	70
354	Table 25 - Obsolete Attributes	71
355	Table 26 - Obsolete Values	71
356	Table 27 - New "document-state-reasons" and "job-state-reasons" Keyword Values	74
357	Table 28 - New "printer-state-reasons" Keyword Values	75

358

359

1. Introduction

This IPP Driverless Printing Extensions v2.0 specification defines new attributes, values, and operations to support features, capabilities, and status information traditionally associated with model-specific drivers.

Drivers implemented to support specific printer models usually include code tailored to those models' unique behavior, including color tuning, model-unique feature variants, and other specializations. These driver packages also include resources such as icon images, localized text, supported media lists, and support content ("help") targeting a specific printer model or models. Universal client drivers and their related Client printing solutions running have none of these model-specific enhancements. To approach feature parity, they instead depend on the Printer itself to supply its own model-specific information and resources to support a modern full-featured printing experience. While IPP/1.1, IPP/2.0 and other IPP specifications provide much of what is needed, some facilities were missing.

This specification defines new IPP attributes, attribute values and operations to support media selection, color management, color transformations, printer identification and location, presets, custom print quality settings, supplies status, formatting choices, printer icons, and a message catalog file format for supplying sets of localized string labels. This specification also defines a general method for expressing limits in IPP operation requests and a more extensible method for filtering objects and attributes.

This specification updates the previous version of this specification [PWG5100.13-2012]. Section 17 provides a list of changes made since the first version.

2. Terminology

2.1 Conformance Terminology

Capitalized terms, such as MUST, MUST NOT, RECOMMENDED, REQUIRED, SHOULD, SHOULD NOT, MAY, and OPTIONAL, have special meaning relating to conformance as defined in Key words for use in RFCs to Indicate Requirement Levels [BCP14]. The term CONDITIONALLY REQUIRED is additionally defined for a conformance requirement that applies when a specified condition is true.

The term DEPRECATED is used for previously defined and approved protocol elements that SHOULD NOT be used or implemented. The term OBSOLETE is used for previously defined and approved protocol elements that MUST NOT be used or implemented.

2.2 Printing Terminology

Normative definitions and semantics of printing terms are imported from the Internet Printing Protocol/1.1 [STD92].

394 *Console*: The physical control interface used to display the state of the Printer and change
395 its settings. This may also refer to a network management service or protocol e.g. SNMPv3,
396 HTTPS/HTML, SSH, etc.

397 *Document*: An object created and managed by a Printer that contains the description,
398 processing, and status information. A Document object may have attached data and is
399 bound to a single Job. [STD92]

400 *Impression*: The Document Content imposed upon one side of a Media Sheet by a marking
401 engine, independent of the number of times that the sheet side passes any marker. An
402 Impression contains one or more Input Pages that are imposed (scaled, translated, and/or
403 rotated) during processing of the Document data. [STD92]

404 *Input Page*: A page according to the definition of "pages" in the language used to express
405 the Document data [STD92].

406 *Job*: An object created and managed by a Printer that contains description, processing, and
407 status information. The Job also contains zero or more Document objects. [STD92]

408 *Logical Device*: a print server, software service, or gateway that processes jobs and either
409 forwards or stores the processed Job or uses one or more Physical Devices to render output.
410 [STD92]

411 *Media Sheet*: A single instance of a medium, whether printing on one or both sides of the
412 medium. Media Sheets also include sections of roll media. [STD92]

413 *Physical Device*: a hardware implementation of a endpoint device, e.g., a marking engine, a
414 fax modem, etc. [STD92]

415 *Set*: A logical boundary between the delivered Media Sheets of a printed Job [STD92]. For
416 example, in the case of a ten-page single Document with collated pages and a request for
417 50 copies, each of the 50 printed copies of the Document constitutes a Set. If the pages
418 were uncollated, then 50 copies of each of the individual pages within the Document would
419 represent each Set. Finishing processes operate on Sets. [STD92]

420 **2.3 Protocol Role Terminology**

421 The following protocol roles are defined to specify unambiguous conformance requirements:

422 *Client*: Initiator of outgoing connections and sender of outgoing operation requests
423 (Hypertext Transfer Protocol -- HTTP/1.1 [RFC7230] User Agent).

424 *Printer*: Listener for incoming connections and receiver of incoming operation requests
425 (Hypertext Transfer Protocol -- HTTP/1.1 [RFC7230] Server) that represents one or more
426 Physical Devices or a Logical Device.

2.4 Other Terminology

Black Point Compensation: The mapping of the darkest color in a source Color Space to the darkest color in a destination Color Space, generally to improve the reproduction of dark colors and shadows.

Color Space: The interpretation of color in a Document, for example “RGB”, “Grayscale”, “CMYK”, and so forth.

End User: A person or software process that is authorized to perform basic printing functions, including finding/locating a Printer, creating a local instance of a Printer, viewing Printer status, viewing Printer capabilities, submitting a Print Job, viewing Print Job status, and altering the attributes of a Print Job. [STD92]

Gamut: The range of colors that can be reproduced by a Printer or Color Space.

ith: Referring to a specific 1setOf value - the first value, the second value, and so forth.

Job Creation Operation: any operation that causes the creation of a Job object, e.g., the Create-Job, Print-Job, and Print-URI operations defined in this document. [STD92]

Job Ticket: The operation and Job Template attributes supplied by a Client in a Job Creation Operation request that describe the End User's intent for Job and Document processing as well as descriptive information about the Job and its Document(s).

Kerberized Printing: Authenticated printing based on SPNEGO-based Kerberos and NTLM HTTP Authentication in Microsoft Windows [RFC4559], Transport Layer Security/1.3 [RFC8446], and Upgrading to TLS Within HTTP/1.1 [RFC2817].

Paid Imaging Services: Printing, facsimile, and scanning performed for a fee. The means of collecting payment is outside the scope of this specification.

Preset: A set of Job Template and operation attributes and values that are logically congruent and grouped together to all be applied to the Job Ticket in one step.

Printer Event: An Event caused by some change in the Printer that is not specific to a Job, e.g., 'printer-state-changed'. [RFC3995]

Printer Resident: Hosted by the Printer. Usually used in discussing Printer resources. If a Printer at `ipps://myprinter.local.:631/ipp/print` supports a "printer-xxx-resource (URI)" attribute, if the resource is Printer Resident, then it could provide that resource at `"https://myprinter.local.:631/xxx-resource"`.

Secure Transport: Encryption of the IPP connection at the HTTP layer using Transport Layer Security [RFC8446] as per [RFC7472].

Site Local: Hosted nearby relative to another host on a computer network, requiring a small number of hops between two hosts, and not leaving a particular site.

Trigger: A condition that causes a Client to silently apply a Preset on behalf of an End User.

2.5 Acronyms and Organizations

IANA: Internet Assigned Numbers Authority, <https://www.iana.org/>

ICC: International Color Consortium, <https://www.color.org>

IETF: Internet Engineering Task Force, <https://www.ietf.org/>

ISO: International Organization for Standardization, <https://www.iso.org/>

PWG: Printer Working Group, <https://www.pwg.org/>

3. Requirements

3.1 Rationale

The Internet Printing Protocol Version 2.0 Second Edition [PWG5100.12] defines:

1. A collection of existing IPP specifications that form the basis for IPP/2.0;
2. Standard Job Template attributes for document format, media size, print quality, and so forth;
3. Specific interoperability requirements, such as HTTP/1.1 support with chunking and IPP collection attribute support;
4. Unique version numbers and operation requirements for different classes of device.

Printing from universal IPP Clients with a sophistication that matches vendor-provided model-specific drivers requires supporting use cases not addressed by existing IPP standards. Therefore, this IPP Driverless Printing Extensions v2.0 specification defines IPP extensions to support:

1. Printer identification and geolocation;
2. Globally unique identifiers for all objects;
3. Job Template attribute and value constraint description and conflict resolution;
4. Extensible controls for the color rendition of a Document and for Client-managed color workflows;
5. Supply monitoring and control;
6. Roll feed media;
7. Printer Resident message catalog resources for providing localized labels for attribute names, enum values, and keyword values;
8. Printer Resident icon image resources;
9. Printer supplied "Presets" to logically bundle some feature choices together.

3.2 Use Cases

The IPP extensions defined in this IPP Driverless Printing Extensions v2.0 specification support the following use cases.

3.2.1 Select Printer Using Geo-Location

Jan is a student who is looking at photos on her laptop in an unfamiliar studying location. She chooses to print one of the photos. The Client discovers Printers on her network. The Client requests geolocation information for each discovered Printer. The Client uses its own location service facilities and the Printer discovery results to list the printers in order of proximity rather than alphabetic order. Jan selects the closest printer.

3.2.2 Select Printer with Confirmation

After selecting a Printer, Jan uses the Client to send an identification request to the Printer to flash a light or make a sound to confirm she selected the correct printer. Jan hears a repeating sound begin, helping her to locate the Printer she selected.

3.2.3 List a Printer Once When Discovered Over Multiple Interfaces

Gus is viewing a document on his tablet computer and taps the "Print" button. His tablet computer is on his company's LAN, and it also supports peer-to-peer wireless networking. The client software in the tablet uses discovery protocols on both the LAN and peer-to-peer interfaces to discover available printers. The client software collects results and detects that one printer was discovered over both interfaces. The client presents only one item in the discovery results list to provide a less confusing user experience. Gus selects the printer, and the tablet computer's client software uses heuristics to connect to the printer as quickly as possible.

3.2.4 Filter Discovered Printers by Capability

Gus is viewing a tax return on his tablet computer and wants to print it on printers that support Job Release [PWG5100.11]. When taps the "Print" button and his tablet computer discovers available printers, he uses controls in the discovery UI to filter the results to list only those printers that support the Job Release feature. The filtered results list a nearby printer. Gus chooses that printer, enables the Job Release feature, and sends the Job. Gus then goes to the chosen printer to release the Job so that he is present while it prints.

3.2.5 Print Using Loaded Media

Greta is viewing a photo on her phone and wants to print the photo on the largest borderless photographic media loaded on her printer. After Greta chooses to print and selects a printer, the client software queries the printer to report loaded media information such as media size, media type, coating, media weight, and input tray location. The client software pre-selects the largest borderless photographic media currently loaded in the printer and the highest print quality based on the type of job and media selection. Greta checked the settings, chose

529 to enable a few other settings, and taps "Print" to create the job. The client software creates
530 the job and sends it to the Printer. Greta is impressed with the output and how easy it was
531 to print a photo from her phone.

532 **3.2.6 Print a Password-Protected Document**

533 Tim is the treasurer of a small training company, and he has received a PDF document of a
534 bank statement. The PDF document is password protected. He tries to print the PDF
535 document, and the Client asks for the PDF's password before it can send the PDF as the
536 Document Content for the Job. It creates the Job using Secure Transport and includes the
537 document password in the Job Ticket. The Printer unlocks the PDF and prints the report.

538 **3.2.7 Print from a Roll**

539 Mike has a series of photos to print and a printer that has a roll of photo media instead of
540 cut sheets of photo media. Mike creates and submits a print job with 20 photos to be printed
541 on A6 media and requests that each photo in the job is to be cut from the roll media.

542 **3.2.8 Preventing Two-Sided Printing on Transparency Media**

543 Sven is a graduate student for an elderly, technology-averse professor who still uses an
544 overhead projector and transparency media. He receives the set of slides from the professor
545 via email with instructions to print one copy on transparency and 30 copies on plain paper
546 as handouts. Sven starts by printing the 30 copies on plain paper, choosing to use two-sided
547 printing to save paper. He then starts to set up the print job for the transparency slides. When
548 Sven chooses "Transparency" media in the print dialog, his laptop presents a dialog
549 informing him that this media type is not compatible with two-sided printing and provides a
550 resolution to disable two-sided printing. Sven approves the resolution and submits the Job
551 to the Printer. Both the plain paper handouts and the slides on transparency are printed as
552 he was expecting them to be.

553 **3.2.9 Supplies Status**

554 Barbie is preparing to print a set of photos on her inkjet printer from her laptop. Software on
555 the laptop presents a notification indicating that her cyan ink cartridge is critically low. She
556 clicks on the notification to get to the printer driver's supplies status UI and sees that her
557 magenta and black levels are also low. She clicks on a reorder link in the UI taken from the
558 Printer, which takes her to a web page in her browser. She orders supplies.

559 **3.2.10 Job or Document Processing Failures**

560 Wawira submitted a job from her laptop to the workgroup printer near her cubicle. While
561 processing the job, the printer encounters a document processing issue. The printer updates
562 the job's processing status with messages describing the problem and possible resolutions.
563 Wawira's laptop is monitoring the job's processing status and presents a notification dialog
564 on the screen that presents the error description from the printer and a button to present
565 more information.

3.2.11 Borderless Printing

Rick operates a print shop that has a number of expensive wide format printers. Paula is a customer that wants a photo poster printed using the full width of the 36" paper loaded, but with no white margins showing on the sides. Rick opens the photo in his system, chooses the photo media Paula prefers, and chooses job settings to enable overprinting at the edges to ensure there are no white areas.

3.2.12 Correlation of Multiple Printers

Felipe is an IT administrator who monitors and maintains multiple printers managed by several print servers. He runs management software that correlates printers registered with a directory service or dynamic discovery protocol to provide a hierarchical display of the available servers, printers, jobs, and current state.

3.2.13 Printer Resident Icons

Ava is at work and has a photo on her phone she wants to print. Her phone's print system searches for available printers using a discovery protocol and presents the results in a grid of icons with names below each icon. For some discovered printers that provide their own icons, it shows an icon that looks like the printer. For those printers that don't have a Printer Resident icon, Ava's phone just shows a generic icon. She doesn't know the name of the printer but recognizes the printer by its icon image and selects it.

3.2.14 Printer Resident Localization Resources

Ava is at work and has a photo on her phone she wants to print. She chooses a printer that has photo paper loaded. After a few seconds, the phone presents the selected printer's capabilities. She picks the photo media which has a vendor-specific brand name. She wants more information, so she taps on a "?" button and the media selection control, and some additional text describing the media is shown to her.

3.2.15 Manufacturer-Deployed Print Quality Mode

X Printers, a printer manufacturer, has developed printers with a unique print quality capability called "X Magic" that provides significant customer benefit compared to the standard print quality modes. The "X Magic" print quality mode depends on the printer having specific print engine mechanism that implements the requisite imaging technology. X Printers does not want to map an existing print quality mode to "X Magic" for those devices that support the technology, since that would cause inconsistent behavior and doing so would also prevent the "X Magic" feature from being clearly visible to its customers. X Printers includes localized labels and localized contextual help in the printers that support its "X Magic" feature.

Nozomi is an end user that buys an X Printers printer with the "X Magic" feature. When she taps on "Print", and looks at the print options, she sees "X Magic" available as a print quality option. She hovers her finger over the label, and a contextual help frame appears above that

describes the feature. She chooses "X Magic" because its description seems compelling to her, and taps "Print". The printer prints her document using the "X Magic" print quality setting.

3.2.16 Administrator-Deployed Print Quality Mode

A customer has agreed with its print service provider to pay for a unique print quality mode called "Eco-Draft", that is enabled through the service contract. This print quality mode will only be made available on select printers, facilitated by the print service provider's IT administration and deployment system.

This "Eco-Draft" print mode differs from the standard "Draft", "Normal" and "High" modes in that, when selected and indicated to the Printer, the Printer employs a unique combination of rendering selections to produce output generally comparable to "Draft" but with a significantly reduced ink or toner usage, and a corresponding reduction in per-page cost. "Eco-Draft" is offered as a new print quality setting unique to this deployment to preserve the conventional definition and user understanding of "Draft". A discernably unique quality value is important not only so that end users know they are using a different print quality, but also for job accounting reasons so that the billing system can bill pages using this quality level differently than the other familiar quality levels.

The IT administrators have a print policy defined so that users from different departments or role families have access to different print capabilities. Those in the Finance department will only be offered the "Eco-Draft" print quality option, while executives and those in the Marketing department will be offered "Eco-Draft" in addition to the standard "Draft", "Normal" and "High" options. The different quality levels factor into the billing cost the IT administrators and their print service providers have negotiated.

3.2.17 Manufacturer-Deployed Color Transformation Preferences

X Printers, a printer manufacturer, has produced printers for many years. Its customers have asked X Printers to provide a "color output mode" control with a "legacy color compatibility mode" choice. X Printers implements this feature in its newer printers that have more accurate color output, to cause them to produce output that appears as though it was printed on an older printer whose output exhibited a different particular set of color output characteristics. The customers want to be able to select this "color output preference" on a per-job and/or per-Client basis, because some users have a need for this, but only in certain applications, while others do not.

The customers have also asked for a "print preview" to show them what the color would look like before printing. The printers that implement this new "legacy color compatibility mode" also supply a special "soft proofing" ICC profile so that the client can present this accurately to the user.

3.2.18 Administrator-Deployed Color Transformation Preference

Fred is a print administrator at an architecture firm. He has been tasked with finding a way to supply a "blueprint output mode" to the architects in the office, that can be selected as an

option in the print dialog. When this option is selected, the submitted job will be output as though it was printed from a blueprinting machine. To produce this, the document color depth is flattened to a 1-bit monochrome, and then transformed so that the white background is rendered in Prussian blue (Web color #003153 or sRGB 0,49,83), and the "black" lines are rendered in white. Fred provisions the printer with settings and resources to describe the desired color transformation to its users' systems using an administrative interface to add this feature.

Lisa works in the office, and her laptop discovers this "Blueprint" color transformation option when it interrogates the printer for its capabilities. Her client device presents the "Blueprint" color transformation option in the print dialog. Lisa positions her mouse pointer over the option and sees a "tool tip" (snippet of descriptive text) over the "Blueprint" option, that describes what that will do. Lisa likes what the tool tip describes for the "Blueprint" option and selects it. The print preview in the print dialog shows her what the output will look like. She likes it more, so she clicks "Print", and the job is printed as per the preview. Lisa is happy, and thanks Fred.

3.2.19 Settings to Influence Printer Color Processing

Juan is a graphic artist, and his team has a high-performance color printer. It has produced high quality output for all of the applications from which he and his team are printing. But then Juan encounters a problem. He is viewing a document in a particular application, prints the document, and realizes that the output is not meeting his needs. He is unable to find settings in the application that will allow it to produce satisfactory printed output without either changing the document in unacceptable ways or affecting other users of the printer. He looks in the print dialog and finds a set of "advanced processing settings", and through his experience and some educated experimentation figures out how to produce output that meets his customers' needs.

Knowing he will need these settings in the future, and knowing that his computer supports IPP Presets, he saves these settings as a Preset for future quick access.

3.2.20 Explicit Preset Selection

Bert has found a good recipe for gazpacho on the Web and wants to print the recipe to put it into his recipe binder. He clicks on the "Print" button in the web page. When the browser presents its print dialog, he selects the Preset labeled "Recipe for binder". The "Recipe for binder" Preset specifies "2 pages per sheet" page layout, one-sided printing, trimming and punching. The Client applies the Preset to the settings in the print dialog. Bert clicks on "Print"; the Client prints the Job. Bert puts it into his recipe binder.

3.2.21 Implicit Preset Selection

Kelli is trying to print a photo. In the print dialog, she switches the selected media size from A4 to 4"x6". Her Client has a Trigger for 4"x6" media size that names a Preset named "Photos"; the "Photos" Preset includes glossy photo media type, single-sided printing, and 'high' print quality. The Client acts on the Trigger by applying the settings in the "Photos"

680 Preset. Kelli is pleased that these choices were made automatically by her system, saving
681 her time and effort.

682 **3.2.22 Client Storing a Preset to Printer**

683 Ernie has constructed his own Preset named “Better Binder Recipe”, and he would like to
684 share it with Bert. Ernie selects that Preset and taps on the “Store Preset on Printer” button.
685 The Preset is uploaded to the Printer. When Bert next goes to print, he sees the “Better
686 Binder Recipe” Preset that Ernie added to the Printer and uses that for his next recipe
687 printing tasks.

688 **3.2.23 Audit Print Usage Via Job Accounting**

689 Jane manages a shared office multifunction device and wants to know who prints, what kinds
690 of Jobs are printed, how those Jobs are submitted, and where are they printed. She
691 configures a Job Accounting service on her network for use with the Printer so that all Job
692 and Printer Generated Metadata is available to the service and she can then generate
693 reports showing the information she is interested in.

694 **3.2.24 Audit Print Content Via Job Accounting**

695 Bob is concerned that the students in his computer lab are printing inappropriate content on
696 the school's color printer. He configures a server on his network to act as a print server that
697 stores copies of every Job so that he can periodically review what is being printed.

698 **3.2.25 Billing Via Job Accounting**

699 Kate is the owner of a managed print service company that supplies printers and print
700 servers to businesses. She collects information about each Job that is printed including
701 whether the Job is printed in color, how many sheets are printed, how many sides are
702 printed, and what finishing options (if any) are used. She uses the collected information to
703 bill each business for their usage and to plan customer visits to perform maintenance or
704 supply additional media, ink, and/or toner based on their usage.

705 **3.2.26 Diagnosing and Debugging Printing Issues Via Job Accounting**

706 Joe is a support technician at Kate's managed print service company. He uses the
707 accounting data to reproduce problems specific to a particular Document, Job, or Client
708 application.

709 **3.2.27 Supplying Optional Information Via Job Accounting**

710 Some of Kate's customers want to know what applications their End Users are printing from.
711 Kate configures the printer server to request the application name from the Client with every
712 Job, and then includes a separate informational report to her customers showing the amount
713 of printing that has occurred for each application. Clients will then show the explicit consent
714 UI whenever an End User submits a print Job.

3.3 Exceptions

The following subsections define exceptions in addition to those defined in the Internet Printing Protocol/1.1 [STD92].

3.3.1 Job or Document Processing Failures

While processing a job, the Printer reports Job or Document processing issues to the Client, which displays an error message as needed and asks the User or Operator to confirm the disposition of the Job. Processing failures include out-of-memory, missing resource, missing or incorrect password, and other conditions that prevent a particular Job or Document from printing.

3.4 Out of Scope

The following are out of scope for this specification:

1. Methods for geo-location and proximity detection for the Select Printer Using Geo-Location use case (section 3.2.1);
2. Constraining choice of document formats suitable for the Print use cases; and
3. Discovery protocols used to locate Printers.

3.5 Design Requirements

The design requirements for this specification are:

1. Support the use cases listed in section 3.2 by defining the following IPP extensions:
 - a. A facility that allows a Client to correlate multiple Printers to a single device or server supporting the Printers;
 - b. An operation and associated attributes to request that the Printer identify itself using visual or audio ;
 - c. Printer precise geo-location and relative location;
 - d. Printer discovery and selection metadata;
 - e. Client-side Job Template attribute constraints and conflict resolution;
 - f. Secure printing, identification, and metadata attributes and values;
 - g. Media capability attributes;
 - h. Input and output tray description;
 - i. Limit and filtering attributes;

- j. Color printing attributes;
- k. ICC color management attributes;
- l. Roll-fed printing attributes and values;
- m. Supply level and status monitoring;
- n. Localization attributes and a message catalog file format;
- o. Attributes providing globally unique identifier attributes for all objects; and
- p. Preset attributes.

2. Ensure that all IPP extensions follow the naming conventions defined in the IPP/1.1 Model and Semantics [STD92], including keyword value (lowercase) and hyphenation requirements; and
3. Ensure that all IPP extensions are compatible with, but not redundant with, existing IETF and PWG IPP operations and attributes.

The design recommendations for this specification are:

1. Prefer Printer Resident resources to better support this specification's use cases in scenarios where Internet access is unavailable, such as isolated or restricted networks or peer-to-peer networking technologies.

4. IPP Model

This specification extends the core features defined in the IPP/1.1 Model and Semantics [STD92] and other IPP specifications in several significant ways. Descriptions of each IPP extension are below.

REMOVE THE BELOW TABLE BEFORE FINAL PUBLICATION

Table 1 - Design Requirements, Use Cases and Definitions Cross Reference

Design Requirement	Use Case(s)	Definitions
4. Define new Printer identification attributes and an identification operation	3.2.2, 3.2.3	5.1, 6.1.5, 6.6.12
5. Define new geo-location attributes	3.2.1	6.5.28
6. Define new Printer discovery and selection attributes	3.2.4	6.5.5, 6.5.32,

7. Define new attributes to support feature selection constraints and conflict resolution	3.2.8	6.5.6, 6.5.10
8. Define new secure printing, identification, and metadata attributes and values	3.2.6	6.3.2, 6.4.6, 8.8
9. Define new media capability attributes	3.2.7	Error! Reference source not found., 9.2
10. Define new input and output tray attributes	Error! Reference source not found., Error! Reference source not found.	6.5.35, 6.5.40
11. Define new limit and filtering attributes	Error! Reference source not found., 3.2.4	6.1.4,
13. Define new color printing and print quality attributes	3.2.15, 3.2.19	3.2.16, 0, 6.2.4, Error! Reference source not found., 9.4, Error! Reference source not found.
14. Define new color management and preview attributes	3.2.17, 3.2.18	6.5.24, 6.5.33
15. Define new roll-fed printing attributes and values	3.2.7, 3.2.11	6.2.2, 6.2.2.2, Error! Reference source not found., 9.2, 9.3
16. Define new supply level and status monitoring attributes	3.2.9	6.6.9, 6.6.10, 6.6.11

17. Define new localization attributes and a message catalog file format	3.2.13	6.5.41, 6.5.42, 11
18. Define new globally unique identifier attributes for all objects	3.2.3	6.4.6, 6.7.1, 6.3.2, 6.6.12
19. Define new preset attributes	3.2.11	6.5.9, 6.5.11

4.1 Limits

The IPP/1.1 Model and Semantics [STD92] defined the "limit" operation attribute for the Get-Jobs operation to allow a Client to specify the maximum number of Jobs to include in the response. The IPP Event Notifications and Subscriptions [RFC3995] also defined the "limit" operation attribute for the Get-Subscriptions operation to allow a Client to specify the maximum number of Jobs to include in the response. Neither defined a way for the Client to specify the index of the first object to return.

This specification defines the new "first-index" operation attribute (section 6.1.4) and defines the semantics for the "limit" operation attribute for the Get-Printer-Attributes operation (section 8.3), Get-Subscriptions operation (section 8.4), Get-Jobs operation (section 8.5), and Get-Documents operation (section 8.6), to provide Clients with a general purpose way to specify limits in any operation request. A Printer that supports the "first-index" and "limit" operation attributes provides its values or objects in a consistent order such that a Client can expect to retrieve all the values or objects using a sequence of requests with increasing values for "first-index". For example, if a Client were to make a sequence of requests supplying the "limit" attribute with a value of 10, the Client would increment the value of "first-index" by 10 in each request ("first-index" = 1, "first-index" = 21, "first-index" = 41, ...). The Client would detect the end of the set when the number of values returned is less than the size of "limit". The Client can be confident that none of the responses will contain redundant values when the Printer implements consistent ordering for its values.

Existing conforming Printer implementations return the 'successful-ok-ignored-or-substituted-attributes' status code when they do not support the "first-index" or "limit" operation attributes for a given request. A Client can always request a limited set of values but needs to be prepared to handle receiving the complete set of values if the Printer doesn't support the "first-index" or "limit" operation attributes.

4.2 Filtering

The IPP/1.1 Get-Printer-Attributes operation [STD92] supports operation response attribute filtering using the "document-format" operation attribute. IPP/1.1 and IPP Event Notifications and Subscriptions [RFC3995] both support operation response attribute filtering based on the "requesting-user-name" operation attribute or most authenticated user for Job and Subscription operations. The Get-User-Printer-Attributes operation [PWG5100.11] provides

797 an operation similar to Get-Printer-Attributes that supports operation response attribute
798 filtering based on the most authenticated user.

799 This specification extends response attribute filtering by defining the "printer-get-attributes-
800 supported" Printer Description attribute (section 6.5.32) that provides the list of additional
801 attributes the Printer will use to filter its response, so that a Client can determine which
802 attributes and attribute values are supported for a particular type of Job. This specification
803 also defines the new "ipp-features-supported" attribute (section 6.5.5) and "printer-kind"
804 (section 6.5.36) to enable the Printer to declare support for high-level features and
805 capabilities.

806 **4.3 Constraints**

807 Some Job Template and operation attributes and attribute values are "constrained" in that
808 they cannot both exist in a single Job. Printers can express constraints between Job
809 Template attributes or attribute values for practical reasons (e.g., two-sided printing on
810 glossy photo or transparency media types), physical reasons (e.g., label printing from a
811 paper tray), or possibly other reasons. The Client detects constraints in the Job Ticket using
812 the new "job-constraints-supported" (section 6.5.6) Printer Description attributes to detect
813 constraints in the Job Ticket. The Client resolves the detected constraint using the resolution
814 referenced in the "job-resolvers-supported" (section 6.5.10) Printer Description attribute.

815 The Client can request the Printer perform constraint resolution by submitting a Validate-Job
816 [STD92] or Validate-Document (section 5.2) request with the desired Job Template or
817 Document Template attributes. The Printer supplies the "preferred-attributes" collection
818 attribute (section 6.1.6) in the response indicating which substitute values will resolve the
819 detected conflicts.

820 There is no Validate-Subscription operation because subscriptions always enforce attribute
821 fidelity.

822 **4.4 Printer Resources**

823 This specification defines IPP attributes whose values are URIs pointing to resources such
824 as printer icons, ICC profiles, and message catalog files. A supporting Client can retrieve
825 these resources using the protocol corresponding to the URI's scheme. Section 12.2
826 provides Printer best practices for supporting Printer resources.

827 **4.5 ICC Color Management and Color Mode Previews**

828 This specification supports managed color workflow by defining the new "printer-icc-profiles"
829 Printer Description attribute that lists the Printer's supported ICC color profile resources
830 [ISO15076-1]. Clients can download and use the Printer's ICC color profile resources for
831 color proofing and related workflows. This specification also defines the "print-rendering-
832 intent" Job Template attributes to indicate how the Printer should handle rendering e.g. how

black pixels are rendered could vary depending on whether the Document contains predominately text or image content. Finally, this specification defines the "print-color-mode" Job Template attribute to request that the Printer perform a color transformation when processing the Job. The Client can present a color transformation preview to the End User using ICC profiles listed in the Printer's "print-color-mode-icc-profiles" Printer Description attribute.

4.6 Localization

This specification defines and registers an existing plain text message catalog file format (MIME media type "text/strings") used on NeXT's NeXTSTEP [NEXTSTEP] and Apple's macOS [MACOS] operating systems, that allows a Printer to provide a Client with localized textual values ("localized strings") for attribute names and/or attribute values. For example, a Printer that supports vendor-unique media sizes and "printer-state-reasons" keywords could provide the localized labels for these in its message catalogs. A Printer Description attribute allows the Client to discover the location of message catalogs for the language specified by the "attributes-natural-language" attribute in the Client request. Clients can also use the HTTP If-Modified-Since header to detect whether the referenced message catalog has been updated. The message catalog syntax also supports inline help content to be associated with a given attribute or attribute keyword / enum value.

4.7 Unique Identifiers

This specification defines new UUID attributes for the Printer, Job, Document and Subscription IPP object types so that each object may be uniquely identified. This specification also defines the "device-service-count" (section 6.6.1) and "device-uuid" (section 6.6.2) Printer Status attributes. The "device-uuid" attribute allows a Client to correlate multiple IPP-based services to a single device or server. The "device-service-count" attribute allows a Client to detect whether a particular device or server provides more than one IPP-based service, regardless of the type of service offered.

4.8 Presets and Triggers

There are circumstances where a group of settings are chosen and applied as a set, to achieve some common printing workflow or use case. For example, selecting a common photo media size such as 4"x6" implies a desire to print photos, and a sophisticated Client could implement heuristics that automatically choose other settings automatically, such as changing media type to glossy photo, setting the print quality to 'best', without requiring End Users engagement. Many Clients' vendor driver systems support such heuristics.

This specification defines the new "job-presets-supported" Printer Description attribute (section 6.5.9) which lists Presets for its Clients and allows a Printer to optionally accept new Presets defined on the Client. This specification also defines the new "job-triggers-supported" Printer Description attribute (section 6.5.11) to provide a way for a Client to implicitly select a Preset if the Job Ticket contains a matching set of attributes and values.

4.9 Print Quality

The "print-quality" Job Template attribute [STD92] is not easily extensible. This specification defines a "preset-category" member attribute (section 6.5.9.1) for the "job-presets-supported" Printer Description attribute (section 6.5.9) to identify Presets that represent print quality choices for the Printer.

This specification also defines the new "print-processing-attributes-supported" Printer Description attribute (section 6.5.25) that names all the Job Template attributes that affect the visual processing of a Job.

4.10 Client Metadata for Job Accounting

Job Accounting is used for recording information about Jobs and how Printers processed Jobs. This information is used for a variety of purposes. It can be very useful to have information about the Client submitting the Job, or other actors that were responsible for generating the originating document or spool file. This specification defines the "client-info" operation attribute (section 6.1.1) to let a Client supply name and version information about itself and any relevant components providing Job Ticket or content information for the Job.

5. New Operations

5.1 Identify-Printer

This CONDITIONALLY REQUIRED operation allows a Client to request the Printer to physically identify itself by flashing lights, making sounds, or presenting a message on the Console. A Printer MUST implement this operation if it is a Physical Device.

The Printer SHOULD only allow authorized users to perform this operation. The Printer MAY implement other safeguards to prevent abuse. The Printer MUST reject the operation and return the 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' status code, as appropriate.

5.1.1 Identify-Printer Request

An Identify-Printer request includes the following groups of attributes:

Group 1: Operation Attributes

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in [STD92]

901 Target:
902 The "printer-uri" (uri) operation attribute which is the target for this operation as
903 described in [STD92]

904 Requesting User:

905 The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the
906 Client as described in [STD92]. In addition, the "requesting-user-uri" (section
907 6.1.7) attribute SHOULD be supplied by the Client as well.

908 "identify-actions" (1setOf type2 keyword) [section 6.1.5]:

909 The Client MAY supply this attribute. The Printer MUST support this attribute. The
910 value(s) specify how the Printer will identify itself to the Client.

911 "message" (text(127)):

912 The Client MAY supply this attribute. The Printer MAY supports this attribute. It is
913 a message to the user for purposes of identifying the Printer to the user.

914 **5.1.2 Identify-Printer Response**

915 The following attributes are part of the Identify-Printer Response:

916 Group 1: Operation Attributes

917 Status Message:

918 In addition to the REQUIRED status code returned in every response, the
919 response MAY includes a "status-message" (text(255)) and/or a "detailed-
920 status-message" (text(MAX)) operation attribute as described in [STD92] and
921 Appendix B.

922 Natural Language and Character Set:

923 The "attributes-charset" and "attributes-natural-language" attributes as
924 described in [STD92].

925 Group 2: Unsupported Attributes

926 See [STD92] for details on returning Unsupported Attributes.

927 **5.2 Validate-Document**

928 This DEPRECATED operation allows a Client to verify operation and Document Template
929 attributes it be used in a later Send-Document or Send-URI request. Printers that implement

the IPP Document Object [PWG5100.5] MUST implement this operation. This operation is similar to the Validate-Job operation [STD92] except that it validates attributes used for the Send-Document or Send-URI operations. The Validate-Document operation does not create a Document object. The Validate-Document operation does not require a preceding operation since it is only validating attributes to be used later.

Clients MUST NOT supply the "document-password" operation attribute (section 6.1.3) in a Validate-Document request. Printers MUST reject a Validate-Document request supplying a "document-password" operation attribute and return the 'client-error-bad-request' status code.

5.2.1 Validate-Document Request

The following groups of attributes are supplied as part of the Validate-Document Request:

Group 1: Operation Attributes

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in [STD92].

Target:

The "printer-uri" (uri) operation attribute which is the target for this operation as described in [STD92].

Requesting User:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the Client as described in [STD92]. In addition, the "requesting-user-uri" (section 6.1.7) attribute SHOULD be supplied by the Client as well.

"document-name" (name(MAX))

The "document-name" attribute as described for the "Send-Document" operation [STD92].

"document-format" (mimeMediaType)

The "document-format" attribute as described for the "Send-Document" operation [STD92].

Group 2: Document Template Attributes

The client MAY supply a set of Document Template attributes and SHOULD omit Group 2 rather than sending an empty group. However, a Printer MUST be able to accept an empty group.

5.2.2 Validate-Document Response

The following attributes are part of the Validate-Document Response:

Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response MAY include a "status-message" (text(255)) and/or a "detailed-status-message" (text(MAX)) operation attribute as described in [STD92] 4.1.6 and Appendix B.

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in [STD92].

"preferred-attributes" (collection):

This attribute (defined in section 6.1.6) MAY be returned when conflicts are detected in the supplied Operation and Document Template attributes.

Group 2: Unsupported Attributes

See [STD92] for details on returning Unsupported Attributes.

6. New Attributes

6.1 Operation Attributes

Table 2 lists the operation attributes defined in this specification and associated conformance requirements for Printer support.

Table 2 - New Operation Attributes

Attribute	Printer Conformance
client-info	REQUIRED
document-metadata	REQUIRED
document-password	CONDITIONALLY REQUIRED
first-index	REQUIRED
identify-actions	CONDITIONALLY REQUIRED
preferred-attributes	RECOMMENDED
requesting-user-uri	REQUIRED

6.1.1 client-info (1setOf collection)

This REQUIRED operation attribute supplies information identifying the name and version of the Client and software packages contributing content to a Job Creation Operation. This might include the originating application and any intermediate modules transforming the Document content or the Job Ticket. The Printer MUST copy this attribute to the corresponding Job Status attribute of the same name (section 6.4.1) when processing Job Creation operation requests.

6.1.1.1 client-name (name(MAX))

This REQUIRED member attribute supplies the human-readable name of the Client or module contributing to the request.

6.1.1.2 client-patches (text(MAX) | 'no-value')

This REQUIRED member attribute supplies the list of patches installed. A Client supplies the 'no-value' out-of-band value if there are no patches to report.

6.1.1.3 client-string-version (text(MAX))

This REQUIRED member attribute supplies the human-readable version string.

6.1.1.4 client-version (octetString(64) | 'no-value')

This REQUIRED member attribute supplies the machine-readable version value. A Client supplies the 'no-value' out-of-band value if the module has only a string version value supplied by the "client-string-version" attribute (section 6.1.1.3).

6.1.2 document-metadata (1setOf octetString(MAX))

This REQUIRED operation attribute specifies one or more keyword/value pairs describing the Document supplied in the operation. Each element in the set consists of a keyword followed by "=" and a UTF-8 value string. Standard keywords are defined in The Dublin Core Metadata Element Set [RFC5013] and DCMI Metadata Terms [DCMITERMS]. Vendor or customer-defined keywords MUST use the prefix string "x-" to avoid future keyword name conflicts, for example "x-vendor-foo" or "x-customer-bar". Figure 1 provides a complete ABNF definition. The ABNF is also available externally [ABNF].

Printers MUST copy this attribute to the corresponding Job Status (section 6.4.1) or Document Status (section 6.3.1) attribute of the same name when processing Print-Job, Print-URI, Send-Document, or Send-URI requests (section 8.7).

Figure 1 - ABNF for "document-metadata" Values

```
document-metadata = dc-elements "=" *utf8-char /
                   dc-terms  "=" *utf8-char /
                   x-keyword "=" *utf8-char
```

```

1018 dc-elements = "contributor" / "coverage" / "creator" /
1019               "date" / "description" / "format" /
1020               "identifier" / "language" / "publisher" /
1021               "relation" / "rights" / "source" /
1022               "subject" / "title" / "type"
1023
1024 dc-terms      = "abstract" / "accessRights" / "accrualMethod" /
1025               "accrualPeriodicity" / "accrualPolicy" / "alternative" /
1026               "audience" / "available" / "bibliographicCitation" /
1027               "conformsTo" / "created" / "dateAccepted" /
1028               "dateCopyrighted" / "dateSubmitted" / "educationLevel" /
1029               "extent" / "hasFormat" / "hasPart" / "hasVersion" /
1030               "instructionalMethod" / "isFormatOf" / "isPartOf" /
1031               "isReferencedBy" / "isReplacedBy" / "isRequiredBy" /
1032               "issued" / "isVersionOf" / "license" / "mediator" /
1033               "medium" / "modified" / "provenance" / "references" /
1034               "replaces" / "requires" / "rightsHolder" / "spatial" /
1035               "tableOfContents" / "temporal" / "valid"
1036
1037 x-keyword     = "x-" 1*(ALPHA / DIGIT / "." / "-" / "_")
1038
1039 utf8-char     = %x20-7E /
1040               %xC0-DF.80-BF /
1041               %xE0-EF.80-BF.80-BF /
1042               %xF0-F7.80-BF.80-BF.80-BF

```

6.1.3 document-password (octetString(1023))

This CONDITIONALLY REQUIRED operation attribute supplies an unencrypted passphrase, OAuth token, or other typically alphanumeric string used to "unlock" a protected PDF Document provided with the Print-Job, Print-URI, Send-Document, or Send-URI operations (section 8.7). A Printer MUST support this operation attribute if it supports the "application/pdf" MIME media type in its "document-format-supported" Printer Description attribute [STD92]. A Printer MUST support this attribute if it supports the "document-password-supported" attribute (section 6.5.1). The "document-password-supported" Printer Description attribute indicates the maximum value length the Printer will accept for a supplied "document-password" operation attribute.

While this attribute's value is necessarily associated with the Document supplied in the operation, this attribute is not part of the Job or Document object. The Printer MUST NOT provide this attribute as a Job Status, Job Description, Document Status or Document Description attribute. The Printer MUST retain this value while the corresponding Document is retained.

Printers and Clients that support this attribute MUST support Secure Transport. A Client MUST negotiate a TLS session prior to sending a request supplying this attribute. A Printer MUST negotiate a TLS session prior to accepting a request supplying this attribute.

6.1.4 first-index (integer(1:MAX))

This REQUIRED operation attribute specifies the first object or element the Printer is to provide in the response for all attributes that use a "1setOf" syntax. If a Printer supports this operation attribute, it MUST consistently order the values in all attributes implementing a "1setOf" syntax. The first value in each set has the index 1.

6.1.5 identify-actions (1setOf type2 keyword)

This CONDITIONALLY REQUIRED operation attribute specifies the action or actions the Printer takes to identify itself in response to an Identify-Printer request (section 5.1). A Printer MUST support this operation attribute if it implements the Identify-Printer operation. Table 3 lists the keywords defined in this specification.

Table 3 - "identify-actions" Keyword Values

Keyword	Description
display	Displays a message on the Console.
flash	Flashes lights or the display on the printer.
sound	Makes a sound.
speak	Speaks the default or Client-provided message.

Note: This specification does not define a "print" action due to security and accounting concerns.

6.1.6 preferred-attributes (collection)

This RECOMMENDED operation attribute is supplied by the Printer in a Validate-Job response (section 8.10) or Validate-Document response (section 5.2) when the Printer detects constraints between attribute values supplied in the request, to provide the Client with a preferred set of non-conflicting attributes and values acceptable by the Printer. Each member attribute in the collection names an operation, Job Template, or Document Template attribute supplied in the request with the corresponding replacement value(s). A supporting Client SHOULD adopt all the values supplied by this attribute as a set.

Note: This is semantically different than the collections listed by the "job-resolvers-supported" Printer Description attribute (section 6.5.10).

6.1.7 requesting-user-uri (uri)

This REQUIRED operation attribute supplies a URI uniquely identifying the End User submitting the request to augment the "requesting-user-name" operation attribute [STD92] since its value is often not unique (e.g. "John Doe"). The Printer MAY modify the value supplied based on information obtained from an authentication service [STD92].

The value MUST be a URI using one of the schemes listed by the Printer's "requesting-user-uri-schemes-supported" Printer Description attribute (section 6.5.44). Commonly used URI

schemes include the "urn" scheme [RFC4122] to encode a UUID, and the "mailto:" URI scheme [RFC6068] to encode an email address.

6.2 Job and Document Template Attributes

Table 4 lists the Job and Document Template attributes defined in this specification and associated conformance requirements for Printer support.

Table 4 - New Job and Document Template Attributes

Attribute	Printer Conformance
job-error-action	RECOMMENDED
media-overprint	CONDITIONALLY REQUIRED
media-overprint-type	CONDITIONALLY REQUIRED
print-color-mode	REQUIRED
print-rendering-intent	CONDITIONALLY REQUIRED

6.2.1 job-error-action (type2 keyword)

This RECOMMENDED Job Template attribute specifies the action a Printer takes when it encounters a Job processing error. Table 5 lists standard keyword values.

Table 5 - "job-error-action" Keyword Values

Keyword	Description
abort-job	Stop processing the Job and move it to the 'aborted' state. The 'aborted-by-system' keyword MUST be present in the "job-state-reasons" Job Description attribute.
cancel-job	Stop processing the Job as if the Printer had accepted a Cancel-Job request [STD92] for that Job. The 'job-canceled-by-user' keyword MUST be present in the "job-state-reasons" Job Description attribute.
continue-job	Continue processing the next Document in the Job or, if this is the last Document in the Job, move the Job to the 'completed' state.
suspend-job	Stop processing the Job and move it to the 'processing-stopped' state as if the Printer had accepted a Suspend-Current-Job request [RFC3998]. The 'job-suspended-by-user' keyword MUST be present in the "job-state-reasons" Job Description attribute.

6.2.2 media-overprint(collection)

This RECOMMENDED Job Template attribute is a collection that indicates how far and by what method the Printer expands each Impression beyond the media margins to "overprint" the Impression on the media. The collection has two members: "overprint-distance" (section 6.2.2.1) and "overprint-method" (section 6.2.2.2).

6.2.2.1 media-overprint-distance(integer(0:MAX))

This member attribute supplies how far in hundredths of millimeters ($1/2540^{\text{th}}$ of an inch) the Printer expands each Impression beyond the selected media size's margins. If the value of this member attribute is greater than the the selected media size's margins, then the Impression will "overprint" past the physical edges of the media. The value MUST be within the range supplied by the Printer's "media-overprint-distance-supported" Printer Description attribute (section 6.5.16).

6.2.2.2 media-overprint-method (type2 keyword)

This member attribute indicates the method the Printer uses to expand each Impression beyond the selected media size's margins. Table 6 lists the defined standard keyword values and their meanings. The value MUST be one of the keywords listed by the Printer's "media-overprint-method-supported" Printer Description attribute (section 6.5.17).

Table 6 - "media-overprint-type" Keyword Values

Keyword	Description
none	Impression's size not expanded
scale	Input Page scaled to expand the Impression's size
extend	Input Page edge pixel color values "extended" outward to expand the Impression's size

Figure 2 illustrates the 'scale' overprint method, where the entire Impression is scaled up to cover the additional area specified by "overprint-distance". expand the Impression on each side of the media where overprint would occur.

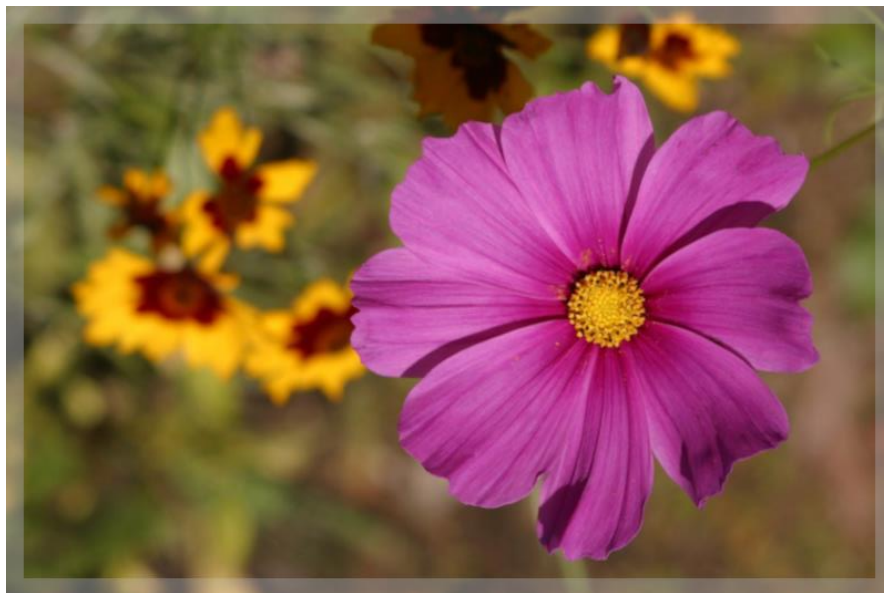


Figure 2 - Extending the marked area with "media-overprint"

Figure 3 illustrates the 'extend' overprint method, where the edge pixel values are extended outward overprint regions on each side of the media where overprint would occur.

**Figure 3 - Extending the marked area with "media-overprint"**

6.2.3 print-color-mode (type2 keyword)

This REQUIRED Job Template attribute indicates the color mode the Printer uses when printing a Job. The Printer MUST print the Job using the requested color mode or reject the Job. Table 7 lists the keyword values defined in this specification. Unregistered keywords SHOULD follow the implementation guidance in [STD92] section 7.3.

Table 7 - "print-color-mode" Keyword Values

Keyword	Description	Conformance
auto	Automatic based on Document	REQUIRED
auto-monochrome	Printer chooses monochrome or process-monochrome based on Document	RECOMMENDED
bi-level	1-colorant (typically black) threshold output	OPTIONAL (note 1)
color	Full-color output	CONDITIONALLY REQUIRED (note 2)
highlight	1-colorant + black output	OPTIONAL
monochrome	1-colorant (typically black) shaded/grayscale output	REQUIRED
process-bi-level	Process (2 or more colorants) threshold output	OPTIONAL

process-monochrome	Process (2 or more colorants) shaded/grayscale output	OPTIONAL (note 3)
--------------------	--	-------------------

Notes:

- 1 - Optional because the actual appearance is implementation-specific.
- 2 - Required for color Printers.
- 3 - Optional because process black on laser printers can be problematic.

6.2.4 print-rendering-intent (type2 keyword)

This CONDITIONALLY REQUIRED Job Template attribute specifies how the Printer maps out-of-gamut colors (or shades of gray) to device colors when printing. A Printer MUST support this attribute if it supports the "printer-icc-profiles" attribute (section 6.5.33). If supported, the Printer MUST print the Job using the requested rendering intent. Table 8 lists the standard keyword values.

Table 8 - "print-rendering-intent" Keyword Values

Keyword	Description	Conformance
absolute	Clip out-of-gamut colors to preserve in-gamut accuracy without adjusting the white point.	OPTIONAL
auto	Automatically determine the rendering intent based on the Document and Job Ticket.	REQUIRED
perceptual	Map out-of-gamut colors at the expense of in-gamut accuracy.	OPTIONAL
relative	Clip out-of-gamut colors to preserve in-gamut accuracy, adjusting the white point as necessary.	REQUIRED
relative-bpc	Clip out-of-gamut colors to preserve in-gamut accuracy, adjusting both the white and black points as necessary. (bpc = Black Point Compensation)	REQUIRED
saturation	Preserve saturated colors.	OPTIONAL

6.2.5 print-scaling (type2 keyword)

This REQUIRED Job Template attribute specifies how the Printer scales the Document's Input Pages to the requested media. Table 9 lists the keywords defined in this specification.


Table 9 - "print-scaling" Keyword Values

Keyword	Description
---------	-------------


'auto'	If the “ipp-attribute-fidelity” attribute is true or the Input Pages are larger than the requested Media Sheets, scale the Document using the 'fit' method if the margins are non-zero, otherwise scale using the 'fill' method. If the “ipp-attribute-fidelity” attribute is false or unspecified and the Input Pages are smaller than the requested Media Sheets, scale using the 'none' method.
'auto-fit'	If the “ipp-attribute-fidelity” attribute is true or the Input Pages are larger than the requested Media Sheets, scale the Document using the 'fit' method. Otherwise, scale using the 'none' method.
'fill'	Scale the Document to fill the requested media size, preserving the aspect ratio of the Document data but potentially cropping portions of the Document.
'fit'	Scale the Document to fit the printable area of the requested media size, preserving the aspect ratio of the Document data without cropping the Document.
'none'	Do not scale the Document to fit the requested media size. If the Document is larger than the requested media, center and clip the resulting output. If the Document is smaller than the requested media, center the resulting output.

1149 The 'auto' value is typically the default. Figure 4 shows how a Printer scales a 3:2 aspect
1150 ratio photo image using the 'fit' and 'fill' values on US Letter and US Legal media.


media='na_letter_8.5x11in'
print-scaling='fit'

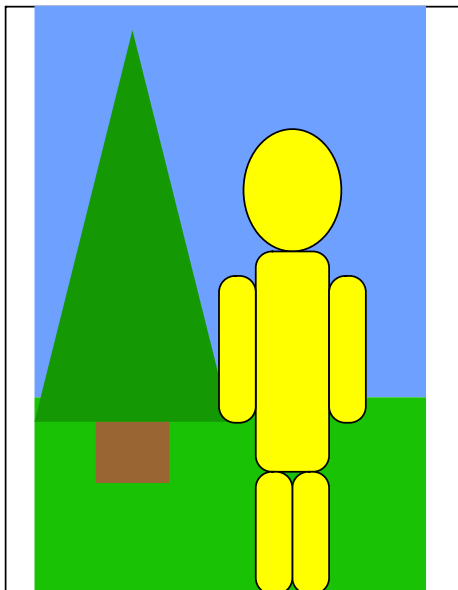


media='na_letter_8.5x11in'
print-scaling='fill'

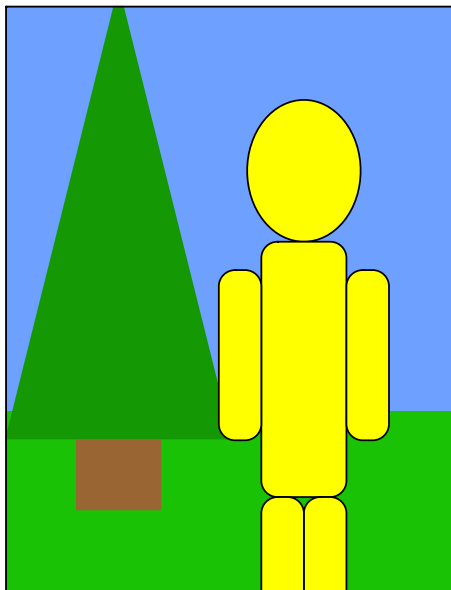

media='na_legal_8.5x14in'
print-scaling='fit'

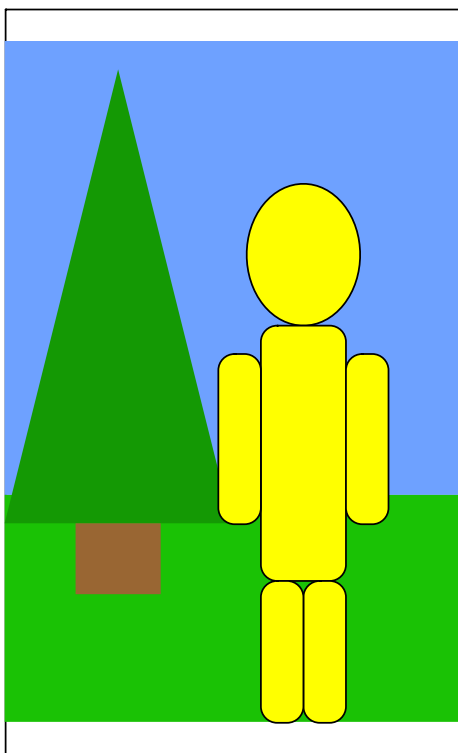

media='na_legal_8.5x14in'
print-scaling='fill'

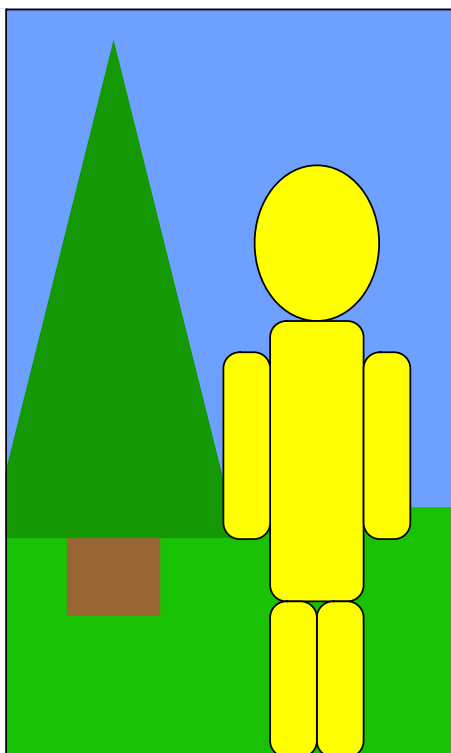

1151

Figure 4 - "print-scaling" Values

6.3 Document Status Attributes

Table 10 lists the Document Status attributes defined in this specification and associated conformance requirements for Printer support.

Table 10 - New Document Status Attributes

Attribute	Printer Conformance
document-metadata	CONDITIONALLY REQUIRED
document-uuid	CONDITIONALLY REQUIRED
pages	RECOMMENDED
pages-completed	RECOMMENDED

6.3.1 document-metadata (1setOf octetString(MAX))

This CONDITIONALLY REQUIRED Document Status attribute specifies one or more keyword/value pairs describing the Document. A Printer MUST support this attribute when it supports the IPP Document Object [PWG5100.5]. The Printer copies the "document-metadata" operation attribute to this attribute as described in section 8.7.

6.3.2 document-uuid (uri(45))

This CONDITIONALLY REQUIRED Document Status attribute specifies a globally unique identifier that MUST be a 45-octet "urn:uuid" URI [RFC4122]. The Printer generates the globally unique identifier when it creates a new Document object in response to a document creation operation, which can be part of a Job Creation Operation. A Printer MUST support this attribute if the Printer supports the IPP Document Object [PWG5100.5]. A Client MUST NOT use this attribute as a Document identifier in IPP Document operations. A Printer MAY use the value of this attribute as a Document identifier in other protocol bindings.

6.3.3 pages (integer(0:MAX))

This RECOMMENDED Document Status attribute indicates the total number of Input Pages for the Document. A Printer MUST support this attribute if it supports the "pages-completed" Document Status attribute (section 6.3.4).

6.3.4 pages-completed (integer(0:MAX))

This RECOMMENDED Document Status attribute indicates the total number of Input Pages of the Document that the Printer has processed. A Printer MUST support this attribute if it supports the "pages" Document Status attribute (section 6.3.3).

6.4 Job Status Attributes

Table 11 lists the Job Status attributes defined in this specification and associated conformance requirements for Printer support.

Table 11 - New Job Status Attributes

Attribute	Printer Conformance
client-info	CONDITIONALLY REQUIRED
document-metadata	CONDITIONALLY REQUIRED
job-originating-user-uri	RECOMMENDED
job-pages	RECOMMENDED
job-pages-completed	RECOMMENDED
job-uuid	REQUIRED

6.4.1 client-info (1setOf collection)

This REQUIRED Job Status attribute lists the name and version information for the Client that created the Job, provided by the Client in the "client-info" operation attribute (section 6.1.1).

6.4.2 document-metadata (1setOf octetString(MAX))

This CONDITIONALLY REQUIRED Job Status attribute specifies one or more keyword/value pairs describing the Document content supplied with this Job. The Printer MUST support this Job Status attribute if it doesn't support the IPP Document Object [PWG5100.5]. The Printer copies the "document-metadata" operation attribute to this attribute as defined in section 8.7.

6.4.3 job-originating-user-uri (uri)

This RECOMMENDED Job Status attribute supplies a URI that uniquely identifies the most authenticated user who instigated the Job Creation Operation as described in section 8.1.

6.4.4 job-pages (integer(0:MAX))

This RECOMMENDED Job Status attribute supplies the total number of Input Pages in all the Documents in the Job. A Printer MUST support this attribute if it supports the "job-pages-completed" Job attribute (section 6.4.5).

6.4.5 job-pages-completed (integer(0:MAX))

This RECOMMENDED Job Status attribute specifies the total number of Input Pages of the Documents in the Job the Printer has processed. A Printer MUST support this attribute if it supports the "job-pages" Job Status attribute (section 6.4.4).

6.4.6 job-uuid (uri(45))

This REQUIRED Job Status attribute specifies a globally unique identifier for the Job, which is used for tracking Jobs over a long period of time. The value MUST be a 45-octet "urn:uuid" URI [RFC4122]. The Printer generates the globally unique identifier when it creates the Job object in response to a Job Creation Operation. A Client MUST NOT use this attribute as the target in IPP Job requests. If a Printer receives an operation request supplying this attribute, then the Printer MUST reject the operation and return the 'client-error-bad-request' status code. A Printer MAY use the value of this attribute as a Job identifier for other protocol bindings.

6.5 Printer Description Attributes

Table 12 lists the Printer Description attributes defined in this specification and associated conformance requirements for Printer support.

Table 12 - New Printer Description Attributes

Attribute	Printer Conformance
client-info-supported	REQUIRED
document-password-supported	CONDITIONALLY REQUIRED
identify-actions-default	CONDITIONALLY REQUIRED
identify-actions-supported	CONDITIONALLY REQUIRED
ipp-features-supported	REQUIRED
job-constraints-supported	RECOMMENDED
job-error-action-default	OPTIONAL
job-error-action-supported	OPTIONAL
job-presets-supported	RECOMMENDED
job-resolvers-supported	RECOMMENDED
job-triggers-supported	OPTIONAL
jpeg-features-supported	CONDITIONALLY REQUIRED
jpeg-k-octets-supported	CONDITIONALLY REQUIRED
jpeg-x-dimension-supported	CONDITIONALLY REQUIRED
jpeg-y-dimension-supported	CONDITIONALLY REQUIRED
media-overprint-distance-supported	OPTIONAL
media-overprint-method-supported	OPTIONAL
multiple-operation-time-out-action	OPTIONAL
pdf-k-octets-supported	CONDITIONALLY REQUIRED
pdf-versions-supported	CONDITIONALLY REQUIRED
preferred-attributes-supported	RECOMMENDED
print-color-mode-default	REQUIRED
print-color-mode-supported	REQUIRED
print-color-mode-icc-profiles	RECOMMENDED
print-processing-attributes-supported	OPTIONAL
print-rendering-intent-default	OPTIONAL
print-rendering-intent-supported	OPTIONAL

print-scaling-default	OPTIONAL
print-scaling-supported	OPTIONAL
printer-dns-sd-name	RECOMMENDED
printer-geo-location	RECOMMENDED
printer-get-attributes-supported	REQUIRED
printer-icc-profiles	RECOMMENDED
printer-icons	REQUIRED
printer-input-tray	CONDITIONALLY REQUIRED
printer-kind	REQUIRED
printer-mandatory-job-attributes	OPTIONAL
printer-organization	RECOMMENDED
printer-organizational-unit	RECOMMENDED
printer-output-tray	CONDITIONALLY REQUIRED
printer-strings-languages-supported	CONDITIONALLY REQUIRED
printer-strings-uri	CONDITIONALLY REQUIRED
requesting-user-uri-supported	RECOMMENDED
requesting-user-uri-schemes-supported	RECOMMENDED

1216 **6.5.1 client-info-supported (1setOf type2 keyword)**

1217 This REQUIRED Printer Description attribute lists the members the Printer supports for the
1218 "client-info" operation attribute (section 6.1.1).

1219 **6.5.2 document-password-supported (integer(0:1023))**

1220 This OPTIONAL Printer Description attribute indicates the maximum number of octets the
1221 Printer will accept for a "document-password" operation attribute (section 6.1.3). A Printer
1222 that supports the "document-password" attribute MUST support this attribute.

1223 Although the syntax allows a wider range of values, a Printer that supports this attribute
1224 MUST supply either a value in the range 255...1023, or 0 (zero) to indicate that the
1225 "document-password" operation attribute is not supported. A Printer MUST NOT supply a
1226 value in the range 1...254 for this attribute.

1227 **6.5.3 identify-actions-default (1setOf type2 keyword)**

1228 This CONDITIONALLY REQUIRED Printer Description attribute indicates the default set of
1229 values the Printer will use for the "identify-actions" operation attribute (section 6.1.5) if the
1230 Client omits it from an Identify-Printer operation request (section 5.1). A Printer MUST
1231 support this attribute if it supports the Identify-Printer operation.

1232 **6.5.4 identify-actions-supported (1setOf type2 keyword)**

1233 This CONDITIONALLY REQUIRED Printer Description attribute lists the values supported
1234 by the Printer for the "identify-actions" operation attribute (section 6.1.5). A Printer MUST
1235 support this attribute if it supports the Identify-Printer operation (section 5.1).

6.5.5 ipp-features-supported (1setOf type2 keyword)

This REQUIRED Printer Description attribute lists the IPP extension features supported by the Printer. Table 13 lists the keywords defined in this specification. A Printer MUST supply 'none' if the set would otherwise be empty and MUST NOT supply the 'none' keyword if any other keyword is present.

Table 13 - "ipp-features-supported" Keyword Values

Keyword	Description
none	No extension features are supported.
document-object	IPP Document Object [PWG5100.5]
page-overrides	Page overrides from IPP Page Overrides [PWG5100.6]
production	IPP Production Printing Extensions [PWG5100.3]
subscription-object	IPP Event Notifications and Subscriptions [RFC3995]

6.5.6 job-constraints-supported (1setOf collection)

This RECOMMENDED Printer Description attribute lists collections of Job Template attributes and values that are incompatible with one another, likely causing the Printer to reject a Job Creation Operation supplying those attributes and values. A supporting Client uses these collections to recognize conflicting options and provide a resolution prior to Job Creation or validation. A Printer MUST support this attribute if it supports the "job-resolvers-supported" Printer Description attribute (section 6.5.10).

Each collection consists of two or more Job Template attributes and values that are constrained by one another, and a "resolver-name (name(MAX))" member attribute that names a matching collection in the Printer's "job-resolvers-supported" Printer Description attribute. Multiple collections in this attribute can name the same collection in "job-resolvers-supported". Each Job Template attribute can supply more than one value to reduce the size of this attribute. Constraints for the "media-col" Job Template attribute [PWG5100.7] can be incomplete; that is, the "media-col" collection values can contain only those member attributes that contribute to the constraint.

Figure 5 illustrates how a constraint for duplex printing on transparency media could be specified by the Printer.

Figure 5 - Verbose "job-constraints-supported" and "job-resolvers-supported" Example

```

job-constraints-supported=
{
  resolver-name="A"
  sides="two-sided-short-edge"
  media-col={ media-type="transparency" }
},
{
  resolver-name="A"
  sides='two-sided-long-edge'
  media-col={ media-type='transparency' }
}

```

```
1270 }
1271
1272 job-resolvers-supported=
1273 {
1274     resolver-name="A"
1275     sides="one-sided"
1276     media-col={ media-type='stationery' }
1277 }
```

1278 To minimize the number of collections in "job-constraints-supported", a Printer MAY supply
1279 multiple values for each Job Template attribute named in a collection, using a "1setOf
1280 syntax" representation, if the results will be semantically equivalent. Figure 6 illustrates a
1281 concise representation of the constraints described in Figure 5 where the number of
1282 collections in "job-constraints-supported" was able to be condensed from two to one.

1283 **Figure 6 - Concise "job-constraints-supported" and "job-resolvers-supported" Example**

```
1284 job-constraints-supported=
1285 {
1286     resolver-name="A"
1287     sides="two-sided-long-edge", "two-sided-short-edge"
1288     media-col={ media-type='transparency' }
1289 }
1290
1291 job-resolvers-supported=
1292 {
1293     resolver-name="A"
1294     sides="one-sided"
1295     media-col={ media-type='stationery' }
1296 }
```

1297 **6.5.7 job-error-action-default (type2 keyword)**

1298 This OPTIONAL Printer Description attribute indicates the value the Printer will use for the
1299 "job-error-action" Job Template attribute (section 6.2.1) if a Client omits it from a Job
1300 Creation Operation.

1301 **6.5.8 job-error-action-supported (1setOf type2 keyword)**

1302 This OPTIONAL Printer Description attribute lists the keywords the Printer will accept for the
1303 "job-error-action" Job Template attribute (section 6.2.1).

1304 **6.5.9 job-presets-supported (1setOf collection)**

1305 This RECOMMENDED Printer Description attribute lists the collections describing the
1306 Printer's Presets. Each collection supplies a REQUIRED "preset-name" member attribute
1307 (section 6.5.9.2), a RECOMMENDED "preset-category" member attribute (section 6.5.9.1),
1308 and one or more Job Template attributes and values supported by the Printer. A Client
1309 copies all Job Template attributes and values from the selected Preset to the Job Ticket,
1310 including member attributes that the Client does not natively support, when the End User
1311 selects a Preset. The set of attribute values MUST NOT conflict with one another as

1312 described by a collection in the “job-constraints-supported” Printer Description attribute
1313 (section 6.5.6).

1314 **6.5.9.1 preset-category (type2 keyword)**

1315 This RECOMMENDED member attribute specifies the preset category. Table 14 lists the
1316 keywords defined in this specification. A Printer that supports 'print-quality' presets MUST
1317 provide a 'print-quality' preset for each value listed by its "print-quality-supported" Printer
1318 Description attribute [STD92].

1319 **Table 14 - "preset-category" Keywords**

Keyword	Description
feature	A Preset that selects a particular Printer feature.
print-quality	A Preset that selects a particular print quality level or visual processing mode for the Printer.
site	A Preset defined by the local administrator for a site-specific activity or workflow.

1320 **6.5.9.2 preset-name (keyword | name(MAX))**

1321 This member attribute specifies the unique name for the Preset. Values can be localized
1322 using the message catalog provided at the URL specified by the “printer-strings-uri” Printer
1323 Description attribute (section 6.5.42) or inline if the "name" syntax is used.

1324 **6.5.9.3 Examples**

1325 Below is an example “job-presets-supported” attribute, which includes 5 collections,
1326 described using PAPI notation [PAPI]:

```

1327 job-presets-supported={
1328     preset-name='draft'
1329     preset-category='print-quality'
1330     print-content-optimize='text'
1331     printer-resolution=300dpi
1332 },{
1333     preset-name='normal'
1334     preset-category='print-quality'
1335     print-content-optimize='text-and-graphic'
1336     printer-resolution=600dpi
1337 },{
1338     preset-name='high'
1339     preset-category='print-quality'
1340     print-content-optimize='auto'
1341     printer-resolution=1200dpi
1342 },{
1343     preset-name='photo'
1344     preset-category='print-quality'
1345     print-content-optimize='photo'
1346     print-rendering-intent='relative-bpc'
1347     printer-resolution=1200dpi

```

```
1348 }, {  
1349   preset-name='Marketing Flyers'  
1350   preset-category='site'  
1351   finishings=96(fold-letter)  
1352   media='na_legal_8.5x14in'  
1353   orientation-requested=4(landscape)  
1354   print-content-optimize='text-and-graphic'  
1355   print-rendering-intent='saturation'  
1356   printer-resolution=1200dpi  
1357 }
```

1358 **6.5.10 job-resolvers-supported (1setOf collection)**

1359 This RECOMMENDED Printer Description attribute lists the set of collections that each
1360 provide a list of named resolutions for conflicts between constrained sets of Job Template
1361 attribute values described by the "job-constraints-supported" Printer Description attribute
1362 (section 6.5.6). The Printer MUST support this attribute if it supports the "job-constraints-
1363 supported" Printer Description attribute.

1364 Each collection consists of a "resolver-name (name(MAX))" member attribute and one or
1365 more Job Template attributes and values that will resolve the conflict. A Client MUST only
1366 change as many Job Template attributes as are needed to resolve the constraint and MUST
1367 try each value in the order they are provided in the collection. The Printer MAY list all of the
1368 constrained attributes in order to avoid constraint/resolver loops.

1369 Resolvers containing the "media-col" Job Template attribute [PWG5100.7] may provide an
1370 incomplete value; that is, the "media-col" collection value can contain only those member
1371 attributes that need to be changed to resolve the constraint.

1372 The "resolver-name" member attribute value MUST be used by at least one collection in the
1373 "job-constraints-supported" attribute. Constraint resolvers MUST NOT create loops, such
1374 that the resolver for constraint "A" causes constraint "B", but the resolver for constraint "B"
1375 causes constraint "A".

1376 For example, a resolver for duplex printing on transparency media would be encoded as a
1377 collection containing "resolver-name", "sides", and "media-col" member attributes. The
1378 "sides" member attribute would have the value 'one-sided' while the "media-col" member
1379 attribute would provide a "media-type" member attribute with the value 'stationery'.

1380 **6.5.11 job-triggers-supported (1setOf collection)**

1381 This OPTIONAL Printer Description attribute lists the Triggers stored on the Printer. Each
1382 collection supplies one or more Job Template attributes with values and a "preset-name
1383 (keyword | name(MAX))" member attribute. When the attributes and values in the Job Ticket
1384 on a supporting Client match those in one of this attribute's collections, that will "trigger" the
1385 Client to select the matching Preset from the Printer's "job-presets-supported" Printer
1386 Description attribute (section 6.5.9).

6.5.11.1 Examples

Here is an example “job-triggers-supported” attribute, which includes 2 collections, described using PAPI notation [PAPI]:

```
job-triggers-supported=
{
  preset-name="draft-preset"
  media-col=
  {
    media-type='stationery-recycled'
  }
},
{
  preset-name="photo-preset"
  media-col=
  {
    media-type='photographic','photographic-glossy','photographic-matte'
  }
}
```

In this example, if the user selects the 'stationery-recycled' media type, that will trigger the Client to apply the “draft-preset” Preset from “job-presets-supported”.

6.5.12 jpeg-features-supported (1setOf type2 keyword)

This CONDITIONALLY REQUIRED Printer Description attribute lists the optional features that a Printer supports for a Document identified by the "image/jpeg" MIME media type. A Printer that lists the "image/jpeg" MIME media type in its "document-format-supported" Printer Description attribute [STD92] MUST support this attribute. Table 17 lists the keywords defined in this specification.

Table 15 - "jpeg-features-supported" Keywords

Keyword	Description
'none'	The Printer only supports the baseline JFIF format; this keyword only appears by itself.
'arithmetic'	The Printer supports arithmetic encoding.
'cmyk'	The Printer supports CMYK images.
'deep'	The Printer supports more than 8 bits per component.
'icc'	The Printer supports embedded ICC profiles.
'lossless'	The Printer supports lossless JPEG encoding.
'progressive'	The Printer supports progressive encoding.

1414

1415 **6.5.13 jpeg-k-octets-supported (rangeOfInteger(0:MAX))**

1416 This CONDITIONALLY REQUIRED Printer Description attribute indicates the minimum and
1417 maximum allowable sizes the Printer will accept for a Document identified by the
1418 "image/jpeg" MIME media type, measured in 1K octets (1024 octets or 1KB). Although this
1419 attribute is defined as a range for consistency with "job-k-octets-supported" [STD92], the
1420 lower bound for this attribute is always 0. A Printer that lists the "image/jpeg" MIME media
1421 type in its "document-format-supported" Printer Description attribute [STD92] MUST support
1422 this attribute.

1423 **6.5.14 jpeg-x-dimension-supported (rangeOfInteger(0:65535))**

1424 This CONDITIONALLY REQUIRED Printer Description attribute indicates the maximum
1425 horizontal dimension the Printer will accept for a Document identified by the "image/jpeg"
1426 MIME media type, measured in samples per line. Per the JPEG File Information Format
1427 Version 1.02 [JFIF], the lower bound is always 0. A Printer that lists the "image/jpeg" MIME
1428 media type in its "document-format-supported" Printer Description attribute [STD92] MUST
1429 support this attribute.

1430 **6.5.15 jpeg-y-dimension-supported (rangeOfInteger(1:65535))**

1431 This CONDITIONALLY REQUIRED Printer Description attribute specifies the maximum
1432 vertical dimension the Printer will accept for a Document identified by the "image/jpeg" MIME
1433 media type, measured in lines. Per the JPEG File Information Format Version 1.02 [JFIF],
1434 the lower bound is always 1. A Printer that lists the "image/jpeg" MIME media type in its
1435 "document-format-supported" Printer Description attribute [STD92] MUST support this
1436 attribute.

1437 **6.5.16 media-overprint-distance-supported (1setOf integer(0:MAX))**

1438 This CONDITIONALLY REQUIRED Printer Description attribute indicates the range of
1439 supported values the Printer will accept for the "media-overprint-distance" member (section
1440 6.2.2.1) of the "media-overprint" Job Template attribute (section 6.2.2). If the Printer
1441 supports the "media-overprint" attribute, then it MUST support this attribute.

1442 **6.5.17 media-overprint-method-supported (1setOf type2 keyword)**

1443 This CONDITIONALLY REQUIRED Printer Description attribute indicates the keywords the
1444 Printer will accept for the "media-overprint-method" member (section 6.2.2.2) of the "media-
1445 overprint" Job Template attribute (section 6.2.2). A Printer supporting the "media-overprint"
1446 attribute MUST support either 'scale' or 'extend', and MAY support both. If the Printer
1447 supports the "media-overprint" attribute, then it MUST support this attribute.

6.5.18 multiple-operation-time-out-action (type2 keyword)

This CONDITIONALLY REQUIRED Printer Description attribute indicates the action the Printer takes when an "open" Job (e.g. instantiated but not completed) times out. A Printer that supports the Create-Job operation [STD92] MUST support this attribute. Table 16 lists the available actions.

Table 16 - "multiple-document-time-out-action" Keyword Values

Keyword	Description
abort-job	The Printer closes the Job, moves it to the 'aborted' state, and adds the 'aborted-by-system' keyword to the Job's "job-state-reasons" Job Description attribute [STD92].
hold-job	The Printer closes the Job, moves it to the 'pending-held' state, adds the 'job-hold-until-specified' keyword to the Job's "job-state-reasons" Job Description attribute [STD92], and sets the Job's "job-hold-until" Job Template attribute to 'indefinite'.
process-job	The Printer closes the Job and moves it to the 'pending' or 'processing' state, if the Job has more than one Document. If the Job has no Documents, the Printer takes the action described for the 'abort-job' keyword.

6.5.19 pdf-k-octets-supported (rangeOfInteger(0:MAX))

This CONDITIONALLY REQUIRED Printer Description attribute indicates the minimum and maximum allowable sizes the Printer will accept for a Document identified by the "application/pdf" MIME media type, measured in 1K octets (1024 octets or 1KB). Although this attribute is defined as a range for consistency with "job-k-octets-supported" [STD92], the lower bound for this attribute is always 0. A Printer that lists the "application/pdf" MIME media type in its "document-format-supported" Printer Description attribute [STD92] MUST support this attribute.

6.5.20 pdf-versions-supported (1setOf type2 keyword)

This CONDITIONALLY REQUIRED Printer Description attribute lists the Printer's support for the requirements in the listed specifications. A Printer that lists the "application/pdf" MIME media type in its "document-format-supported" Printer Description attribute [STD92] MUST support this attribute. Table 17 lists the keywords defined in this specification.

Table 17 - "pdf-versions-supported" Keywords

Keyword	Description
'none'	PDF files are not supported; this keyword only appears by itself.

'adobe-1.3'	Adobe PDF Language Reference, Version 1.3 [ADOBEPDF1.3]
'adobe-1.4'	Adobe PDF Language Reference, Version 1.4 [ADOBEPDF1.4]
'adobe-1.5'	Adobe PDF Language Reference, Version 1.5 [ADOBEPDF1.5]
'adobe-1.6'	Adobe PDF Language Reference, Version 1.6 [ADOBEPDF1.6]
'adobe-1.7'	Adobe PDF Language Reference, Version 1.7 [ADOBEPDF1.7] Equivalent to 'iso-32000-1_2008'.
'iso-15930-1_2001'	"Graphic technology -- Prepress digital data exchange -- Use of PDF -- Part 1: Complete exchange using CMYK data (PDF/X-1 and PDF/X-1a)" [ISO15930-1]
'iso-15930-3_2002'	"Graphic technology -- Prepress digital data exchange -- Use of PDF -- Part 3: Complete exchange suitable for colour-managed workflows (PDF/X-3)" [ISO15930-3]
'iso-15930-4_2003'	"Graphic technology -- Prepress digital data exchange using PDF -- Part 4: Complete exchange of CMYK and spot colour printing data using PDF 1.4 (PDF/X-1a)" [ISO15930-4]
'iso-15930-6_2003'	"Graphic technology -- Prepress digital data exchange using PDF -- Part 6: Complete exchange of printing data suitable for colour-managed workflows using PDF 1.4 (PDF/X-3)" [ISO15930-6]
'iso-15930-7_2010'	"Graphic technology -- Prepress digital data exchange using PDF -- Part 7: Complete exchange of printing data (PDF/X-4) and partial exchange of printing data with external profile reference (PDF/X-4p) using PDF 1.6" [ISO15930-7]
'iso-15930-8_2010'	"Graphic technology -- Prepress digital data exchange using PDF -- Part 8: Partial exchange of printing data using PDF 1.6 (PDF/X-5)" [ISO15930-8]
'iso-16612-2:2010'	"Graphic technology -- Variable data exchange -- Part 2: Using PDF/X-4 and PDF/X-5 (PDF/VT-1 and PDF/VT-2)" [ISO16612-2]
'iso-19005-1_2005'	"Document Management – Electronic document file format for long term preservation – Part 1: Use of PDF 1.4 (PDF/A-1)" [ISO19005-1]
'iso-19005-2_2011'	"Document management – Electronic document file format for long-term preservation – Part 2: Use of ISO 32000-1 (PDF/A-2)" [ISO19005-2]

'iso-19005-3_2012'	"Document management -- Electronic document file format for long-term preservation -- Part 3: Use of ISO 32000-1 with support for embedded files (PDF/A-3)" [ISO19005-3]
'iso-23504-1_2020'	"Document management applications — Raster image transport and storage — Part 1: Use of ISO 32000 (PDF/R-1)" [ISO23504-1]
'iso-32000-1_2008'	"Document management—Portable document format—Part 1: PDF 1.7" [ISO32000-1]
'iso-32000-2_2017'	"Document management—Portable document format—Part 1: PDF 2.0" [ISO32000-2]
'pwg-5102.3'	"Portable Document Format: Image Streamable (PDF/is) [PWG5102.3]

1468 **6.5.21 preferred-attributes-supported (boolean)**

1469 This RECOMMENDED Printer Description attribute indicates whether the Printer supports
 1470 the "preferred-attributes" operation attribute (section 6.1.6) in a Validate-Job (section 8.10)
 1471 or Validate-Document (section 5.2) operation response.

1472 **6.5.22 print-color-mode-default (type2 keyword)**

1473 This REQUIRED Printer Description attribute indicates the default value supplied by the
 1474 Printer if a Client omits the "print-color-mode" Job Template attribute (section 6.2.3) from a
 1475 Job Creation Operation.

1476 **6.5.23 print-color-mode-supported (1setOf type2 keyword)**

1477 This REQUIRED Printer Description attribute lists the Printer's supported "print-color-mode"
 1478 keywords. A Printer MUST support this attribute if it supports the "print-color-mode" Job
 1479 Template attribute (section 6.2.3).

1480 If unregistered keywords are among those listed by this attribute, the Printer SHOULD supply
 1481 for all unregistered keywords:

- 1482 • A preview ICC profile listed by its "print-color-mode-icc-profiles" Printer Description
 1483 attribute (section 6.5.24);
- 1484 • A localized user-presentable label in the message catalogs (section 11.1) referenced
 1485 by the Printer's "printer-strings-uri" Printer Description attribute (section 6.5.42);
- 1486 • Supply localized "tooltip" contextual help content (section 11.2) in the message
 1487 catalogs (section 11.1) referenced by the Printer's "printer-strings-uri" Printer
 1488 Description attribute (section 6.5.42).

6.5.24 print-color-mode-icc-profiles (1setOf collection)

This RECOMMENDED Printer Description attribute lists a set of collections that each supply a reference to an ICC profile for previewing the color transformation the Printer will perform when a Client supplies the corresponding "print-color-mode" keyword in a Job Creation Operation. The profiles listed by this attribute are for previewing color transformations, not for color management, which are supplied by the "printer-icc-profiles" Printer Description attribute (section 6.5.33), as discussed in section 4.5.

A Printer SHOULD support this attribute if its "print-color-mode-supported" Printer Description attribute (section 6.5.23) lists unregistered keywords. Each collection in the set MUST have a unique "print-color-mode" value.

6.5.24.1 print-color-mode (type2 keyword)

This REQUIRED member attribute names the print color mode. The Printer MUST supply a keyword listed by the Printer's "print-color-mode-supported" attribute (section 6.5.23).

6.5.24.2 profile-uri (uri)

This REQUIRED member attribute references a Printer Resident or Site Local ICC color profile for previewing the color mode named by the collection's "print-color-mode" member attribute (section 6.5.24.1). The Printer MUST supply an "https" or "http" scheme URI for this member attribute. The Printer SHOULD supply a URI that follows the Printer resources best practices in section 12.2.

6.5.25 print-processing-attributes-supported (1setOf keyword)

This REQUIRED attribute lists the Job and Document Template attributes that specify processing variables such as algorithms, rendering behaviors, and resource limits, to enable a Client to present these in a group to the End User. Printers that support the "media-overprint" (section 6.2.2), "print-color-mode" (section 6.2.3), "print-content-optimize" [PWG5100.7], "print-darkness" [IPPLABEL], "print-rendering-intent" (section 6.2.4), "print-speed" [IPPLABEL], and/or "printer-resolution" [STD92] Job Template attributes MUST list the supported attribute names in the "print-processing-attributes-supported" attribute. Other attributes, such as "media", "copies", "sides", "finishings" etc. that do not directly pertain to this domain MUST NOT be listed.

Vendor-defined Job or Document Template attributes can be listed as well. All attributes listed by this attribute MUST use the 'boolean', 'enum', 'integer', 'keyword' or 'resolution' syntax types. Vendor-defined Printer Description attributes MUST use the 'boolean', '1setOf enum', '1setOf integer | rangeOfInteger', '1setOf keyword', or '1setOf resolution' types.

1522 **6.5.26 print-rendering-intent-default (type2 keyword)**

1523 This OPTIONAL Printer Description attribute indicates the value the Printer will use for the
1524 "print-rendering-intent" Job Template attribute (section 6.2.4) if the Client omits it from a Job
1525 Creation Operation.

1526 **6.5.27 print-rendering-intent-supported (1setOf type2 keyword)**

1527 This OPTIONAL Printer Description attribute lists the keywords the Printer supports for
1528 "print-rendering-intent" Job Template attribute (section 6.2.4). The Printer MUST list the
1529 'relative' and 'relative-bpc' keywords.

1530 **6.5.28 print-scaling-default (type2 keyword)**

1531 This REQUIRED Printer Description attribute indicates the value the Printer will use for the
1532 "print-scaling" Job Template attribute (section 6.2.5) if the Client omits it from a Job Creation
1533 Operation.

1534 **6.5.29 print-scaling-supported (1setOf type2 keyword)**

1535 This REQUIRED Printer Description attribute lists the values the Printer will accept for the
1536 "print-scaling" Job Template attribute (section 6.2.5).

1537 **6.5.30 printer-dns-sd-name (name(63))**

1538 This REQUIRED Printer Description attribute provides the Printer's DNS-SD Instance Name
1539 [RFC6763]. For example, if the Printer registers its service instance "My Specific
1540 Printer._ipp._tcp.local.", this attribute would supply "My Specific Printer".

1541 Printers that support changing the value using the Set-Printer-Attributes operation MUST list
1542 "printer-dns-sd-name" in the "printer-settable-attributes-supported" Printer attribute
1543 [RFC3380]. When a new name is set, the Printer MUST re-register all DNS-SD services
1544 associated with it. However, if the new name causes a collision with other network devices,
1545 the Printer MUST replace the value set with a non-conflicting name as required by Multicast
1546 DNS [RFC6762].

1547 Note: Changing the DNS-SD Instance Name will cause Clients configured with DNS-SD
1548 print queues to suffer service outages due to SRV record resolution failures, and might
1549 prevent Users from recognizing the Printer during discovery / re-discovery.

1550 **6.5.31 printer-geo-location (uri | unknown)**

1551 This RECOMMENDED Printer Description attribute supplies the location of the associated
1552 device using a "geo:" URI scheme [RFC5870]. A Printer MUST supply the 'unknown' out-of-
1553 band value [STD92] when its location has not been set. A Printer that supports this attribute
1554 MUST provide a way to set the location manually. If a Printer supports changing the value
1555 using the Set-Printer-Attributes operation [RFC3380], it MUST list "printer-geo-location" in
1556 the "printer-settable-attributes-supported" Printer Description attribute [RFC3380].

6.5.32 printer-get-attributes-supported (1setOf keyword)

This REQUIRED Printer Description attribute lists the operation and Job Template attributes the Printer will use to filter the set of attributes it returns in a Get-Printer-Attributes operation response. The "document-format" value is REQUIRED for all Printers to conform to IPP/1.1 [STD92]. All other values are OPTIONAL.

6.5.33 printer-icc-profiles (1setOf collection)

This RECOMMENDED Printer Description attribute lists the set of ICC profiles that characterize the Printer's rendering capabilities. Each collection supplies a "profile-name (name(MAX))" member attribute and a "profile-uri (uri)" member attribute. A collection MAY also supply Job Template attributes and values that contribute to the Printer selecting that profile when processing a Job.

A Client uses these ICC profiles for Client-side color proofing and/or color management. The set of ICC profiles MAY be externally managed via IPP or other protocols.

6.5.33.1 profile-name (name(MAX))

This REQUIRED member attribute provides a unique name for a given ICC profile. A given "profile-name" value MAY appear in multiple collection values but MUST always be paired with the same "profile-uri" value. That is, a "profile-name" of "Glossy Paper, High Quality" might be listed multiple times but will always refer to the same "profile-uri", for example "https://example.com/glossy-high.icc".

The "profile-name" value SHOULD be localized by the Printer based on the value of the "attributes-natural-language" operation attribute.

6.5.33.2 profile-uri (uri)

This REQUIRED member attribute references an ICC color profile as a "https:" or "http:" URI. Standard vendor-supplied profiles SHOULD be Printer Resident so that Client printing does not require access to hosts other than the one hosting the Printer. The Printer SHOULD supply a URI that follows the Printer resources best practices in section 12.2.

6.5.34 printer-icons (1setOf uri)

This REQUIRED Printer Description attribute lists URIs for one or more Printer Resident icon images. The Printer MUST supply URIs that use the "https" or "http" scheme. The Printer SHOULD supply URIs that follow the Printer resources best practices in section 12.2.

The referenced images MUST be RGBA PNG [RFC2083] format, have square dimensions of 48x48, 128x128, or 512x512 pixels, represent the physical appearance of the Printer, provide an alpha channel to mask the background surrounding the Printer, and all show the same perspective/view of the Printer. If the Printer only supplies a reference to one image, that image MUST have dimensions of 128x128 pixels. A Printer MUST list images from smallest to largest dimensions.

6.5.35 printer-input-tray (1setOf octetString(MAX))

This CONDITIONALLY REQUIRED Printer Description attribute lists a set of text strings that describe the Printer's currently available input sources. Each string contains an unordered sequence of key/value pairs, structured according to the ABNF [STD68] in Figure 7. Table 18 lists the keys defined in this specification, derived from the relevant machine-readable (non-localized) columnar objects of each prtInputEntry from the prtInputTable object defined in IETF Printer MIB v2 [RFC3805]. A Printer MAY supply site-unique or vendor-unique information using the "input-ext" rule defined in the ABNF. The ABNF is also available externally [ABNF].

Table 18 - "printer-input-tray" Keys

Key	IPP Datatype	Printer MIB Object	Conformance
level	Integer	prtInputCurrentLevel	REQUIRED
maxcapacity	Integer	prtInputMaxCapacity	REQUIRED
mediafeed	Integer	prtInputMediaDimFeedDirDeclared	REQUIRED
mediaxfeed	Integer	prtInputMediaDimXFeedDirDeclared	REQUIRED
name	String	prtInputName	REQUIRED
status	Integer	prtInputStatus	REQUIRED
type	String	prtInputType	REQUIRED
unit	String	prtInputCapacityUnit	RECOMMENDED
dimunit	String	prtInputDimUnit	RECOMMENDED
mediacolor	String	prtInputMediaColor	RECOMMENDED (1)
medianame	String	prtInputMediaName	RECOMMENDED (1)
mediatype	String	prtInputMediaType	RECOMMENDED (1)
mediaweight	Integer	prtInputMediaWeight	OPTIONAL (2)
index	Integer	prtInputIndex	DEPRECATED (3)

Notes:

1. RECOMMENDED because often unknown to the Printer.
2. OPTIONAL because most Printers can't sense loaded media weight.
3. DEPRECATED because correlation with the original MIB order is unimportant.

A Printer MUST support this attribute if it supports the "media-source" member attribute or the "media-source-properties" member attribute for the "media-col-ready" and "media-col-database" Printer Description attributes [PWG5100.7]. If supported, this attribute MUST have the same cardinality (contain the same number of values) as the "media-source-supported" Printer Description attribute [PWG5100.7]. The i^{th} value in the "printer-input-tray" attribute corresponds to the i^{th} value in the "media-source-supported" attribute.

A Printer MUST encode the values of "printer-input-tray" using printable characters from the Net-ASCII subset of the US-ASCII character set [RFC5198]. A Printer MUST NOT supply values that contain characters in the range 0x00 - 0x1F or 0x7F.

Figure 7 - ABNF for "printer-input-tray" Values

```
printer-input-tray = *input-required *[input-optional]
; set of input elements encoded into one value
```

```
1619
1620 input-required      = input-req ";"
1621 input-req            = input-type /
1622                      input-media-feed /
1623                      input-media-xfeed /
1624                      input-max-capacity /
1625                      input-level /
1626                      input-status /
1627                      input-name
1628
1629 input-optional       = input-opt ";"
1630 input-opt            = input-index /
1631                      input-dim-unit /
1632                      input-unit /
1633                      input-media-name /
1634                      input-media-weight /
1635                      input-media-type /
1636                      input-media-color /
1637                      input-ext
1638
1639 input-type            = "type" "=" 1*ALPHA
1640                      ; enumerated value as an alpha string (e.g.,
1641                      ; 'sheetFeedAutoRemovableTray') of prtInputType in [RFC3805] mapped
1642                      ; indirectly from the *label* in PrtInputTypeTC in [IANAPRT]
1643
1644 input-media-feed      = "mediafeed" "=" 1*[DIGIT / "-"]
1645                      ; integer value as a numeric string mapped directly from
1646                      ; prtInputMediaDimFeedDirDeclared in [RFC3805]
1647
1648 input-media-xfeed     = "mediaxfeed" "=" 1*[DIGIT / "-"]
1649                      ; integer value as a numeric string mapped directly from
1650                      ; prtInputMediaDimXFeedDirDeclared in [RFC3805]
1651
1652 input-max-capacity    = "maxcapacity" "=" 1*[DIGIT / "-"]
1653                      ; integer value as a numeric string mapped directly from
1654                      ; prtInputMaxCapacity in [RFC3805]
1655
1656 input-level           = "level" "=" 1*[DIGIT / "-"]
1657                      ; integer value as a numeric string mapped directly from
1658                      ; prtInputCurrentLevel in [RFC3805]
1659
1660 input-status          = "status" "=" 1*DIGIT
1661                      ; integer value as a numeric string mapped directly from
1662                      ; prtInputStatus in [RFC3805]
1663
1664 input-name            = "name" "=" 1*ALPHA
1665                      ; string value as an alpha string mapped directly from
1666                      ; prtInputName in [RFC3805]
1667
1668
1669 input-dim-unit         = "dimunit" "=" 1*ALPHA
1670                      ; enumerated value as an alpha string (e.g., 'other') of
1671                      ; prtInputDimUnit in [RFC3805] mapped indirectly from
1672                      ; the *label* in PrtMediaUnitTC in [RFC3805]
1673
1674 input-unit            = "unit" "=" 1*ALPHA
```



```

1675     ; enumerated value as an alpha string (e.g., 'other') of
1676     ; prtInputCapacityUnit in [RFC3805] mapped indirectly from
1677     ; the *label* in PrtCapacityUnitTC in [RFC3805]
1678
1679 input-media-name      = "medianame" "=" 1*ALPHA
1680     ; string value as an alpha string mapped directly from
1681     ; prtInputMediaName in [RFC3805]
1682
1683 input-media-weight    = "mediaweight" "=" 1*[DIGIT / "-"]
1684     ; integer value as a numeric string mapped directly from
1685     ; prtInputMediaWeight in [RFC3805]
1686
1687 input-media-type      = "mediatype" "=" 1*ALPHA
1688     ; string value as an alpha string mapped directly from
1689     ; prtInputMediaType in [RFC3805]
1690
1691 input-media-color     = "mediacolor" "=" 1*ALPHA
1692     ; string value as an alpha string mapped directly from
1693     ; prtInputMediaColor in [RFC3805]
1694
1695 input-ext             = input-extname "=" input-extvalue
1696 input-extname         = 1*[ALPHA / DIGIT / "-"]
1697 input-extvalue        = 1*[ALPHA / DIGIT / "-" / "." / ","]
1698     ; extension point for other MIB values not mapped
1699
1700
1701 input-index           = "index" "=" 1*DIGIT
1702     ; integer value as a numeric string mapped directly from
1703     ; prtInputIndex in [RFC3805] (DEPRECATED)
1704

```

6.5.35.1 Example of printer-input-tray

Figure 8 shows two rows of the machine-readable (non-localized) columnar objects from prtInputTable encoded into corresponding values of "printer-input-tray", presented using the "PAPI" textual syntax encoding [PAPI]. For readability, double-quotes (") are added at the start and end of each string, and line breaks are added after each semicolon. These are not encoded in the values.

Figure 8 - Example values for "printer-input-tray"

```

1712 printer-input-tray[1] = "type=sheetFeedAutoRemovableTray;
1713     mediafeed=110000;mediaxfeed=85000;
1714     maxcapacity=500;
1715     level=100;
1716     status=8;
1717     name=Tray1;
1718     index=1;
1719     dimunit=tenThousandthsOfInches;
1720     unit=sheets;
1721     medianame=na-letter;
1722     mediaweight=-2;
1723     mediatype=stationery;
1724     mediacolor=blue;"

```

```

printer-input-tray[2] = "type=sheetFeedAutoRemovableTray;
                        mediafeed=110000;
                        mediaxfeed=85000;
                        maxcapacity=100;
                        level=20;
                        status=8;
                        name=Tray2;
                        index=2;
                        dimunit=tenThousandthsOfInches;
                        unit=sheets;
                        medianame=na-letter;
                        mediaweight=-2;
                        mediatype=photographic;
                        mediacolor=white;"

```

6.5.36 printer-kind (1setOf type2 keyword | name(MAX))

This REQUIRED Printer Description attribute lists the categories of printing that are supported by the Printer. This information is typically used to conveniently determine whether a Printer supports the kind of printing required by the Client software. Name values define site- or vendor-specific categories while keywords define standard categories. Table 18 lists the keywords defined in this specification.

Table 19 - "printer-kind" Keyword Values

Keyword	Description
'disc'	Supports printing on optical discs such as printable CD-Rs and DVD-Rs
'document'	Supports printing regular document printing on standard cut sheet media such as US Letter, US Legal, US Tabloid, ISO A4, and ISO A3 media
'envelope'	Supports printing on envelopes
'label'	Supports printing on cut labels
'large-format'	Supports printing on cut sheet sizes and roll media larger than ISO A3
'photo'	Supports printing with photographic print quality
'postcard'	Supports printing on postcards
'receipt'	Supports printing receipts on continuous rolls
'roll'	Supports printing Documents or photos on continuous rolls, typically on large-format printers

Printers that support changing the value using the Set-Printer-Attributes operation MUST list "printer-kind" in the "printer-settable-attributes-supported" Printer attribute [RFC3380]. The Get-Printer-Supported-Values operation returns the factory default category values for the Printer.

6.5.37 printer-mandatory-job-attributes (1setOf keyword)

This OPTIONAL Printer Description attribute lists the Job Template and operation attributes a Client MUST supply for a successful Job Creation operation. A Printer MAY reject the Job Creation Operation if the Client does not supply these attributes.

6.5.38 printer-organization (text(MAX))

This REQUIRED Printer Description attribute specifies the name of the organization (e.g., company, university, social club, etc.) that is administratively associated with this Printer. This attribute is semantically equivalent to the 'o' attribute type in the LDAP User Schema [RFC4519].

6.5.39 printer-organizational-unit (text(MAX))

This REQUIRED Printer Description attribute specifies the name of the organizational unit (e.g., 'Human Resources', 'Finance', etc.) that is functionally associated with this Printer. This attribute is semantically equivalent to the 'ou' attribute type in the LDAP User Schema [RFC4519].

6.5.40 printer-output-tray (1setOf octetString(MAX))

This CONDITIONALLY REQUIRED Printer Description attribute lists a set of text strings that describe the Printer's currently available output destinations. Each string contains an unordered sequence of key/value pairs, structured according to the ABNF [STD68] in Figure 9. Table 20 lists the keys defined in this specification, which are derived from the relevant machine-readable (non-localized) columnar objects of each prtOutputEntry from the prtOutputTable object defined in IETF Printer MIB v2 [RFC3805]. A Printer MAY supply site-unique or vendor-unique information using the "output-ext" rule defined in the ABNF. The ABNF is also available externally [ABNF].

Table 20 - "printer-output-tray" Keys

Key	IPP Datatype	Printer MIB Object	Conformance
maxcapacity	Integer	prtOutputMaxCapacity	REQUIRED
name	String	prtOutputName	REQUIRED
pagedelivery	String	prtOutputPageDeliveryOrientation	REQUIRED (1)
remaining	Integer	prtOutputRemainingCapacity	REQUIRED
stackingorder	String	prtOutputStackingOrder	REQUIRED (1)
status	Integer	prtOutputStatus	REQUIRED
type	String	prtOutputType	REQUIRED
unit	String	prtOutputCapacityUnit	RECOMMENDED
offsetstacking	String	prtOutputOffsetStacking	CONDITIONALLY REQUIRED (2)
index	Integer	prtOutputIndex	DEPRECATED (3)

Notes:

1. REQUIRED to support Client provided media load instructions for manual duplexing, envelope, and form printing.
2. CONDITIONALLY REQUIRED for output destinations that support jog offsets.
3. DEPRECATED because correlation with the original MIB order is unimportant.

A Printer MUST support this attribute if it supports the "output-bin" attribute [PWG5100.2]. If supported, this attribute MUST have the same cardinality (contain the same number of

values) as the "output-bin-supported" Printer Description attribute [PWG5100.2]. The i^{th} value in this attribute corresponds to the i^{th} value in the "output-bin-supported" attribute.

A Printer MUST encode the values of "printer-output-tray" using printable characters from the Net-ASCII subset of the US-ASCII character set [RFC5198]. A Printer MUST NOT supply values containing control characters (0x00 - 0x1F and 0x7F).

Figure 9 - ABNF for "printer-output-tray" Values

```

printer-output-tray = *output-required *[output-optional]
    ; set of output elements encoded into one value

output-required      = output-req ";"
output-req            = output-type /
    output-max-capacity /
    output-page-delivery /
    output-remaining /
    output-stacking-order /
    output-status /
    output-name

output-optional       = output-opt ";"

output-opt            = output-index /
    output-unit /
    output-offset-stacking /
    output-ext

output-type           = "type" "=" 1*ALPHA
    ; enumerated value as an alpha string
    ; (e.g., 'removableBin') of prtOutputType
    ; in [RFC3805] mapped indirectly from
    ; the *label* in PprtOutputTypeTC in [IANAPRT]

output-max-capacity   = "maxcapacity" "=" 1*[DIGIT / "-"]
    ; integer value as a numeric string mapped directly from
    ; prtOutputMaxCapacity in [RFC3805]

output-remaining      = "remaining" "=" 1*[DIGIT / "-"]
    ; integer value as a numeric string mapped directly from
    ; prtOutputRemainingCapacity in [RFC3805]

output-status         = "status" "=" 1*DIGIT
    ; integer value as a numeric string mapped directly from
    ; prtOutputStatus in [RFC3805]

output-name           = "name" "=" 1*ALPHA
    ; string value as an alpha string mapped directly from
    ; prtOutputName in [RFC3805]

output-index          = "index" "=" 1*DIGIT
    ; integer value as a numeric string mapped directly from
    ; prtOutputIndex in [RFC3805]

output-unit           = "unit" "=" 1*ALPHA

```

```

1834     ; enumerated value as an alpha string (e.g., 'other') of
1835     ; prtOutputCapacityUnit in [RFC3805] mapped indirectly from
1836     ; the *label* in PrtCapacityUnitTC in [RFC3805]
1837
1838 output-stacking-order = "stackingorder" "=" 1*ALPHA
1839     ; enumerated value as an alpha string (e.g., 'firstToLast') of
1840     ; prtOutputStackingOrder in [RFC3805] mapped indirectly from
1841     ; the *label* in PrtOutputStackingOrderTC in [RFC3805]
1842
1843 output-page-delivery = "pagedelivery" "=" 1*ALPHA
1844     ; enumerated value as an alpha string (e.g., 'faceUp') of
1845     ; prtOutputPageDeliveryOrientation in [RFC3805] mapped indirectly
1846     ; from the *label* in PrtOutputPageDeliveryOrientationTC in
1847     ; [RFC3805]
1848
1849 output-offset-stacking = "offsetstacking" "=" 1*ALPHA
1850     ; enumerated value as an alpha string (e.g., 'notPresent') of
1851     ; prtOutputOffsetStacking in [RFC3805] mapped indirectly from
1852     ; the *label* in PresentOnOff in [RFC3805]
1853
1854 output-ext              = output-extname "=" output-extvalue
1855 output-extname          = 1*[ALPHA / DIGIT / "-"]
1856 output-extvalue         = 1*[ALPHA / DIGIT / "-" / "." / ","]
1857     ; extension point for other MIB values not mapped

```

6.5.40.1 Example of printer-output-tray

Figure 10 shows two rows of the machine-readable (non-localized) columnar objects from prtOutputTable encoded into corresponding values of "printer-output-tray", presented using the "PAPI" textual syntax encoding [PAPI].

Note: Line breaks are shown below for readability of this example. The 'nl' (0x0A) and 'lf' (0x0D) characters are among those disallowed for "printer-output-tray".

Figure 10 - Example values for "printer-output-tray"

```

1865 printer-output-tray[1] = type=removableBin;
1866                        maxcapacity=500;
1867                        remaining=-3;
1868                        status=12;
1869                        name=LeftOutputBin;
1870                        index=1;
1871                        unit=sheets;
1872                        stackingorder=firstToLast;
1873                        pagedelivery=faceDown;
1874                        offsetstacking=notPresent;
1875
1876 printer-output-tray[2] = type=removableBin;
1877                        maxcapacity=300;
1878                        remaining=-3;
1879                        status=0;
1880                        name=RightOutputBin;
1881                        index=2;
1882                        unit=sheets;

```

1883 stackingorder=firstToLast;
1884 pagedelivery=faceDown;
1885 offsetstacking=notPresent;

1886 **6.5.41 printer-strings-languages-supported (1setOf naturalLanguage)**

1887 This CONDITIONALLY REQUIRED Printer Description attribute lists the set of languages
1888 supported by the "printer-strings-uri" Printer Description attribute (section 6.5.42). The
1889 Printer MUST support this attribute if it supports the "printer-strings-uri" attribute.

1890 **6.5.42 printer-strings-uri (uri | no-value)**

1891 This CONDITIONALLY REQUIRED Printer Description attribute references a message
1892 catalog file (section 11.1) that supplies a Client with localized string values for keywords,
1893 enums, and other data types. A Printer MUST support this attribute if it supports unregistered
1894 attributes or unregistered values for standard attributes.

1895 If supported, the Printer MUST return a URI corresponding to the language specified by the
1896 "attributes-natural-language" operation attribute or the no-value out-of-band value if the
1897 Printer does not have a localization for the specified language but otherwise supports the
1898 attribute. The Printer MUST supply an "https" or "http" scheme URI. The Printer SHOULD
1899 supply a URI that follows the Printer resources best practices in section 12.2.

1900 Printers SHOULD provide localized string values for all supported Job Template attributes,
1901 keywords, and enums as well as localized string values for "document-state-reasons", "job-
1902 state-reasons", "notify-event", and "printer-state-reasons" keywords to help ensure all
1903 localized string values use the same language.

1904 A Printer MUST support this attribute if it supports the "printer-strings-languages-supported"
1905 (section 6.5.41) attribute.

1906 **6.5.43 requesting-user-uri-supported (boolean)**

1907 This REQUIRED Printer Description attribute specifies whether the "requesting-user-uri"
1908 (section 6.1.7) operation, "job-originating-user-uri" (section 6.4.1) Job Description, and
1909 "notify-subscriber-user-uri" (section 6.7.2) Subscription Description attributes are
1910 supported. Printers MUST supply a value of 'true'.

1911 **6.5.44 requesting-user-uri-schemes-supported (1setOf uriScheme)**

1912 This RECOMMENDED Printer Description attribute lists the schemes the Printer supports
1913 for the "requesting-user-uri" operation attribute (section 6.1.7).

1914 A Printer that supports this attribute SHOULD support the 'mailto' [RFC6068] and 'urn'
1915 schemes [RFC4122] [STD92].

6.6 Printer Status Attributes

Table 21 lists the Printer Status attributes defined in this specification, each with its corresponding conformance requirements.

Table 21 - New Printer Status Attributes

Attribute	Conformance
device-service-count	DEPRECATED
device-uuid	REQUIRED
printer-config-change-date-time	REQUIRED
printer-config-change-time	REQUIRED
printer-firmware-name	RECOMMENDED
printer-firmware-patches	CONDITIONALLY REQUIRED
printer-firmware-string-version	CONDITIONALLY REQUIRED
printer-firmware-version	CONDITIONALLY REQUIRED
printer-supply	CONDITIONALLY REQUIRED
printer-supply-description	CONDITIONALLY REQUIRED
printer-supply-info-uri	CONDITIONALLY REQUIRED
printer-uuid	CONDITIONALLY REQUIRED

6.6.1 device-service-count (integer(1:MAX))

This DEPRECATED Printer Status attribute indicates the number of Printer instances supported by the Imaging Device.

6.6.2 device-uuid (uri(45))

This REQUIRED Printer Status attribute supplies the globally unique identifier for the Imaging Device. The Printer MUST supply a 45-octet "urn:uuid:" URI [RFC4122].

6.6.3 printer-config-change-date-time (dateTime | 'unknown')

This REQUIRED Printer Status attribute supplies the most recent time any of the Printer's Printer Description attributes were changed, causing a 'printer-config-changed' Printer Event. The Printer updates this attribute's value with the value of its "printer-current-time" [STD92] attribute at power-up and whenever the 'printer-config-changed' Printer Event occurs.

After power-up, until the Printer has its clock set via whatever means it implements to do so, the "printer-current-time" Printer Status attribute will report the 'unknown' out-of-band value [STD92] and this attribute will also report the 'unknown' out-of-band value until the clock is set.

1936 **6.6.4 printer-config-change-time (integer(1:MAX))**

1937 This REQUIRED Printer Status attribute indicates the most recent time any of the Printer's
1938 Printer Description attributes were changed, causing a 'printer-config-changed' Printer
1939 Event. The Printer updates this attribute's value with the value of its "printer-up-time" Printer
1940 Status attribute [STD92] at power-up and whenever the 'printer-config-changed' Printer
1941 Event occurs.

1942 **6.6.5 printer-firmware-name (1setOf name(MAX))**

1943 This RECOMMENDED Printer Status attribute lists the set of names for each of the Printer's
1944 firmware components. This attribute is derived from the "FirmwareName" HCD Health
1945 Assessment attribute [PWG5110.1].

1946 **6.6.6 printer-firmware-patches (1setOf text(MAX))**

1947 This REQUIRED Printer Status attribute lists the set of patches applied to each of the Printer
1948 firmware components named by the "printer-firmware-name" Printer Status attribute (section
1949 6.6.5). This attribute is derived from the "FirmwarePatches" HCD Health Assessment
1950 attribute [PWG5110.1]. A Printer MUST support this attribute if it supports the "printer-
1951 firmware-name" attribute. If this attribute is supported, this attribute MUST have the same
1952 cardinality (contain the same number of values) as the "printer-firmware-name" attribute.
1953 The ith value in this attribute corresponds to the ith value in the "printer-firmware-name"
1954 attribute. A supporting Printer MAY supply a zero-length value for the corresponding
1955 firmware that has no patches applied.

1956 **6.6.7 printer-firmware-string-version (1setOf text(MAX))**

1957 This REQUIRED Printer Status attribute lists the set of version strings for each of the Printer
1958 firmware components named by the "printer-firmware-name" Printer Status attribute (section
1959 6.6.5), represented as a textual string. The format is implementation-defined and not
1960 intended for machine consumption. This attribute is derived from the
1961 "FirmwareStringVersion" HCD Health Assessment attribute [PWG5110.1]. A Printer MUST
1962 support this attribute if it supports the "printer-firmware-name" attribute. If this attribute is
1963 supported, this attribute MUST have the same cardinality (contain the same number of
1964 values) as the "printer-firmware-name" attribute. The ith value in this attribute corresponds
1965 to the ith value in the "printer-firmware-name" attribute.

1966 **6.6.8 printer-firmware-version (1setOf octetString(MAX))**

1967 This REQUIRED Printer Status attribute lists the set of versions for each of the Printer
1968 firmware components named by the "printer-firmware-name" Printer Status attribute (section
1969 6.6.5). This attribute is derived from the "FirmwareVersion" HCD Health Assessment
1970 attribute [PWG5110.1]. A Printer MUST support this attribute if it supports the "printer-
1971 firmware-name" attribute. If this attribute is supported, this attribute MUST have the same
1972 cardinality (contain the same number of values) as the "printer-firmware-name" attribute.

1973 The ith value in this attribute corresponds to the ith value in the "printer-firmware-name"
1974 attribute.

1975 6.6.9 printer-supply (1setOf octetString(MAX))

1976 This CONDITIONALLY REQUIRED Printer Status attribute lists a set of text strings that
1977 describe the Printer's currently installed consumable supplies. Each string contains an
1978 unordered sequence of key/value pairs, structured according to the ABNF [STD68] in Figure
1979 11. Table 22 lists the keys defined in this specification, which are derived from the relevant
1980 machine-readable (non-localized) columnar objects from the prtMarkerSuppliesTable and
1981 prtMarkerColorantTable objects defined in IETF Printer MIB v2 [RFC3805]. Printers that
1982 have consumable or fillable supplies MUST support this attribute. A Printer MAY supply site-
1983 unique or vendor-unique information using the "supply-ext" rule defined in the ABNF. The
1984 ABNF is also available externally [ABNF].

1985 **Table 22 - "printer-supply" Keys**

Key	IPP Datatype	Printer MIB Object	Conformance
type	String	prtMarkerSuppliesType	REQUIRED
maxcapacity	Integer	prtMarkerSuppliesMaxCapacity	REQUIRED
level	Integer	prtMarkerSuppliesLevel	REQUIRED
colorantname	String	prtMarkerColorantValue	REQUIRED (1)
class	String	prtMarkerSuppliesClass	RECOMMENDED
unit	String	prtMarkerSuppliesSupplyUnit	RECOMMENDED
index	Integer	prtMarkerSuppliesIndex	DEPRECATED (2)
markerindex	Integer	prtMarkerSuppliesMarkerIndex	DEPRECATED (2)
colorantindex	Integer	prtMarkerColorantIndex	DEPRECATED (3)
colorantrole	String	prtMarkerColorantRole	DEPRECATED (3)
coloranttonality	Integer	prtMarkerColorantTonality	DEPRECATED (3)

1986 Notes:

- 1987 1. A Printer provides 'no-color' for a supply that do not have a colorant value, and
- 1988 'multi-color' for a supply that has multiple colorant values.
- 1989 2. DEPRECATED because correlation with the MIB is unnecessary.
- 1990 3. DEPRECATED because not widely implemented and of limited value.

1991 A Printer MUST encode the values of "printer-supply" using the Net-ASCII subset of the US-
1992 ASCII character set [RFC5198]. A Printer MUST NOT supply values that contain characters
1993 in the range 0x00 - 0x1F or 0x7F.

1994 **Figure 11 - ABNF for "printer-supply" Values**

```

1995 printer-supply      = *supply-required *[supply-optional]
1996                   ; set of supply elements encoded into one value
1997
1998 supply-required     = supply-req ";"

```

```
1999 supply-req          = supply-type /
2000                        supply-max-capacity /
2001                        supply-level /
2002                        colorant-name
2003
2004 supply-optional       = supply-opt ";"
2005 supply-opt            = supply-class /
2006                        supply-unit /
2007                        supply-index /
2008                        marker-index /
2009                        colorant-index /
2010                        colorant-role /
2011                        colorant-tonality /
2012                        supply-ext
2013
2014 supply-type            = "type" "=" 1*ALPHA
2015                        ; enumerated value as an alpha string (e.g., 'toner') of
2016                        ; prtMarkerSuppliesType in [RFC3805] mapped indirectly from
2017                        ; the *label* in PrtMarkerSuppliesTypeTC in [IANAPRT]
2018
2019 supply-max-capacity    = "maxcapacity" "=" 1*[DIGIT / "-"]
2020                        ; integer value as a numeric string mapped directly from
2021                        ; prtMarkerSuppliesMaxCapacity in [RFC3805]
2022
2023 supply-level           = "level" "=" 1*[DIGIT / "-"]
2024                        ; integer value as a numeric string mapped directly from
2025                        ; prtMarkerSuppliesLevel in [RFC3805]
2026
2027 colorant-name          = "colorantname" "=" 1*ALPHA
2028                        ; string value as an alpha string mapped directly from
2029                        ; prtMarkerColorantValue in [RFC3805]
2030
2031 supply-index           = "index" "=" 1*DIGIT
2032                        ; integer value as a numeric string mapped directly from
2033                        ; prtMarkerSuppliesIndex in [RFC3805]
2034
2035 marker-index           = "markerindex" "=" 1*DIGIT
2036                        ; integer value as a numeric string mapped directly from
2037                        ; prtMarkerSuppliesMarkerIndex in [RFC3805]
2038
2039 supply-class           = "class" "=" 1*ALPHA
2040                        ; enumerated value as an alpha string (e.g., 'other') of
2041                        ; prtMarkerSuppliesClass in [RFC3805] mapped indirectly from
2042                        ; the *label* in PrtMarkerSuppliesClassTC in [RFC3805]
2043
2044 supply-unit            = "unit" "=" 1*ALPHA
2045                        ; enumerated value as an alpha string (e.g., 'other') of
2046                        ; prtMarkerSuppliesSupplyUnit in [RFC3805] mapped indirectly from
2047                        ; the *label* in PrtMarkerSuppliesSupplyUnitTC in [RFC3805]
2048
2049 colorant-index          = "colorantindex" "=" 1*DIGIT
2050                        ; integer value as a numeric string mapped directly from
2051                        ; prtMarkerColorantIndex in [RFC3805]
2052
2053 colorant-role           = "colorantrole" "=" 1*ALPHA
2054                        ; enumerated value as an alpha string (e.g., 'other') of
```

```

2055 ; prtMarkerColorantRole in [RFC3805] mapped indirectly from
2056 ; the *label* in PrtMarkerColorantRoleTC in [RFC3805]
2057
2058 colorant-tonality = "coloranttonality" "=" 1*DIGIT
2059 ; integer value as a numeric string mapped directly from
2060 ; prtMarkerColorantTonality in [RFC3805]
2061
2062 supply-ext = supply-extname "=" supply-extvalue
2063 ; extension point for other MIB values not mapped
2064 ; or site-unique / vendor-unique additional info
2065
2066 supply-extname = 1*[ALPHA / DIGIT / "-"]
2067 supply-extvalue = 1*[ALPHA / DIGIT / "-" / "." / ","]

```

2068 6.6.9.1 Colorant Names in printer-supply

2069 Table 23 lists the standard colorant names with their corresponding reference sRGBA
 2070 values. Colorant names in "printer-supply" other than those defined in Table 23 or defined
 2071 in PWG Media Standardized Names v2.0 (MSN2) [PWG5101.1] MUST conform to the
 2072 Vendor Color Names or Custom Color Names extension formats defined in MSN2, e.g.
 2073 "com.example-light-magenta_ff7ffff", etc.

2074 Table 23 - "printer-supply" Standard Colorant Names

Name	sRGBA Value	Sample
no-color	Undefined	
black	0x000000FF	
light-black	0x808080FF	
blue	0x0000FFFF	
cyan	0x00FFFFFF	
light-cyan	0xE0FFFFFF	
gold	0xFFD700FF	
gray	0x808080FF	
dark-gray	0x404040FF	
light-gray	0xD3D3D3FF	
green	0x008000FF	
magenta	0xFF00FFFF	
light-magenta	0xFF77FFFF	
multi-color	Undefined	
orange	0xFFA500FF	
red	0xFF0000FF	
silver	0xC0C0C0FF	
white	0xFFFFFFFF	
yellow	0xFFFF00FF	
dark-yellow	0xFFCC00FF	
violet	0xEE82EEFF	

6.6.9.2 Example of printer-supply

Figure 12 shows seven rows of the machine-readable (non-localized) columnar objects from `prtMarkerSuppliesTable` and `prtMarkerColorantTable` encoded into the corresponding values of "printer-supply", presented using the "PAPI" textual syntax encoding [PAPI].

Note: Line breaks are shown below for readability of this example. The '\n' (0x0A) and '\f' (0x0D) characters are among those disallowed for "printer-supply".

Figure 12 - Example values for "printer-supply"

```
printer-supply[1] = "type=tonerCartridge;
                    maxcapacity=100;
                    level=56;
                    unit:percent;
                    colorantname=black;
                    class=supplyThatIsConsumed;"

printer-supply[2] = "type=tonerCartridge;
                    maxcapacity=100;
                    level=77;
                    unit:percent;
                    colorantname=cyan;
                    class=supplyThatIsConsumed;"

printer-supply[3] = "type=tonerCartridge;
                    maxcapacity=100;
                    level=19;
                    unit:percent;
                    colorantname=magenta;
                    class=supplyThatIsConsumed;"

printer-supply[4] = "type=tonerCartridge;
                    maxcapacity=100;
                    level=31;
                    unit:percent;
                    colorantname=yellow;
                    class=supplyThatIsConsumed;"

printer-supply[5] = "type=wasteToner;
                    maxcapacity=100;
                    level=67;
                    unit:percent;
                    colorantname=no-color;
                    class=other;"

printer-supply[6] = "type=fuser;
                    maxcapacity=100;
                    level=89;
                    unit:percent;
                    colorantname=no-color;
                    class:other;"
```

```
2124
2125 printer-supply[7] = "type=transferUnit;
2126                      maxcapacity=100;
2127                      level=84;
2128                      unit:percent;
2129                      colorantname=no-color;
2130                      class:other;"
```

2131 **6.6.10 printer-supply-description (1setOf textWithLanguage(MAX))**

2132 This CONDITIONALLY REQUIRED attribute lists the set of textual descriptions mapped
2133 from the SNMP prtMarkerSuppliesDescription object in the prtMarkerSuppliesTable defined
2134 in IETF Printer MIB v2 [RFC3805]. Printers that have consumable or fillable supplies MUST
2135 support this attribute.

2136 This attribute MUST have the same cardinality (contain the same number of values) as the
2137 "printer-supply" attribute (section 6.6.9). The i^{th} value in the "printer-supply-description"
2138 attribute corresponds to the i^{th} value in the "printer-supply" attribute. The Printer MUST
2139 provide values in the character set specified by the "charset-configured" operation attribute
2140 [STD92], which might require conversion from the character set specified by
2141 prtGeneralCurrentLocalization [RFC3805] and prtLocalizationCharacterSet [RFC3808].

2142 The Printer MUST set the naturalLanguage part for each value to match the natural language
2143 specified by prtGeneralCurrentLocalization [RFC3805], prtLocalizationLanguage
2144 [RFC3808], and prtLocalizationCountry [RFC3808].

2145 **6.6.10.1 Example of printer-supply-description**

2146 Figure 13 shows seven rows of the "printer-supply-description" values corresponding to the
2147 "printer-supply" values from Figure 12, presented using the "PAPI" textual syntax encoding
2148 [PAPI].

2149 Note: The naturalLanguage part of each textWithLanguage value is not illustrated in this
2150 example.

2151 **Figure 13 - Example values for "printer-supply-description"**

```
2152 printer-supply-description[1] = "Black Toner Cartridge S/N:16859422"
2153 printer-supply-description[2] = "Cyan Toner Cartridge S/N:16852765"
2154 printer-supply-description[3] = "Magenta Toner Cartridge S/N:16859681"
2155 printer-supply-description[4] = "Yellow Toner Cartridge S/N:16859372"
2156 printer-supply-description[5] = "Waste Toner Bin S/N:16816815"
2157 printer-supply-description[6] = "Fuser Kit S/N:16820223"
2158 printer-supply-description[7] = "Transfer Kit S/N:16821304"
```

2159 **6.6.11 printer-supply-info-uri (uri)**

2160 This CONDITIONALLY REQUIRED attribute supplies an "https" or "http" scheme URI for a
2161 web page that provides controls for managing the Printer and its supplies, e.g., supply

2162 replacement, head alignment, self-test pages, and so forth. Printers that have consumable
2163 or fillable supplies MUST support this attribute.

2164 The web page MAY also provide supply part numbers, links for ordering supplies, and
2165 detailed instructions for replacing supplies. The URI MUST use the "http" or "https" scheme.
2166 The value SHOULD follow the Printer resources best practices in section 12.2.

2167 **6.6.12 printer-uuid (uri(45))**

2168 This REQUIRED attribute supplies the Printer's globally unique identifier encoded as a 45-
2169 octet "urn:uuid" URI [RFC4122]. The Printer MUST report the same "printer-uuid" value
2170 across power cycles and firmware updates. The Printer MUST report the same "printer-uuid"
2171 value on all its network interfaces. The Printer SHOULD use the same UUID value in other
2172 protocol bindings.

2173 A Client cannot use the "printer-uuid" attribute as a Printer identifier in IPP Printer operations.

2174 **6.7 Subscription Status Attributes**

2175 Table 24 lists the Subscription Status attributes defined in this specification and associated
2176 conformance requirements for Printer support.

2177 **Table 24 - New Job Status Attributes**

Attribute	Printer Conformance
notify-subscription-uuid	CONDITIONALLY REQUIRED
notify-subscriber-user-uri	CONDITIONALLY REQUIRED

2178 **6.7.1 notify-subscription-uuid (uri(45))**

2179 This CONDITIONALLY REQUIRED Subscription Status attribute specifies a globally unique
2180 identifier that MUST be a 45-octet "urn:uuid" URI [RFC4122]. The Printer generates the
2181 globally unique identifier when it creates a new Subscription object. A Printer MUST support
2182 this attribute if it supports "IPP: Event Notifications and Subscriptions" [RFC3995]. A Client
2183 MUST NOT use this attribute as a Subscription identifier in IPP subscription operations. A
2184 Printer MAY use the value of this attribute as a Subscription identifier for other protocol
2185 bindings.

2186 **6.7.2 notify-subscriber-user-uri (uri)**

2187 This CONDITIONALLY REQUIRED Subscription Status attribute supplies a URI for the most
2188 authenticated user who submitted the subscription creation request as defined in section
2189 8.1. A Printer MUST support this attribute if it supports "IPP: Event Notifications and
2190 Subscriptions" [RFC3995].

7. Obsolete Attributes, Operations, and Values

7.1 Obsolete Attributes

Table 25 lists the attributes that are OBSOLETE.

Table 25 - Obsolete Attributes

Attribute	Explanation
job-pages-completed-current-copy	RFC 3381 is obsolete
pages-completed-current-copy	RFC 3381 is obsolete
pages-per-subset	Redundant with "job-pages-per-set" [PWG5100.1]
pages-per-subset-supported	"pages-per-subset" is obsolete

7.2 Obsolete Values

Table 26 lists the attribute values that are OBSOLETE.

Table 26 - Obsolete Values

Attribute	Value	Explanation
ipp-features-supported	'job-save'	The "job-save" attribute [PWG5100.11] is obsolete.

8. Additional Semantics for Existing Operations

8.1 All Operations: "requesting-user-uri"

Clients MAY supply and Printers MUST accept the "requesting-user-uri" operation attribute (section 6.1.7) whenever the Printer accepts the "requesting-user-name" operation attribute [STD92].

The Printer sets the "job-originating-user-uri" (section 6.4.1) or "notify-subscriber-user-uri" (section 6.7.2) attribute as applicable to the most authenticated URI that it can obtain from the authentication service over which the IPP operation was received. The Printer uses the "requesting-user-uri" operation attribute value supplied by the Client only if an authenticated URI is not available.

2208 **8.2 Create-Job, Print-Job, Print-URI: "client-info"**

2209 Clients MAY supply and Printers MUST support the "client-info" operation attribute (section
2210 6.1.1) for the Job Creation Operations (Create-Job, Print-Job, and Print-URI). When the
2211 "client-info" operation attribute is supplied in a Job Creation Operation, the Printer copies
2212 the value into the Job's "client-info" Job Status attribute (section 6.4.1).

2213 **8.3 Get-Printer-Attributes Operation: "first-index" and "limit"**

2214 If a Printer supports the "media-col-database" Printer Description attribute [PWG5100.7] or
2215 the "finishings-col-database" [PWG5100.1], then the Printer SHOULD support the "first-
2216 index" (section 6.1.4) and "limit" ([STD92]) operation attributes to allow a Client to request
2217 limits to the number of "media-col-database" values or "finishings-col-database" values the
2218 Printer returns in the response.

2219 **8.4 Get-Subscriptions Operation: "first-index" and "limit"**

2220 If a Printer includes the 0x0019 'Get-Subscriptions' enum value [RFC3995] in its "operations-
2221 supported" Printer Description attribute [STD92], the Printer MUST support the "first-index"
2222 operation attribute (section 6.1.4) in conjunction with the "limit" operation attribute ([STD92])
2223 to allow a Client to request the index of the first Subscription object returned in the response.

2224 **8.5 Get-Jobs Operation: "first-index" and "limit"**

2225 Clients MAY provide and Printers MUST support the "first-index" operation attribute (section
2226 6.1.4) in conjunction with the "limit" operation attribute ([STD92]) to select the first Job object
2227 that is returned in the response.

2228 **8.6 Get-Documents Operation: "first-index" and "limit"**

2229 If the Printer supports the Get-Documents operation, Clients MAY provide and Printers
2230 MUST support the "first-index" operation attribute (section 6.1.4) in conjunction with the
2231 "limit" operation attribute [STD92] to select the first Document object that is returned in the
2232 response.

2233 **8.7 Print-Job, Print-URI, Send-Document, and Send-URI Operations:**
2234 **"document-metadata"**

2235 Clients MAY supply and Printers MUST support the "document-metadata" (section 6.1.1)
2236 operation attribute in the Print-Job, Print-URI, Send-Document, or Send-URI operations.

2237 If the Printer conforms to the IPP Document Object [PWG5100.5], the Printer MUST copy
2238 the attribute value to the "document-metadata" Document Status attribute (section 6.3.1),

2239 otherwise the Printer MUST copy the attribute value to the "document-metadata" Job Status
2240 attribute (section 6.4.2).

2241 **8.8 Print-Job, Print-URI, Send-Document, and Send-URI Operations:** 2242 **"document-password"**

2243 If the Printer supports the "document-password" (section 6.1.3) operation attribute, Clients
2244 MAY supply it in a Print-Job, Print-URI, Send-Document, or Send-URI operation. The Printer
2245 MUST treat the attribute value as private and confidential, MUST retain the value as long as
2246 the corresponding Job and Document are retained, MUST NOT persist the value beyond
2247 the life of the Job or Document, MUST NOT return the value in the response to the request,
2248 and MUST NOT set any Job or Document object attribute with the value of the "document-
2249 password" attribute.

2250 If the Printer receives a request supplying the "document-password" operation attribute prior
2251 to negotiation of a TLS session, it MUST return the 'client-error-bad-request' status code to
2252 the Client.

2253 If the Printer determines that the supplied "document-password" value is not correct, it MUST
2254 return the 'client-error-document-password-error' (section 10.1) status code to the Client if a
2255 response has not already been sent and add the 'document-password-error' keyword to the
2256 "job-state-reasons" and, if supported, "document-state-reasons" attributes.

2257 If the Printer determines that the supplied "document-password" value is correct but the
2258 Document does not allow printing, it MUST return the 'client-error-document-permission-
2259 error' status code to the Client if a response has not already been sent and add the
2260 'document-permission-error' keyword to the "job-state-reasons" and, if supported,
2261 "document-state-reasons" attributes.

2262 **8.9 Validate-Job Operation: "document-password"**

2263 Clients MUST NOT send the "document-password" operation attribute (section 6.1.3) in a
2264 Validate-Job request. Printers MUST reject a Validate-Job request containing a "document-
2265 password" operation attribute and return the client-error-bad-request status code.

2266 **8.10 Validate-Job Operation: "preferred-attributes"**

2267 Printers MAY support returning the values for specific Job Template attributes that would
2268 actually be used (or that the Printer would prefer to use) based on the Job Creation attributes
2269 included in the Validate-Job request. Each Job Template attribute is returned as a member
2270 attribute in the "preferred-attributes" attribute in the Operation Attributes Group.

2271 Printers indicate their support for this functionality by listing the Job Template attributes that
2272 may be returned in the "preferred-attributes-supported" Printer Description attribute (section
2273 6.5.19).

2274 8.11 Validate-Job Operation: "profile-uri-actual"

2275 In a Validate-Job operation response, the Printer includes the "profile-uri-actual" operation
 2276 attribute to indicate which ICC color profile the Printer will use for the given Job Template
 2277 attributes. A Printer MUST support this attribute if it supports the "printer-icc-profiles" Printer
 2278 Description attribute (section 6.5.33).

2279 9. Additional Values and Semantics for Existing Attributes

2280 9.1 document-state-reasons (1setOf type2 keyword) and job-state- 2281 reasons (1setOf type2 keyword)

2282 Table 27 lists new "document-state-reasons" and "job-state-reasons" keyword values.

2283 Table 27 - New "document-state-reasons" and "job-state-reasons" Keyword Values

Keyword	Description
document-password-error	The Printer detected an incorrect document content password and was unable to unlock the document for printing. This value MUST be supported if the "document-password" (section 6.1.3) operation attribute is supported.
document-permission-error	The Printer was able to unlock the document but the document permissions do not allow for printing. This value MUST be supported if the "document-password" (section 6.1.3) operation attribute is supported.
document-security-error	The Printer detected security issues (virus, trojan horse, or other malicious software) embedded within the document. Whether the Printer aborts the Job and moves it to the 'aborted' state or prints all Documents that do not contain detected security issues and moves the Job to the 'completed' state and adds the 'completed-with-errors' value in the job's "job-state-reasons" attribute depends on implementation and/or site policy. This value SHOULD be supported.
document-unprintable-error	The Printer determined that the document was unprintable. This reason covers any issues of file size, format version, or complexity that would prevent the Printer from printing the document. Whether the Printer aborts the Job and moves it to the 'aborted' state or prints all Documents that do not contain detected

Keyword	Description
	security issues and moves the Job to the 'completed' state and adds the 'completed-with-errors' value in the job's "job-state-reasons" attribute depends on implementation and/or site policy. This value SHOULD be supported.

2284 9.2 media-source (type2 keyword | name(MAX))

2285 This specification adds the new 'virtual' keyword value for the "media-source" member of
 2286 "media-col-ready" and "media-col-database" [PWG5100.7] to indicate a "virtual paper tray",
 2287 which allows a Printer to indicate that it can produce a particular output size from some other
 2288 media source (e.g. produce A4 output from A3 media, produce A3 output from A0 media
 2289 using a cutter, etc.).

2290 9.3 orientation-requested (type2 enum)

2291 This specification defines the new 'none' (7) value for the "orientation-requested" Job
 2292 Template attribute [STD92] to enable the Client to request that the Printer not perform any
 2293 rotations for orientation.

2294 9.4 print-content-optimize (type2 keyword)

2295 This specification defines the new 'auto' value for the "print-content-optimize" Job Template
 2296 attribute [PWG5100.7] to enable the Client to request that the Printer automatically
 2297 determine the best optimizations to perform when printing the document.

2298 9.5 printer-state-reasons (1setOf type2 keyword)

2299 Table 28 lists new keyword values for the "printer-state-reasons" Printer Description attribute
 2300 that MUST be supported by Printers that report the corresponding Printer MIB [RFC3805]
 2301 supply types.

2302 Table 28 - New "printer-state-reasons" Keyword Values

Keyword	Description
cleaner-life-almost-over	A cleaning component corresponding to the Printer MIB prtMarkerSuppliesType values cleanerUnit(18) and fuserCleaningPad(19) is nearing the end of its service life.
cleaner-life-over	A cleaning component corresponding to the Printer MIB prtMarkerSuppliesType values cleanerUnit(18) and fuserCleaningPad(19) has reached the end of its service life.

2303 **9.6 uri-authentication-supported (1setOf type2 keyword)**

2304 This specification defines the new 'negotiate' keyword for the "uri-authentication-supported"
2305 Printer Status attribute [STD92] to indicate support for HTTP Negotiate authentication based
2306 on SPNEGO-based Kerberos and NTLM HTTP Authentication in Microsoft Windows
2307 [RFC4559].

2308 **10. Status Codes**

2309 **10.1 client-error-document-password-error (0x418)**

2310 The Client has attempted to submit a Document using the Print-Job, Print-URI, Send-
2311 Document, or Send-URI operations with the wrong passphrase. The Client MAY try the
2312 request again with a new passphrase.

2313 **10.2 client-error-document-permission-error (0x419)**

2314 The Client has attempted to submit a Document using the Print-Job, Print-URI, Send-
2315 Document, or Send-URI operations that does not allow printing. The Client MUST NOT
2316 retry the request using the same document.

2317 **10.3 client-error-document-security-error (0x41A)**

2318 The Printer has detected security issues (virus, trojan horse, or other malicious software)
2319 embedded within the document and will not accept it for printing.

2320 **10.4 client-error-document-unprintable-error (0x41B)**

2321 The Printer has determined that the document is unprintable due to size, format version, or
2322 complexity and will not accept it for printing.

2323 **11. Localization Resources**

2324 The "printer-strings-uri" Printer Description attribute (section 6.5.42) provides the location of
2325 a language-specific, Printer Resident message catalog file resource that supplies
2326 localizations for attribute names, keyword values, and enum values.

2327 **11.1 Message Catalog File Format**

2328 This specification defines a new plain text message catalog format (MIME media type
2329 "text/strings") based on the Apple "strings" file format to allow Printers to supply and Clients
2330 to present localized strings for supported attributes values. A sample English localization for
2331 registered IPP attributes, enum values, and keyword values is available on the PWG FTP

2332 server [PWG-CATALOG]. Boolean, dateTime, and integer values are not localizable using
2333 this format, and name and text values are presumed to already be localized [STD92].

2334 Message catalog files consist of lines of UTF-8 encoded Unicode text following the general
2335 "KEY = VALUE" form. The KEY and VALUE elements can be wrapped in double quotes.:

```
2336 "attribute-name" = "Localized Attribute Name Label";  
2337 "attribute-name.enum-value" = "Localized Enum Value Label";  
2338 "attribute-name.keyword-value" = "Localized Keyword Value Label";  
2339 /* Comment for/to localizers */
```

2340 Lines in a Message Catalog file are terminated by either a single line feed (%x0A) or a
2341 combination of carriage return and line feed (%x0D.0A). All lines in a Message Catalog file
2342 MUST use identical line terminators for consistency. Attribute names and values are limited
2343 to the characters defined for the IPP keyword value syntax [STD92].

2344 Control characters (%x00-1F, %x7F), the double quote (%x22), and the backslash (%x5C)
2345 MUST be escaped in localized strings using a subset of the C language syntax:

2346	\"	A double quote (%x22)
2347	\\	A backslash (%x5C)
2348	\n	A line feed (%x0A)
2349	\r	A carriage return (%x0D)
2350	\t	A horizontal tab (%x09)
2351	###	An octet represented by 3 octal digits

2352 A more complete example is in section 11.3.

2353 11.2 Message Catalog Help Resources

2354 A Message Catalog MAY also contain two types of "help" content. The "_tooltip" suffix can
2355 be used to specify brief help content suitable for contextual presentation such as when a
2356 mouse pointer is hovered over a label. The "_helpurl" suffix can be used to specify a URL to
2357 more detailed, rich and possibly lengthy help content that could be presented in a separate
2358 "help" window. The general form is like so:

```
2359 "attribute-name._tooltip" = "Localized Attribute Name Tooltip"  
2360 "attribute-name._helpurl" = "URL to localized attribute help"  
2361  
2362 "attribute-name.enum-value._tooltip" = "Localized Enum Value Tooltip"  
2363 "attribute-name.enum-value._helpurl" = "URL to localized enum value help"  
2364  
2365 "attribute-name.keyword-value._tooltip" = "Localized Keyword Value Tooltip"  
2366 "attribute-name.keyword-value._helpurl" = "URL to localized keyword value help"
```

2367 A more complete example is in section 11.3.

2368 **11.3 Message Catalog Example**

2369 A Printer that specifies two collections in its "media-col-ready" [PWG5100.7], one that
2370 specifies 'stationery' for its "media-type" value, and the other that specifies 'smi32473-eco-
2371 lite' for its "finishing-template" value, can implement among others the following attributes
2372 and values, represented using "PAPI" syntax:

```
2373 printer-uri="https://myprinter.local.:631/ipp/print"  
2374 printer-strings-uri="https://myprinter.local.:631/ipp/en.strings"  
2375 media-col-ready={  
2376     media-type="stationery"  
2377     media-source="tray-1"  
2378     media-size={  
2379         x-dimension=21000  
2380         y-dimension=29700  
2381     }  
2382     media-top-margin=500  
2383     media-bottom-margin=500  
2384     media-left-margin=500  
2385     media-right-margin=500  
2386 }, {  
2387     media-type="smi32473-eco-lite"  
2388     media-source="tray-2"  
2389     media-color=white  
2390     media-size={  
2391         x-dimension=21590  
2392         y-dimension=27940  
2393     }  
2394     media-bottom-margin=500  
2395     media-left-margin=500  
2396     media-right-margin=500  
2397     media-top-margin=500  
2398 }  
2399 print-color-mode-supported=  
2400     auto,  
2401     color,  
2402     monochrome,  
2403     smi32473-magic-color,  
2404     smi32473-blueprint  
2405 print-color-mode-icc-profiles={  
2406     print-color-mode=smi32473-magic-color  
2407     print-color-mode-profile-uri=https://myprinter.local.:631/sp/magic-color.icc  
2408 }, {  
2409     print-color-mode=smi32473-blueprint  
2410     print-color-mode-profile-uri=https://myprinter.local.:631/sp/blueprint.icc  
2411 }  
2412
```

2413 The Printer's Message Catalog corresponding to "attributes-natural-language" = 'en-us'
2414 might include the following:

```

2415 media-type = "Media Type";
2416 media-type.stationery = "Stationery";
2417 media-type.stationery._tooltip = "Conventional Stationery";
2418 media-type.stationery._helpurl = "///_help/media-types.html";
2419 media-type.smi32473-eco-lite = "PWG Eco Lite";
2420 media-type.smi32473-eco-lite._tooltip = "Lightweight paper that may tear";
2421 media-type.smi32473-eco-lite._helpurl = "///_help/media-types.html#ecolite";
2422 print-color-mode = "Print Color Mode";
2423 print-color-mode.auto = "Automatic";
2424 print-color-mode.auto-monochrome = "Auto Monochrome";
2425 print-color-mode.bi-level = "Text";
2426 print-color-mode.color = "Color";
2427 print-color-mode.highlight = "Highlight";
2428 print-color-mode.monochrome = "Monochrome";
2429 print-color-mode.process-bi-level = "Process Text";
2430 print-color-mode.process-monochrome = "Process Monochrome";
2431 print-color-mode.smi32473-magic-color = "Magic Color";
2432 print-color-mode.smi32473-magic-color._tooltip = "Makes the colors look
2433 magical";
2434 print-color-mode.smi32473-blueprint = "Blueprint";
2435 print-color-mode.smi32473-blueprint._tooltip = "Blue background with white
2436 foreground lines";

```

2437 11.4 Message Catalog ABNF

2438 Figure 14 provides the ABNF [STD68] for files conforming to the “text/strings” MIME media
 2439 type. The ABNF is also available externally [ABNF].

2440 Figure 14 - ABNF for the "text/strings" MIME Media Type

```

2441 CATALOG          = *(MESSAGE / COMMENT / *WSP CFLF / *WSP LF)
2442 MESSAGE          = *WSP DQUOTE %x61-7A *KEYWORD-CHAR DQUOTE
2443                  *WSP "=" *WSP QUOTED-STRING *WSP ";" *WSP (CRLF / LF)
2444 COMMENT          = *WSP "/" 1*CHAR "/" *WSP (CRLF / LF)
2445 KEYWORD-CHAR     = %x61-7A / DIGIT / "\" / "." / "_"
2446 QUOTED-STRING    = DQUOTE 1*QUOTED-CHAR DQUOTE
2447 QUOTED-CHAR      = %x20-21 /
2448                  %x23-5B /
2449                  %x5C.22 /
2450                  %x5C.5C /
2451                  %x5C.6E /
2452                  %x5C.71 /
2453                  %x5C.73 /
2454                  %x5C.30-33.30-37.30-37 /
2455                  %x5D-7E /
2456                  %xC0-DF.80-BF /
2457                  %xE0-EF.80-BF.80-BF /
2458                  %xF0-F7.80-BF.80-BF.80-BF

```

; \" = \" (%x22)
 ; \\ = \ (%x5C)
 ; \n = lf (%x0A)
 ; \r = cr (%x0D)
 ; \t = ht (%x09)
 ; \ooo (octal)

12. Implementation Guidance

12.1 Presets and Triggers

12.1.1 Storing Presets and Triggers

A Client might enable Users to construct new Presets and/or Triggers. In some cases, such as the use case described in section 3.2.22, the User may want to store one or more of those Presets and/or Triggers on the Printer. The Printer will have to advertise it supports updates to its set of Presets, and the Client will have to support identifying that the Printer supports Preset updates and setting an updated set of Presets in the Printer.

A Printer advertises its support for accepting new Presets and Triggers by: supporting the Set-Printer-Attributes and Get-Printer-Supported-Values operations; including Set-Printer-Attributes and Get-Printer-Supported-Values in its “operations-supported” Printer Description attribute [STD92]; including “job-presets-supported” and “job-triggers-supported” in its “printer-settable-attributes-supported” Printer Description attribute [RFC3380]; specifying via a Get-Printer-Supported-Values operation [RFC3380] response the values that the Printer allows in the Set-Printer-Attributes operation for the “job-presets-supported” and “job-triggers-supported” attributes. A Client that implements Printer Preset updates uses the above to detect Printer support.

A Client adds a Preset to a Printer using the Set-Printer-Attributes operation [RFC3380]. The Set-Printer-Attributes operation [RFC3380] semantic is the assignment of a new value to the specified attribute; the attribute and its value sent in the operation request will become the Printer's new attribute value if the operation is successful. For example, to add an additional Preset to a Printer's current “job-presets-supported” attribute, the Client would acquire the current value of the “job-presets-supported” attribute using a Get-Printer-Attributes operation, append or insert the new Preset collection into the set, then perform a Set-Printer-Attributes operation to apply the new set value to the Printer. The result of the Set-Printer-Attributes operation will indicate whether the Printer accepts the update. If the new value is accepted, the Printer will atomically update its “job-presets-supported” attribute. If the Printer rejects the new value for some reason, it ought to return a suitable status code indicating the underlying cause of the rejection.

12.1.2 Presets User Experience Recommendations

Although user experience is outside the scope of this specification, Client implementors ought to consider several important factors when implementing support for IPP Presets to ensure a good user experience.

After the User selects a Preset, the Client ought to allow the User to change individual settings. For example, if a Preset named “photo” includes “print-quality” of 'high' (5) and “print-color-mode” of 'color', and the User selects that Preset, the Client ought to allow the User to change the “print-quality” to some other value even after the User has selected that Preset.

2497 A Client SHOULD list available Presets by name wherever it presents printing choices to the
2498 User. The individual Presets might have originated in the Printer, or they might be local to
2499 the Client. When a User selects a Preset, the Client copies all Preset member attributes to
2500 the Job Creation Operation.

2501 Client implementors might want to consider appropriate behavior in response to the User
2502 changing a setting and then the User chooses a Preset that overrides that earlier selection.
2503 The Client could notify the User that the setting will be changed. Alternately, the Client could
2504 apply the Preset but not change the setting changed by the User, or let the selected Preset
2505 overwrite the previous User selection.

2506 **12.1.3 Triggers User Experience Recommendations**

2507 The Client applies the Preset specified by the Trigger upon detecting that the pending Job's
2508 settings values match all the Trigger's members. Client implementors ought to consider
2509 cases where Triggers are disabled, such as following manual selection by a user, or perhaps
2510 only allowing one Trigger per "print dialog session" to be used. A Trigger ought to be applied
2511 only in response to user input, and not in response to a value being set by another Preset,
2512 a constraint, or some other automatic selection implemented by the Client.

2513 **12.2 Printer Resources**

2514 Printers SHOULD:

- 2515 • provide Printer Resident resources to allow a Client to only communicate with the
2516 network node hosting the Printer.
- 2517 • provide resources using "https:" or "http:" scheme URIs.
- 2518 • provide Secure Transport URIs (e.g. "https" scheme) in content that is itself provided
2519 by Secure Transport.
- 2520 • provide Printer Resident resources at URIs whose port component matches the
2521 Printer's port number as specified by the Printer's "printer-uri" attribute, to ensure
2522 resource access even when other services are disabled on the Printer's network
2523 node. For example, if the value of "printer-uri" is "ipps://my-
2524 printer.local.:631/ipp/print", all the resource URIs SHOULD begin with "https://my-
2525 printer.local.:631/" rather than "https://my-printer.local.:443/".
- 2526 • respond to an HTTP/HTTPS request for a valid resource with an HTTP 200 OK and
2527 the resource itself in the response. Printers SHOULD NOT return an HTTP 3XX
2528 redirection in response to an HTTP request for a valid resource.
- 2529 • support the If-Modified-Since request header [RFC7232] to allow Clients to locally
2530 cache these resources to minimize network bandwidth usage and provide a

2531 responsive user interface. HTTP caching semantics [RFC7234], particularly with
2532 HTTP proxies [RFC7230] MUST be followed.

2533 **13. Conformance Requirements**

2534 **13.1 Printer Conformance Requirements**

2535 For a Printer to claim conformance to this specification, it MUST support:

- 2536 1. The required operations in section 5;
- 2537 2. The required attributes and values defined in section 6;
- 2538 3. The required additional semantics for existing operations defined in section 8;
- 2539 4. The required additional values and semantics for existing operations defined in
2540 section 9;
- 2541 5. The required status codes from section 10;
- 2542 6. The required Localization Resources from section 11;
- 2543 7. The internationalization considerations defined in section 14; and
- 2544 8. The security considerations defined in section 15.

2545 For a Printer to claim conformance with this specification, it MUST NOT support

- 2546 9. The obsolete attributes in section 6.7.1;
- 2547 10. The obsolete values in section 7.2.

2548 **13.2 Client Conformance Requirements**

2549 For a Client to claim conformance to this specification, it MUST support:

- 2550 11. The required operations in section 5;
- 2551 12. The required attributes and values defined in section 6;
- 2552 13. The required additional semantics for existing operations defined in section 8;
- 2553 14. The required additional values and semantics for existing operations defined in
2554 section 9;
- 2555 15. The required status codes from section 10;
- 2556 16. The required Localization Resources from section 11;
- 2557 17. The internationalization considerations defined in section 14; and
- 2558 18. The security considerations defined in section 15.

2559 For a Client to claim conformance with this specification, it MUST NOT support

- 2560 19. The obsolete attributes in section 6.7.1;
- 2561 20. The obsolete values in section 7.2.

14. Internationalization Considerations

Tailor the following standard considerations.

For interoperability and basic support for multiple languages, conforming implementations MUST support:

1. The Universal Character Set (UCS) Transformation Format -- 8 bit (UTF-8) [STD63] encoding of Unicode [UNICODE] [ISO10646]; and
2. The Unicode Format for Network Interchange [RFC5198] which requires transmission of well-formed UTF-8 strings and recommends transmission of normalized UTF-8 strings in Normalization Form C (NFC) [UAX15].

Unicode NFC is defined as the result of performing Canonical Decomposition (into base characters and combining marks) followed by Canonical Composition (into canonical composed characters wherever Unicode has assigned them).

WARNING – Performing normalization on UTF-8 strings received from Clients and subsequently storing the results (e.g., in Job objects) could cause false negatives in Client searches and failed access (e.g., to Printers with percent-encoded UTF-8 URIs now 'hidden').

Implementations of this specification SHOULD conform to the following standards on processing of human-readable Unicode text strings, see:

Unicode Bidirectional Algorithm [UAX9] – left-to-right, right-to-left, and vertical

Unicode Line Breaking Algorithm [UAX14] – character classes and wrapping

Unicode Normalization Forms [UAX15] – especially NFC for [RFC5198]

Unicode Text Segmentation [UAX29] – grapheme clusters, words, sentences

Unicode Identifier and Pattern Syntax [UAX31] – identifier use and normalization

Unicode Collation Algorithm [UTS10] – sorting

Unicode Locale Data Markup Language [UTS35] – locale databases

Implementations of this specification are advised to also review the following informational documents on processing of human-readable Unicode text strings:

Unicode Character Encoding Model [UTR17] – multi-layer character model

Unicode Character Property Model [UTR23] – character properties

Unicode Conformance Model [UTR33] – Unicode conformance basis

15. Security Considerations

The IPP extensions defined in this document require the same security considerations as defined in the Internet Printing Protocol/1.1 [STD92].

Implementations of this specification SHOULD conform to the following standard on processing of human-readable Unicode text strings, see:

Unicode Security Mechanisms [UTS39] – detecting and avoiding security attacks

Implementations of this specification are advised to also review the following informational document on processing of human-readable Unicode text strings:

Unicode Security FAQ [UNISECFAQ] – common Unicode security issues

16. IANA Considerations

16.1 MIME Media Type Registration

Name : Michael Sweet

E-mail : iana@pwg.org

MIME media type name : text

MIME subtype name : Standards Tree – strings

Required parameters : NONE

Optional parameters : NONE

Encoding considerations :

UTF-8 encoded Unicode text.

Security considerations :

Localized strings may be arbitrarily large and could potentially cause a denial-of-service.

Localized strings may contain printf-style format characters that could cause a program to display unintended information or crash.

Interoperability considerations :

NONE

Published specification :

2618 <https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext3v10-20120727-5100.13.pdf>

2619 Applications which use this media :

2620 All Cocoa, NeXTStep, and OpenStep applications

2621 CUPS

2622 IPP Everywhere

2623 Additional information :

2624 1. Magic number(s) :

2625 2. File extension(s) :

2626 strings

2627 3. Macintosh file type code :

2628 Person to contact for further information :

2629 1. Name : Michael Sweet

2630 2. E-mail : iana@pwg.org

2631 Intended usage : Common

2632 Used for providing localizations of English keywords and numeric values.

2633 Author/Change controller :

2634 The Printer Working Group

2635 c/o The IEEE Industry Standards and Technology Organization

2636 445 Hoes Lane

2637 Piscataway, NJ 08854

2638 USA

2639

2640 **16.2 Attribute Registrations**

2641 The attributes defined in this specification will be published by IANA according to the
2642 procedures in the Internet Printing Protocol/1.1 [STD92] in the following location:

2643 <https://www.iana.org/assignments/ipp-registrations>

2644 The registry entries will contain the following information:

2645 Operation attributes:

Reference

2646	-----	-----
2647	client-info (1setOf collection)	[PWG5100.13]
2648	client-key (type2 keyword)	[PWG5100.13]
2649	client-name (name(MAX))	[PWG5100.13]
2650	client-patches (text(MAX) 'no-value')	[PWG5100.13]
2651	client-string-version (text(MAX))	[PWG5100.13]
2652	client-version (octetString(64) 'no-value')	[PWG5100.13]
2653	document-metadata (1setOf octetString(MAX))	[PWG5100.13]
2654	document-password (octetString(1023))	[PWG5100.13]
2655	first-index (integer(1:MAX))	[PWG5100.13]
2656	identify-actions (1setOf type2 keyword)	[PWG5100.13]
2657	preferred-attributes (collection)	[PWG5100.13]
2658	<Any Template attribute>	[PWG5100.13]
2659	requesting-user-uri (uri)	[PWG5100.13]
2660		
2661	Job and Document Template attributes:	Reference
2662	-----	-----
2663	job-error-action (type2 keyword)	[PWG5100.13]
2664	media-overprint (collection)	[PWG5100.13]
2665	media-overprint-distance (integer(0:MAX))	[PWG5100.13]
2666	media-overprint-method (type2 keyword)	[PWG5100.13]
2667	print-color-mode (type2 keyword)	[PWG5100.13]
2668	print-rendering-intent (type2 keyword)	[PWG5100.13]
2669	print-scaling (type2 keyword)	[PWG5100.13]
2670		
2671	Job Status attributes:	Reference
2672	-----	-----
2673	document-metadata (1setOf octetString(MAX))	[PWG5100.13]
2674	job-originating-user-uri (uri)	[PWG5100.13]
2675	job-pages (integer(0:MAX))	[PWG5100.13]
2676	job-pages-completed (integer(0:MAX))	[PWG5100.13]
2677	job-uuid (uri(45))	[PWG5100.13]
2678		
2679	Document Status attributes:	Reference
2680	-----	-----
2681	document-metadata (1setOf octetString(MAX))	[PWG5100.13]
2682	document-uuid (uri(45))	[PWG5100.13]
2683	pages (integer(0:MAX))	[PWG5100.13]
2684	pages-completed (integer(0:MAX))	[PWG5100.13]
2685		
2686	Printer Description attributes:	Reference
2687	-----	-----
2688	document-password-supported (integer(0:1023))	[PWG5100.13]
2689	identify-actions-default (1setOf type2 keyword)	[PWG5100.13]
2690	identify-actions-supported (1setOf type2 keyword)	[PWG5100.13]
2691	ipp-features-supported (1setOf type2 keyword)	[PWG5100.13]
2692	job-constraints-supported (1setOf collection)	[PWG5100.13]
2693	job-error-action-default (type2 keyword)	[PWG5100.13]
2694	job-error-action-supported (1setOf type2 keyword)	[PWG5100.13]
2695	job-presets-supported (1setOf collection)	[PWG5100.13]
2696	preset-category (type2 keyword)	[PWG5100.13]
2697	preset-name (keyword name(MAX))	[PWG5100.13]
2698	job-resolvers-supported (1setOf collection)	[PWG5100.13]
2699	job-triggers-supported (1setOf collection)	[PWG5100.13]
2700	preset-name (keyword name(MAX))	[PWG5100.13]
2701	jpeg-features-supported (1setOf type2 keyword)	[PWG5100.13]

2702	jpeg-k-octets-supported (rangeOfInteger(0:MAX))	[PWG5100.13]
2703	jpeg-x-dimension-supported (rangeOfInteger(0:65535))	[PWG5100.13]
2704	jpeg-y-dimension-supported (rangeOfInteger(1:65535))	[PWG5100.13]
2705	media-overprint-distance-supported (1setOf integer(0:MAX))	[PWG5100.13]
2706	media-overprint-method-supported (1setOf type2 keyword)	[PWG5100.13]
2707	multiple-operation-time-out-action (type2 keyword)	[PWG5100.13]
2708	pdf-k-octets-supported (rangeOfInteger(0:MAX))	[PWG5100.13]
2709	pdf-versions-supported (1setOf type2 keyword)	
2710	preferred-attributes-supported (boolean)	[PWG5100.13]
2711	print-color-mode-default (type2 keyword)	[PWG5100.13]
2712	print-color-mode-icc-profiles (1setOf collection)	[PWG5100.13]
2713	print-color-mode (type2 keyword)	[PWG5100.13]
2714	profile-uri (uri)	[PWG5100.13]
2715	print-color-mode-supported (1setOf type2 keyword)	[PWG5100.13]
2716	print-rendering-intent-default (type2 keyword)	[PWG5100.13]
2717	print-rendering-intent-supported (1setOf type2 keyword)	[PWG5100.13]
2718	print-scaling-default (type2 keyword)	[PWG5100.13]
2719	print-scaling-supported (1setOf type2 keyword)	[PWG5100.13]
2720	printer-dns-sd-name (name(63))	[PWG5100.13]
2721	printer-geo-location (uri)	[PWG5100.13]
2722	printer-get-attributes-supported (1setOf type2 keyword)	[PWG5100.13]
2723	printer-icc-profiles (1setOf collection)	[PWG5100.13]
2724	<Any Template attribute>	[PWG5100.13]
2725	profile-name (name(MAX))	[PWG5100.13]
2726	profile-url (uri)	[PWG5100.13]
2727	printer-icons (1setOf uri)	[PWG5100.13]
2728	printer-input-tray (1setOf octetString(MAX))	[PWG5100.13]
2729	printer-kind (1setOf type2 keyword name(MAX))	[PWG5100.13]
2730	printer-mandatory-job-attributes (1setOf type2 keyword)	[PWG5100.13]
2731	printer-organization (1setOf text(MAX))	[PWG5100.13]
2732	printer-organizational-unit (1setOf text(MAX))	[PWG5100.13]
2733	printer-output-tray (1setOf octetString(MAX))	[PWG5100.13]
2734	printer-strings-languages-supported (1setOf naturalLanguage)	[PWG5100.13]
2735	printer-strings-uri (uri 'no-value')	[PWG5100.13]
2736	requesting-user-uri-supported (boolean)	[PWG5100.13]
2737	requesting-user-uri-schemes-supported (1setOf uriScheme)	[PWG5100.13]
2738		
2739	Printer Status attributes:	Reference
2740	-----	-----
2741	device-service-count (integer(1:MAX))	[PWG5100.13]
2742	device-uuid (uri(45))	[PWG5100.13]
2743	printer-config-change-date-time (dateTime 'unknown')	[PWG5100.13]
2744	printer-config-change-time (integer(1:MAX))	[PWG5100.13]
2745	printer-firmware-name (1setOf name(MAX))	[PWG5100.13]
2746	printer-firmware-patches (1setOf text(MAX))	[PWG5100.13]
2747	printer-firmware-string-version(1setOf text(MAX))	[PWG5100.13]
2748	printer-firmware-version(1setOf octetString(MAX))	[PWG5100.13]
2749	printer-supply (1setOf octetString(MAX))	[PWG5100.13]
2750	printer-supply-description (1setOf text(MAX))	[PWG5100.13]
2751	printer-supply-info-uri (uri)	[PWG5100.13]
2752	printer-uuid (uri(45))	[PWG5100.13]
2753		
2754	Subscription Description attributes:	Reference
2755	-----	-----
2756	notify-subscriber-user-uri (uri)	[PWG5100.13]
2757	notify-subscription-uuid (uri)	[PWG5100.13]

16.3 Type2 keyword Registrations

The keyword values defined in this specification will be published by IANA according to the procedures in the Internet Printing Protocol/1.1 [STD92] in the following location:

<https://www.iana.org/assignments/ipp-registrations>

The registry entries will contain the following information:

Attributes (attribute syntax)	Reference
Keyword Attribute Value	-----
document-state-reasons (1setOf type2 keyword)	[PWG5100.5]
document-password-error	[PWG5100.13]
document-permission-error	[PWG5100.13]
document-security-error	[PWG5100.13]
document-unprintable-error	[PWG5100.13]
identify-actions (1setOf type2 keyword)	[PWG5100.13]
display	[PWG5100.13]
flash	[PWG5100.13]
sound	[PWG5100.13]
speak	[PWG5100.13]
identify-actions-default (1setOf type2 keyword)	[PWG5100.13]
<Any "identify-actions" keyword value>	[PWG5100.13]
identify-actions-supported (1setOf type2 keyword)	[PWG5100.13]
<Any "identify-actions" keyword value>	[PWG5100.13]
ipp-features-supported (1setOf type2 keyword)	[PWG5100.13]
document-object	[PWG5100.13]
job-save	[PWG5100.13]
none	[PWG5100.13]
page-overrides	[PWG5100.13]
proof-print	[PWG5100.13]
subscription-object	[PWG5100.13]
job-error-action (type2 keyword)	[PWG5100.13]
abort-job	[PWG5100.13]
cancel-job	[PWG5100.13]
continue-job	[PWG5100.13]
suspend-job	[PWG5100.13]
job-error-action-default (type2 keyword)	[PWG5100.13]
<Any "job-error-action" keyword value>	[PWG5100.13]
job-error-action-supported (1setOf type2 keyword)	[PWG5100.13]
<Any "job-error-action" keyword value>	[PWG5100.13]
job-state-reasons (1setOf type2 keyword)	[RFC8011]
document-password-error	[PWG5100.13]
document-permission-error	[PWG5100.13]
document-security-error	[PWG5100.13]
document-unprintable-error	[PWG5100.13]
jpeg-features-supported (1setOf type2 keyword)	[PWG5100.13]
none	[PWG5100.13]
arithmetic	[PWG5100.13]
cmymk	[PWG5100.13]

2809	deep	[PWG5100.13]
2810	icc	[PWG5100.13]
2811	lossless	[PWG5100.13]
2812	progressive	[PWG5100.13]
2813		
2814	multiple-operation-time-out-action (type2 keyword)	[PWG5100.13]
2815	abort-job [PWG5100.13]	
2816	hold-job [PWG5100.13]	
2817	process-job [PWG5100.13]	
2818		
2819	print-color-mode (type2 keyword)	[PWG5100.13]
2820	auto [PWG5100.13]	
2821	auto-monochrome	[PWG5100.13]
2822	bi-level [PWG5100.13]	
2823	color [PWG5100.13]	
2824	highlight [PWG5100.13]	
2825	monochrome [PWG5100.13]	
2826	process-bi-level	[PWG5100.13]
2827	process-monochrome	[PWG5100.13]
2828	print-color-mode-default (type2 keyword)	[PWG5100.13]
2829	<Any "print-color-mode" keyword value>	[PWG5100.13]
2830	print-color-mode-supported (1setOf type2 keyword)	[PWG5100.13]
2831	<Any "print-color-mode" keyword value>	[PWG5100.13]
2832		
2833	print-content-optimize (type2 keyword)	[PWG5100.7]
2834	auto [PWG5100.13]	
2835		
2836	print-rendering-intent (type2 keyword)	[PWG5100.13]
2837	absolute [PWG5100.13]	
2838	auto [PWG5100.13]	
2839	perceptual [PWG5100.13]	
2840	relative [PWG5100.13]	
2841	relative-bpc [PWG5100.13]	
2842	saturation [PWG5100.13]	
2843	print-rendering-intent-default (type2 keyword)	[PWG5100.13]
2844	<Any "print-rendering-intent" keyword value>	[PWG5100.13]
2845	print-rendering-intent-supported (1setOf type2 keyword)	[PWG5100.13]
2846	<Any "print-rendering-intent" keyword value>	[PWG5100.13]
2847		
2848	printer-get-attributes-supported (1setOf type2 keyword)	[PWG5100.13]
2849	<Any Job Template attribute>	
2850	<Any Operation attribute at the Job level>	
2851		
2852	printer-mandatory-job-attributes (1setOf type2 keyword)	[PWG5100.13]
2853	<Any Job Template attribute>	
2854	<Any Operation attribute at the Job level>	
2855		
2856	printer-state-reasons (1setOf type2 keyword)	[RFC8011]
2857	cleaner-life-almost-over	[PWG5100.13]
2858	cleaner-life-over	[PWG5100.13]
2859		
2860	uri-authentication-supported (1setOf type2 keyword)	[RFC8011]
2861	negotiate	[PWG5100.13]

16.4 Type2 enum Registrations

The enum values defined in this specification will be published by IANA according to the procedures in the Internet Printing Protocol/1.1 [STD92] in the following location:

<https://www.iana.org/assignments/ipp-registrations>

The registry entries will contain the following information:

Attributes (attribute syntax)			
Enum Value	Enum Symbolic Name		Reference
-----	-----		-----
finishings (1setOf type2 enum)			[RFC8011]
60	trim-after-pages		[PWG5100.13]
61	trim-after-documents		[PWG5100.13]
62	trim-after-copies		[PWG5100.13]
63	trim-after-job		[PWG5100.13]
operations-supported (1setOf type2 enum)			[RFC8011]
0x003C	Identify-Printer		[PWG5100.13]
0x003D	Validate-Document		[PWG5100.13]
orientation-requested (type2 enum)			[RFC8011]
7	none		[PWG5100.13]

16.5 Operation Registrations

The operations defined in this specification will be published by IANA according to the procedures in the Internet Printing Protocol/1.1 [STD92] in the following location:

<https://www.iana.org/assignments/ipp-registrations>

The registry entries will contain the following information:

Operation Name	Reference
-----	-----
Create-Job (extension)	[PWG5100.13]
Create-Job-Subscription (extension)	[PWG5100.13]
Create-Printer-Subscription (extension)	[PWG5100.13]
Get-Documents (extension)	[PWG5100.13]
Get-Jobs (extension)	[PWG5100.13]
Get-Printer-Attributes (extension)	[PWG5100.13]
Get-Subscriptions (extension)	[PWG5100.13]
Identify-Printer	[PWG5100.13]
Print-Job (extension)	[PWG5100.13]
Print-URI (extension)	[PWG5100.13]
Send-Document (extension)	[PWG5100.13]
Send-URI (extension)	[PWG5100.13]
Validate-Document	[PWG5100.13]
Validate-Job (extension)	[PWG5100.13]

2903 16.6 Status Code Registrations

2904 The status codes defined in this specification will be published by IANA according to the
2905 procedures in the Internet Printing Protocol/1.1 [STD92] in the following location:

2906 <https://www.iana.org/assignments/ipp-registrations>

2907 The registry entries will contain the following information:

2908	Value	Status Code Name	Reference
2909	-----	-----	-----
2910	0x0400:0x04FF - Client Error:		
2911	0x0418	client-error-document-password-error	[PWG5100.13]
2912	0x0419	client-error-document-permission-error	[PWG5100.13]
2913	0x041A	client-error-document-security-error	[PWG5100.13]
2914	0x041B	client-error-document-unprintable-error	[PWG5100.13]

2915 17. Overview of Changes

2916 17.1 IPP Driverless Printing Extensions v.2.0

2917 The following changes were made to IPP Job and Printer Extensions - Set 3 [PWG5100.13-
2918 2012]:

- 2919 • Renamed the specification to have a more specific and meaningful title;
- 2920 • Resolved all errata from PWG errata tracking site
2921 (<https://www.pwg.org/dynamo/issues.php?L+P-1+S-2+I0+E0+Z13+Q>);
- 2922 • Imported the IPP Presets registration document definitions to add them to this
2923 specification, and extended it by defining the new "preset-category" member attribute
2924 to provide a modern replacement for the venerable but non-extensible "print-quality"
2925 attribute;
- 2926 • Defined the new "client-info" operation attribute to replace "document-format-details"
2927 for reporting client accounting information;
- 2928 • Defined the new "requesting-user-uri-schemes-supported" Printer Description
2929 attribute;
- 2930 • Imported the "jpeg-k-octets-supported", "jpeg-x-dimension-supported", "jpeg-y-
2931 dimension-supported", "pdf-k-octets-supported", "pdf-versions-supported", "print-
2932 scaling-default", "print-scaling-supported", "printer-dns-sd-name", and "printer-kind"
2933 Printer Description attributes from PWG 5100.16-2013;
- 2934 • Reviewed and rewrote a number of the use cases and added new use cases that
2935 should have already been there;

- 2936 • Rewrote the descriptions for "printer-input-tray", "printer-output-tray" and "printer-
2937 supply" to make them more concise and precise;
- 2938 • Added message catalog syntax extensions and semantics for "_tooltip" and "_helpurl"
2939 (content from the latest draft of HELPME);
- 2940 • Added extensions to "print-color-mode" and "print-quality" (content from the latest
2941 draft of PQI);
- 2942 • Added "print-color-mode-icc-profiles" and "print-quality-hints-supported" (content
2943 from the latest draft of PQI);
- 2944 • Added the "media-overprint" and "media-overprint-type" Job Template Attributes;
- 2945 • The "subscription-uuid" attribute was corrected to be "notify-subscription-uuid" to
2946 match how it was registered in the IANA registry in 2012;
- 2947 • The "multiple-operations-timeout-action" attribute's name was corrected to be
2948 "multiple-operations-time-out-action" to match how it was registered in the IANA
2949 registry in 2012; and
- 2950 • Deprecated the "device-service-count" attribute because IPP System Service v1.0
2951 [PWG5100.22]. provides a better solution and this attribute is almost entirely unused
2952 in the IPP ecosystem at large.

2953 18. References

2954 18.1 Normative References

2955

- 2956 [BCP14] S. Bradner, "Key words for use in RFCs to Indicate Requirement
2957 Levels", RFC 2119/BCP 14, March 1997,
2958 <https://datatracker.ietf.org/doc/html/bcp14>
- 2959 [DCMITERMS] "DCMI Metadata Terms", October 2010,
2960 <http://dublincore.org/documents/dcmi-terms/>
- 2961 [IANAPRT] IANA Printer MIB, Internet Assigned Numbers Authority, July 2019,
2962 <https://www.iana.org/assignments/ianaprinter-mib/ianaprinter-mib>
- 2963 [IANA-PEN] "Private Enterprise Numbers - SMI Network Management Private
2964 Enterprise Codes", Internet Assigned Numbers Authority (IANA),
2965 <https://www.iana.org/assignments/enterprise-numbers/>

2966	[ISO10646]	"Information technology -- Universal Coded Character Set (UCS)",
2967		ISO/IEC 10646:2011
2968	[IPPLABEL]	M. Sweet, "IPP Label Printing Extensions v1.0", February 2020,
2969		https://ftp.pwg.org/pub/pwg/ipp/registrations/reg-ipplabel10-
2970		20200213.pdf
2971	[JFIF]	E. Hamilton, "JPEG File Interchange Format Version 1.02",
2972		September 1992, https://www.w3.org/Graphics/JPEG/jif3.pdf
2973	[PWG5100.2]	Hastings, T. and R. Bergman, "Internet Printing Protocol (IPP):
2974		"output-bin" attribute extension", February 2001,
2975		https://ftp.pwg.org/pub/pwg/candidates/cs-ippoutputbin10-20010207-
2976		5100.2.pdf
2977	[PWG5100.3]	K. Ocke, T. Hastings, "Internet Printing Protocol (IPP): Production
2978		Printing Attributes – Set1", PWG 5100.3-2001, February 2001,
2979		https://ftp.pwg.org/pub/pwg/candidates/cs-ippprodprint10-20010212-
2980		5100.3.pdf
2981	[PWG5100.5]	D. Carney, T. Hastings, P. Zehler, "Standard for The Internet Printing
2982		Protocol (IPP): Document Object", PWG 5100.5-2003, October 2003,
2983		https://ftp.pwg.org/pub/pwg/candidates/cs-ippdocobject10-20031031-
2984		5100.5.pdf
2985	[PWG5100.6]	P. Zehler, R. Herriot, K. Ocke, "Internet Printing Protocol: Page
2986		Overrides", PWG 5100.6, October 2003,
2987		https://ftp.pwg.org/pub/pwg/candidates/cs-ipppageoverride10-
2988		20031031-5100.6.pdf
2989	[PWG5100.7]	M.Sweet, "IPP Job Extensions v2.0", August 2019,
2990		https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobext20-20190816-
2991		5100.7.pdf
2992	[PWG5100.12]	R. Bergman, H. Lewis, I. McDonald, M. Sweet, "IPP Version 2.0, 2.1,
2993		and 2.2", PWG 5100.12-2015, October 2015,
2994		https://ftp.pwg.org/pub/pwg/standards/std-ipp20-20151030-
2995		5100.12.pdf
2996	[PWG5101.1]	R. Bergman, T. Hastings, "Standard for Media Standardized Names
2997		2.0", PWG 5101.1-2013, March 2013,
2998		https://ftp.pwg.org/pub/pwg/candidates/cs-pwgmsn20-20130328-
2999		5101.1.pdf
3000	[PWG5106.1]	P. Zehler, H. Lewis, I. McDonald, J. Thrasher, W. Wagner, "PWG
3001		Standardized Imaging System Counters 1.1", PWG 5106.1-2007, April

3002		2007, https://ftp.pwg.org/pub/pwg/candidates/cs-wimscount11-20070427-5106.1.pdf
3003		
3004	[RFC2083]	T. Boutell, "PNG (Portable Network Graphics) Specification Version 1.0", RFC 2083, March 1997,
3005		https://datatracker.ietf.org/doc/html/rfc2083
3006		
3007	[RFC2817]	R. Khare, S. Lawrence, "Upgrading to TLS Within HTTP/1.1", RFC 2817, May 2000, https://datatracker.ietf.org/doc/html/rfc2817
3008		
3009	[RFC3380]	T. Hastings, R. Herriot, C. Kugler, H. Lewis, "Internet Printing Protocol (IPP): Job and Printer Set Operations", RFC 3380, September 2002,
3010		https://datatracker.ietf.org/doc/html/rfc3380
3011		
3012	[RFC3805]	R. Bergman, H. Lewis, I. McDonald, "Printer MIB v2", RFC 3805, June 2004, https://datatracker.ietf.org/doc/html/rfc3805
3013		
3014	[RFC3808]	I. McDonald, "IANA Charset MIB", RFC 3808, June 2004,
3015		https://datatracker.ietf.org/doc/html/rfc3808
3016	[RFC3995]	R. Herriot, T. Hastings, "IPP Event Notifications and Subscriptions", RFC 3995, March 2005, https://datatracker.ietf.org/doc/html/rfc3995
3017		
3018	[RFC3998]	C. Kugler, T. Hastings, H. Lewis, "IPP: Job and Printer Operations", RFC 3998, March 2005, https://datatracker.ietf.org/doc/html/rfc3998
3019		
3020	[RFC4122]	P. Leach, M. Mealling, R. Salz, "A Universally Unique IDentifier (UUID) URN Namespace", RFC 4122, July 2005,
3021		https://datatracker.ietf.org/doc/html/rfc4122
3022		
3023	[RFC4519]	A. Sciberras, "Lightweight Directory Access Protocol (LDAP): Schema for User Applications", RFC 4519, June 2006,
3024		https://datatracker.ietf.org/doc/html/rfc4519
3025		
3026	[RFC4559]	K. Jaganathan, L. Zhu, J. Brezak, "SPNEGO-based Kerberos and NTLM HTTP Authentication in Microsoft Windows", RFC 4559, June 2006, https://datatracker.ietf.org/doc/html/rfc4559
3027		
3028		
3029	[RFC5013]	J. Kunze, T. Baker, "The Dublin Core Metadata Element Set", RFC 5013, August 2007, https://datatracker.ietf.org/doc/html/rfc5013
3030		
3031	[RFC5198]	J. Klensin, M. Padlipsky, "Unicode Format for Network Interchange", RFC 5198, March 2008, https://datatracker.ietf.org/doc/html/rfc5198
3032		
3033	[RFC5646]	A. Phillips, M. Davis, "Tags for Identifying Languages", September 2009, https://datatracker.ietf.org/doc/html/rfc5646
3034		

- 3035 [RFC5870] A. Mayrhofer, C. Spanring, "A Uniform Resource Identifier for
3036 Geographic Locations ('geo' URI)", RFC 5870, June 2010,
3037 <https://datatracker.ietf.org/doc/html/rfc5870>
- 3038 [RFC6068] M. Duerst, L. Masinter, J. Zawinski, "The 'mailto' URI Scheme", RFC
3039 6068, October 2010, <https://datatracker.ietf.org/doc/html/rfc6068>
- 3040 [RFC6762] S. Cheshire, M. Krochmal, "Multicast DNS", RFC 6762, February
3041 2013, <https://datatracker.ietf.org/doc/html/rfc6762>
- 3042 [RFC6763] S. Cheshire, M. Krochmal, "DNS-Based Service Discovery", RFC
3043 6763, February 2013, <https://datatracker.ietf.org/doc/html/rfc6763>
- 3044 [RFC7230] R. Fielding, J. Reschke, "Hypertext Transfer Protocol (HTTP/1.1):
3045 Message Syntax and Routing", RFC 7230, June 2014,
3046 <https://datatracker.ietf.org/doc/html/rfc7230>
- 3047 [RFC7232] R. Fielding, J. Reschke, "Hypertext Transfer Protocol (HTTP/1.1):
3048 Conditional Requests", RFC 7232, June 2014,
3049 <https://datatracker.ietf.org/doc/html/rfc7232>
- 3050 [RFC7234] R. Fielding, M. Nottingham, J. Reschke, "Hypertext Transfer Protocol
3051 (HTTP/1.1): Caching", RFC 7234, June 2014,
3052 <https://datatracker.ietf.org/doc/html/rfc7234>
- 3053 [RFC7472] I. McDonald, M. Sweet, "IPP over HTTPS Transport Binding and 'ipps'
3054 URI Scheme", RFC 7472, March 2015,
3055 <https://datatracker.ietf.org/doc/html/rfc7472>
- 3056 [RFC8446] E. Rescorla, "The Transport Layer Security (TLS) Protocol Version
3057 1.3", RFC 8446, August 2018,
3058 <https://datatracker.ietf.org/doc/html/rfc8446>
- 3059 [STD63] F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC
3060 3629/STD 63, November 2003,
3061 <https://datatracker.ietf.org/doc/html/std63>
- 3062 [STD66] T. Berners-Lee, R. Fielding, L. Masinter, "Uniform Resource Identifier
3063 (URI): Generic Syntax", RFC 3986/STD 66, January 2005,
3064 <https://datatracker.ietf.org/doc/html/std66>
- 3065 [STD68] D. Crocker, P. Overell, "Augmented BNF for Syntax Specifications:
3066 ABNF", RFC 5234/STD 68, January 2008,
3067 <https://datatracker.ietf.org/doc/html/rfc5234>
- 3068 [STD92] M. Sweet, I. McDonald, "Internet Printing Protocol/1.1", STD 92, June
3069 2018, <https://datatracker.ietf.org/doc/html/std92>

- 3070 [UAX9] Unicode Consortium, "Unicode Bidirectional Algorithm", UAX#9,
3071 February 2019, <https://www.unicode.org/reports/tr9>
- 3072 [UAX14] Unicode Consortium, "Unicode Line Breaking Algorithm", UAX#14,
3073 February 2019, <https://www.unicode.org/reports/tr14>
- 3074 [UAX15] M. Davis, M. Duerst, "Unicode Normalization Forms", Unicode
3075 Standard Annex 15, February 2019,
3076 <https://www.unicode.org/reports/tr15>
- 3077 [UAX29] Unicode Consortium, "Unicode Text Segmentation", UAX#29,
3078 February 2019, <https://www.unicode.org/reports/tr29>
- 3079 [UAX31] Unicode Consortium, "Unicode Identifier and Pattern Syntax",
3080 UAX#31, February 2019, <https://www.unicode.org/reports/tr31>
- 3081 [UNICODE] Unicode Consortium, "Unicode Standard", Version 12.0.0, March
3082 2019, <https://www.unicode.org/versions/Unicode12.0.0/>
- 3083 [UTS10] Unicode Consortium, "Unicode Collation Algorithm", UTS#10, April
3084 2019, <https://www.unicode.org/reports/tr10>
- 3085 [UTS35] Unicode Consortium, "Unicode Locale Data Markup Language",
3086 UTS#35, March 2019, <https://www.unicode.org/reports/tr35>
- 3087 [UTS39] Unicode Consortium, "Unicode Security Mechanisms", UTS#39, May
3088 2019, <https://www.unicode.org/reports/tr39>
- 3089 [WGS84] National Geospatial-Intelligence Agency, "Department of Defense
3090 World Geodetic System 1984, Its Definition and Relationships With
3091 Local Geodetic Systems, Third Edition", NIMA Technical Report
3092 TR8350.2, January 2000, [http://earth-
3093 info.nga.mil/GandG/publications/tr8350.2/wgs84fin.pdf](http://earth-info.nga.mil/GandG/publications/tr8350.2/wgs84fin.pdf)
- 3094 [X.520] International Telecommunication Union, "Information technology -
3095 Open Systems Interconnection - The Directory: Selected attribute
3096 types", ITU-T X.520, November 2008

3097 **18.2 Informative References**

- 3098 [ABNF] M. Sweet, I. McDonald, P. Zehler, "ABNF for IPP Job and Printer
3099 Extensions Set 3",
3100 [https://ftp.pwg.org/pub/pwg/informational/pwg5100.13-abnf-
3101 20190708.txt](https://ftp.pwg.org/pub/pwg/informational/pwg5100.13-abnf-20190708.txt)
- 3102 [CUPS] "CUPS Project Home Page", <https://www.cups.org/>

3103	[IPPSAMPLE]	PWG "ippsample" GitHub Project, https://github.io/istopwg/ippsample
3104	[ISO15076-1]	"Image technology colour management — Architecture, profile format and data structure — Part 1: Based on ICC.1:2010", ISO/IEC 15076-1:2010
3105		
3106		
3107	[ISO15930-1]	
3108		"Graphic technology -- Prepress digital data exchange -- Use of PDF - - Part 1: Complete exchange using CMYK data (PDF/X-1 and PDF/X-1a)", ISO 15930-1:2001, 2001
3109		
3110	[ISO15930-3]	
3111		
3112		"Graphic technology -- Prepress digital data exchange -- Use of PDF - - Part 3: Complete exchange suitable for colour-managed workflows (PDF/X-3)", ISO 15930-3:2002
3113	[ISO15930-4]	"Graphic technology -- Prepress digital data exchange using PDF -- Part 4: Complete exchange of CMYK and spot colour printing data using PDF 1.4 (PDF/X-1a)", ISO 15930-4:2003
3114		
3115		
3116	[ISO15930-6]	
3117		"Graphic technology -- Prepress digital data exchange using PDF -- Part 6: Complete exchange of printing data suitable for colour-managed workflows using PDF 1.4 (PDF/X-3)", ISO 15930-6:2003
3118		
3119	[ISO15930-7]	
3120		
3121		"Graphic technology -- Prepress digital data exchange using PDF -- Part 7: Complete exchange of printing data (PDF/X-4) and partial exchange of printing data with external profile reference (PDF/X-4p) using PDF 1.6", ISO 15930-7:2010
3122		
3123	[ISO15930-8]	
3124		
3125		"Graphic technology -- Prepress digital data exchange using PDF -- Part 8: Partial exchange of printing data using PDF 1.6 (PDF/X-5)", ISO 15930-8:2010, 2010
3126	[ISO16612-2]	"Graphic technology -- Variable data exchange -- Part 2: Using PDF/X-4 and PDF/X-5 (PDF/VT-1 and PDF/VT-2)", ISO 16612-2:2010
3127		
3128	[ISO19005-1]	"Document Management – Electronic document file format for long term preservation – Part 1: Use of PDF 1.4 (PDF/A-1)", ISO 19005-1:2005, October 2005
3129		
3130		
3131	[ISO19005-2]	
3132		"Document management – Electronic document file format for long-term preservation – Part 2: Use of ISO 32000-1 (PDF/A-2)", ISO 19005-2:2011, June 2011
3133		
3134	[ISO19005-3]	
3135		"Document management -- Electronic document file format for long-term preservation -- Part 3: Use of ISO 32000-1 with support for embedded files (PDF/A-3)", ISO 19005-3:2012, October 2012
3136		

- 3137 [ISO23504-1] "Document management applications — Raster image transport and
3138 storage — Part 1: Use of ISO 32000 (PDF/R-1)", ISO 23504-1:2020,
3139 <https://www.iso.org/standard/75804.html>
- 3140 [ISO32000-1] ISO, "Document management -- Portable document format -- Part 1:
3141 PDF 1.7", ISO 32000-1:2008, <https://www.iso.org/standard/51502.html>
- 3142 [ISO32000-2] ISO, "Document management -- Portable document format -- Part 2:
3143 PDF 2.0", ISO 32000-2:2017, <https://www.iso.org/standard/63534.html>
- 3144 [MACOS] macOS Operating System, Apple Inc., <https://www.apple.com/>
- 3145 [NEXTSTEP] NeXTSTEP Operating System, Apple Inc.,
3146 <https://en.wikipedia.org/wiki/NeXTSTEP>
- 3147 [PAPI] A. Hlava, N. Jacobs, M. Sweet, "Open Standard Print API (PAPI)",
3148 July 2005, [https://prdownloads.sourceforge.net/openprinting/PAPI-](https://prdownloads.sourceforge.net/openprinting/PAPI-specification.pdf?download)
3149 [specification.pdf?download](https://prdownloads.sourceforge.net/openprinting/PAPI-specification.pdf?download)
- 3150 [PWG-CATALOG] Sample English localization of registered IPP attributes and values,
3151 <https://ftp.pwg.org/pub/pwg/ipp/examples/ipp.strings>
- 3152 [PWG5100.1] S. Kennedy, M. Sweet, "IPP Finishings 2.1", PWG 5100.1-2017,
3153 February 2017, [https://ftp.pwg.org/pub/pwg/candidates/cs-](https://ftp.pwg.org/pub/pwg/candidates/cs-ippfinishings21-20170217-5100.1.pdf)
3154 [ippfinishings21-20170217-5100.1.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ippfinishings21-20170217-5100.1.pdf)
- 3155 [PWG5100.11] T. Hastings, D. Fullman, "IPP: Job and Printer Operations - Set 2",
3156 PWG 5100.11-2010, October 2010,
3157 [https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext10-](https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext10-20101030-5100.11.pdf)
3158 [20101030-5100.11.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext10-20101030-5100.11.pdf)
- 3159 [PWG5100.13-2012] M. Sweet, I. McDonald, "IPP: Job and Printer Extensions - Set 3
3160 (JPS3)", PWG 5100.13-2012, July 2012,
3161 [https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext3v10-](https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext3v10-20120727-5100.13.pdf)
3162 [20120727-5100.13.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ippjobprinterext3v10-20120727-5100.13.pdf)
- 3163 [PWG5100.14] M. Sweet, I. McDonald, A. Mitchell, J. Hutchings, "IPP Everywhere",
3164 5100.14-2013, January 2013,
3165 [https://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128-](https://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128-5100.14.pdf)
3166 [5100.14.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128-5100.14.pdf)
- 3167 [PWG5100.22] I. McDonald, M. Sweet, "IPP System Service v1.0 (SYSTEM)",
3168 5100.22-2019, November 2019,
3169 [https://ftp.pwg.org/pub/pwg/candidates/cs-ippsystem10-20191122-](https://ftp.pwg.org/pub/pwg/candidates/cs-ippsystem10-20191122-5100.22.pdf)
3170 [5100.22.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ippsystem10-20191122-5100.22.pdf)
- 3171 [PWG5102.3] R. Seeler, "Portable Document Format: Image-Streamable (PDF/is)",
3172 March 2004, PWG 5102.3-2004,

- 3173 [https://ftp.pwg.org/pub/pwg/candidates/cs-ifxpdfis10-20040315-](https://ftp.pwg.org/pub/pwg/candidates/cs-ifxpdfis10-20040315-5102.3.pdf)
3174 [5102.3.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-ifxpdfis10-20040315-5102.3.pdf)
- 3175 [PWG5110.1] J. Murdock, J. Thrasher, "PWG Hardcopy Device Health Assessment
3176 Attributes", PWG 5110.1-2013, April 2013,
3177 [https://ftp.pwg.org/pub/pwg/candidates/cs-idsattributes10-20130401-](https://ftp.pwg.org/pub/pwg/candidates/cs-idsattributes10-20130401-5110.1.pdf)
3178 [5110.1.pdf](https://ftp.pwg.org/pub/pwg/candidates/cs-idsattributes10-20130401-5110.1.pdf)
- 3179 [RFC4559] K. Jaganathan, L. Zhu, J. Brezak, "SPNEGO-based Kerberos and
3180 NTLM HTTP Authentication in Microsoft Windows", RFC 4559, June
3181 2006, <https://datatracker.ietf.org/doc/html/rfc4559>
- 3182 [UTR17] Unicode Consortium "Unicode Character Encoding Model", UTR#17,
3183 November 2008, <https://www.unicode.org/reports/tr17>
- 3184 [UTR23] Unicode Consortium "Unicode Character Property Model", UTR#23,
3185 May 2015, <https://www.unicode.org/reports/tr23>
- 3186 [UTR33] Unicode Consortium "Unicode Conformance Model", UTR#33,
3187 November 2008, <https://www.unicode.org/reports/tr33>
- 3188 [UNISECFAQ] Unicode Consortium "Unicode Security FAQ", November 2016,
3189 <https://www.unicode.org/faq/security.html>

3190 19. Authors' Addresses

3191 Primary authors (v2.0):

3192 Smith Kennedy
3193 HP Inc.
3194 11311 Chinden Blvd.
3195 Boise ID 83714

3196 Primary authors (v1.0):

3197 Michael Sweet
3198 Apple Inc.
3199 10431 N. De Anza Blvd.
3200 MS 38-4LPT
3201 Cupertino CA 95014

3202
3203 Ira McDonald
3204 High North
3205 PO Box 221
3206 Grand Marais, MI 49839

3207
3208 Peter Zehler

3209 Xerox Corporation
3210 800 Phillips Road
3211 M/S 128-25E
3212 Webster, NY 14580-9701

3213 Send comments to the PWG IPP Mailing List:

3214 ipp@pwg.org (subscribers only)

3215 To subscribe, see the PWG IPP workgroup web page:

3216 <https://www.pwg.org/ipp/>

3217 Implementers of this specification document are encouraged to join the IPP Mailing List to
3218 participate in any discussions of clarification issues and review of registration proposals for
3219 additional attributes and values.

3220 The authors would also like to thank the following individuals for their contributions to this
3221 specification:

3222 Robert Herriot - Xerox
3223 Andrew Mitchell - Hewlett-Packard
3224 Kirk Ocke - Xerox

3225 20. Change History

3226 This section will be removed when this document is published.

3227 20.1 February 22, 2022

3228 Several changes:

- 3229 • Changed normative requirement for the "client-info" Job Status attribute to be
3230 REQUIRED since the "client-info" operation attribute is REQUIRED;
- 3231 • Added the "client-info-supported" Printer Description attribute to list the supported
3232 members of "client-info";
- 3233 • Rewrote section 8.2 discussing the use of "client-info" and changed it to only be used
3234 for Job Creation Operations; and
- 3235 • Fixed entries in Table 12 - New Printer Description Attributes.

3236 **20.2 February 7, 2022**

3237 First Prototype draft. Updated with changes from November 2021 F2F and January 13, 2022
3238 teleconference:

- 3239 • Removed the "client-key" member of "client-info" because the consensus is that the
3240 PWG ought not engage in creating and maintaining its own OS / application name
3241 registry;
- 3242 • Added in use cases from PWG 5199.11 "Job Accounting with IPP v1.0" to section 3;
- 3243 • Added job accounting model justification in section 4;
- 3244 • Added "client-info" subsection to section 8 for all operations; and
- 3245 • Replaced all instances of "Job Creation Request" with "Job Creation Operation".

3246 **20.3 November 2, 2021**

3247 Updated to resolve feedback from the May 2021 F2F and the August 2021 F2F to finally
3248 stabilize this draft specification and get it close to prototype stage:

- 3249 • Deleted many comments that were already resolved;
- 3250 • Fixed definition of "print-processing-attributes-supported";
- 3251 • Expanded and clarified the "preset-category" member of "job-presets-supported";
- 3252 • Deprecated several keys for "printer-supply";
- 3253 • Many editorial / language fixes.

3254 **20.4 May 1, 2021**

3255 Several changes:

- 3256 • Replaced the "print-quality-col" with the extension to "job-presets-supported"
3257 described in the ["IPP Print Quality Discussion"](#) wiki page, including the "preset-
3258 category" member attribute.
- 3259 • Added the "print-processing-attributes-supported" Printer Description attribute as a
3260 simplified and more appropriately named replacement for "print-quality-hints-
3261 supported".
- 3262 • Restructured the wording of the design requirements (editorial changes)

- 3263 • Rewrote and moved section 4.4 to become the new section 4.9 "Print Quality" that
3264 now describes the Print Quality extensibility feature as an extension of the Presets
3265 feature.
- 3266 • Updates some of the IANA registrations but will wait for consensus approval on rest
3267 of document before completing that.
- 3268 • Did NOT update attribute descriptions to match the new template (yet) to avoid a
3269 revision filled with confusing redlines that distract from the above technical20210501
3270 changes.

3271 **20.5 October 29, 2020**

3272 A few additions and editorial changes:

- 3273 • Fixed the URLs on the first page, which were not using the right file name (!).
- 3274 • Adopted the "jpeg-features-supported" Printer Description attribute registered by
3275 Apple in 2015 (<https://ftp.pwg.org/pub/pwg/ipp/registrations/apple-jpegfeatures-20151021.txt>)
3276
- 3277 • Adopted the "printer-firmware-name", "printer-firmware-string-version", "printer-
3278 firmware-patches" and "printer-firmware-version" Printer Description attributes
3279 registered by Apple in 2019 (<https://ftp.pwg.org/pub/pwg/ipp/registrations/apple-printer-firmware-20190724.txt>)
3280
- 3281 • Fixed the first line of the description for "jpeg-k-octets-supported", "jpeg-x-dimension-
3282 supported", "jpeg-y-dimension-supported", "pdf-k-octets-supported", and "pdf-
3283 versions-supported" to match the current convention (e.g. "This CONDITIONALLY
3284 REQUIRED Printer Description attribute..." rather than "The "xxx-supported Printer
3285 Description attribute...")
- 3286 • Added the "pdf-features-supported" attribute since there are some optional PDF
3287 features that a Printer might support but has no way to advertise this support.

3288 **20.6 October 27, 2020**

3289 Accepted all changes and made all edits as per the following minutes:

- 3290 • ippv2-f2f-minutes-20200205.pdf
- 3291 • ippv2-concall-minutes-20200220.pdf
- 3292 • ippv2-concall-minutes-20200227.pdf
- 3293 • ippv2-concall-minutes-20200312.pdf
- 3294 • ippv2-concall-minutes-20200319.pdf
- 3295 A summary of changes includes the following:
 - 3296 • Copied all content into a new copy of the Working Draft template to try to resolve
 - 3297 MS Word formatting issues
 - 3298 • Defined the new "print-quality-col" Job Template attribute and related "print-quality-
 - 3299 col-supported" and "print-quality-col-database" to provide a modern replacement for
 - 3300 the venerable but non-extensible "print-quality" attribute, incorporating elements from
 - 3301 the previously proposed "print-quality-hints-supported" / "print-quality-attributes-
 - 3302 supported", which was removed
 - 3303 • Defined the new "client-info" operation attribute to provide a modern replacement for
 - 3304 the deprecated "document-format-details" [PWG5100.7] [PWG5100.5] for reporting
 - 3305 client metadata
 - 3306 • Defined the new "requesting-user-uri-schemes-supported" Printer Description
 - 3307 attribute
 - 3308 • Imported the "jpeg-k-octets-supported", "jpeg-x-dimension-supported", "jpeg-y-
 - 3309 dimension-supported", "pdf-k-octets-supported", "pdf-versions-supported", "print-
 - 3310 scaling-default", "print-scaling-supported", "printer-dns-sd-name", and "printer-kind"
 - 3311 Printer Description attributes from PWG 5100.16-2013
 - 3312 • Reviewed and rewrote a number of the use cases and added new use cases that
 - 3313 should have already been there
 - 3314 • Rewrote the descriptions for "printer-input-tray", "printer-output-tray" and "printer-
 - 3315 supply" to make them more concise
 - 3316 • Removed the proposed "eliminate-margins" because this use case is now
 - 3317 supported by two new keywords for "imposition-template" ('banner', 'banner-
 - 3318 compressed') defined in IPP Production Printing Extensions v2.0 [PPX].
 - 3319 • Removed section 11 "Relationship of Impressions, Pages, and Sheets" since RFC
 - 3320 8011 has clarified definitions. (That section's content may end up being moved to
 - 3321 5100.19.)

20.7 February 4, 2020

Accepted all changes and made all recommended edits from the November F2F review, which stopped at section 6.2. Made substantial changes from the beginning:

- Reviewed and rewrote the Abstract and Introduction to better match the new title
- Reviewed and rewrote a number of the use cases and added new use cases that should have already been there
- Created table in section 4 mapping coordinating Use Cases and Design Requirements to the corresponding IPP additions defined in the body of the document
- Imported the IPP Presets registration document definitions to add them to this specification
- Resolved the "vendor-keyword" question for "print-color-mode" by adding "keyword" to the syntax and referring the reader to STD92 section 7.3.
- Modified a number of conformance requirements.

20.8 November 21, 2019

Updated yet again to address a few more issues:

- Added the 'virtual' keyword for "media-source" as per IPP teleconference minutes from 20191107
- Added 'enterprise' and 'production' keywords to "ipp-features-supported" as per 20190828 IPP F2F minutes
- Removed comments that should have been removed following their approval in earlier reviews.

20.9 November 20, 2019

Updated to resolve a few minor issues:

- 3347 • Added the "eliminate-margins-supported" Printer Description attribute and listed it in
3348 Table 13
- 3349 • Resolved text formatting problems in Table 4
- 3350 • Removed "pages-per-subset" since it has been obsoleted.

3351 **20.10 October 3, 2019**

3352 Updated to resolve all issues from August 1, 2019 conference call and August 2019 F2F
3353 reviews:

- 3354 • Resolved all errata comments
- 3355 • Renamed "soft-proof-icc-profiles" to "print-color-mode-icc-profiles" but chose
3356 alternate member attribute names
- 3357 • Refactored tables for "printer-input-tray", "printer-output-tray" and "printer-supply" to
3358 make them easier to read and reference / cross-reference with RFC 3805, and spell
3359 checked all OID names to hopefully eliminate all typos that were in the old 5100.13
- 3360 • Added conformance tables to all section 6 subsections.
- 3361 • Created a new section 12 "Printer Resource Best Practices" from old section 14.4
3362 and referenced that for HTTP and URI best practices
- 3363 • Refactored and updated the Conformance Requirements section
- 3364 • Added "eliminate-margins" to support the "Eliminate Upper and Lower Margins" and
3365 "Banner printing" use cases requested by Canon and HP
- 3366 • Added "media-overprint" to support the "Borderless adjustment setting" use case
3367 requested by Canon and HP
- 3368 • Enhanced the description for "print-quality-hints-supported"

3369 **20.11 July 24, 2019**

3370 Copied in definitions for "soft-proof-icc-profiles" and "print-quality-hints-supported" and
3371 extensions for "print-color-mode" and "print-quality" (from the latest draft of PQI). Also
3372 resolved the following feedback from Mike Sweet's email to the IPP WG reflector:

- 3373 • Drop "-5100.13" from the filename (that's just for published documents)
- 3374 • Global: remove section references for all of the STD92 stuff (which would have
3375 been RFC2911 sections - they don't match up
- 3376 • Global: fix "reference not found" issues (section 5.6.7 at least)
- 3377 • I think much of the 1.x content should be moved to a new section 4 model, with the
3378 new operations starting in section 5 (in keeping with our current template)
- 3379 • pages-per-subset should be deprecated, per our prior discussions on the subject
3380 (finishings 2.1 has the job-pages-per-set attribute)
- 3381 • Might as well add the "auto-monochrome" value for print-color-mode as
3382 RECOMMENDED.
- 3383 • Section 5.3 attributes that are READ-ONLY should be moved to a new Job Status
3384 Attributes section.
- 3385 • Section 5.4 should be "Subscription Status Attributes"
- 3386 • Section 5.5 attributes that are READ-ONLY should be moved to a new Document
3387 Status Attributes section.
- 3388 • Section 5.5.3 (pages) attribute is READ-WRITE (Document Description), per prior
3389 registry correction
- 3390 • Section 5.5.5 (pages-completed-current-copy) should be obsoleted since RFC 3381
3391 has been obsoleted
- 3392 • Section 5.6 attributes that are READ-ONLY should be moved to a new Printer
3393 Status Attributes section.
- 3394 • Section 5.6.7, table 5: obsolete "job-save" since that spec is getting obsoleted,
3395 move "proof-print" to the new EPX spec? - Section 5.6.8: The examples seem to

- 3396 have a mix of quote styles, maybe "1setOf syntax" instead of "1setOf <type-def- for-
3397 job-template-attribute>"
- 3398 • Global: Remove all of the media-xxx attributes since those are part of Job
3399 Extensions v2.0
- 3400 • Section 5.6.17, table 6: fix title ("multiple-operation-time-out-action")
- 3401 • Section 5.6.18: Obsolete
- 3402 • Section 5.6.29 (printer-get-attributes-supported): Drop 'type2'
- 3403 • Section 5.6.33 (printer-mandatory-job-attributes): Drop 'type2'
- 3404 • Section 5.6.39.4 example should probably be expanded to include yellow and black
3405 (to be realistic), along with a wasteToner or wasteInk entry?
- 3406 • Section 5.6.40.2 sync up with printer-supply example changes
- 3407 • Section 6.10: Remove (all media-col stuff is in JOBEXT 2.0)
- 3408 • Section 7.2: Remove? I think these are now defined in Finishings 2.1?
- 3409 • Sections 7.6 and 7.7: Remove (all media-col stuff is in JOBEXT 2.0)
- 3410 • Section 9.1: Example on lines 1878 to 1881 uses left/right quotes instead of straight
3411 quotes
- 3412 • Section 10: Might want to wordsmith this now that STD92 has clarified things? Line
3413 1985 also has a typo ("page-range" instead of "page-ranges").
- 3414 • Table 15: Remove (obsolete) job-cover-back and job-cover-front attributes, change
3415 "pages-ranges" to "page-ranges", remove (obsolete) sheet-collate,
- 3416 • Section 11.2: "printer-config-change-time" (not printer-description-change-time),
3417 remove media-xxx references.
- 3418 • Global: Update RFC2616 references to the corresponding new RFC723x RFCs...
- 3419 • Section 16: Drop "using Address style", you should be listed as primary author,
3420 move/update others as appropriate
- 3421 References to PWG 5100.11 were left largely unchanged because it and related documents
3422 are in a state of flux.

3423 **20.12 July 10, 2019**

3424 Initial revision for v1.1.

3425 • Copied all content from previous JPS3 MS Word document into latest template

3426 • Resolved all errata from PWG errata tracking site
3427 (<https://www.pwg.org/dynamo/issues.php?L+P-1+S-2+I0+E0+Z13+Q>)

3428 • Copied in message catalog syntax extensions and semantics for "_tooltip" and
3429 "_helpurl" from the latest draft of HELPME

3430 • Copied in extensions for "print-color-mode", "print-quality", from the latest draft of
3431 PQI